

2010

OffshoreBook

*An introduction to the
offshore industry*



Offshore Center Danmark

The copyright of this book vests by Offshore Center Danmark.
All rights reserved.

The information contained herein is the property of above and is
supplied without liability for errors or omissions.

No part may be reproduced or used except as authorised by
contract or other written permission.

This edition of OffshoreBook is part of the project Focus at
Danish Offshore that is funded by The European Social Fund,
Growth Forum in the Region of Southern Denmark and the
offshore industry.



Offshore Center Danmark

Offshore Center Danmark

OffshoreBook

Juli 2010

Editor: Morten Holmager mh@offshorecenter.dk

Technical Consulting: Mahmoud Redda mr@offshorecenter.dk

Graphic production: Jan C Design & Kommunikation

Preface

OffshoreBook serves as an introduction to the offshore industry. Through 15 chapters, the offshore industry is presented at a basic level, suitable for everybody.

The target group is new employees, students and employees in need for an overview or insight into specialities different from their own.

The main focus of OffshoreBook is oil and gas, but also covered is offshore wind and wave and tidal energy.

OffshoreBook is mainly focused on Danish and North Sea conditions but is also suitable for offshore industries based elsewhere.

OffshoreBook is edited by Offshore Center Danmark in collaboration with external editors. Offshore Center Danmark wish to thank all of our members who have contributed to the book and especially those who have helped in the editing work including, but not limited to: Ramboll Oil & Gas, COWI, DONG Energy, GEUS, the Danish Energy Authority, Aalborg University Esbjerg, the University of Southern Denmark and the technical school in Esbjerg - EUC Vest.

We hope that you will enjoy reading our book, which has been published to mark the 5th year anniversary of Offshore Center Danmark.



Content

Chapter 1: Basic Information about Oil and Gas
Chapter 2: Reservoir (Geology and Exploration)
Chapter 3: Drilling Operations
Chapter 4: Offshore Structures
Chapter 5: Production of Oil and Gas
Chapter 6: Pipelines
Chapter 7: Oil and Gas Activities in the North Sea
Chapter 8: Oil and Gas Production in Denmark
Chapter 9: Upstream and Downstream Logistics
Chapter 10: Downstream
Chapter 11: Decommissioning
Chapter 12: Health, Safety, Environment and Quality (HSEQ)
Chapter 13: Offshore Wind Energy
Chapter 14: Wave and Tidal Energy
Chapter 15: Education and Training in Denmark

1 - Basic Information about Oil and Gas

1-1	Overview	9
1-1-1	What is Crude Oil?.....	9
1-1-2	What is Natural Gas?.....	10
1-2	Formation of Oil and Gas	11
1-2-1	How are Oil and Gas formed?.....	11
1-2-2	The origins Oil and Natural Gas?.....	11
1-2-3	Natural Gas under the Earth.....	13
1-2-4	Migration of Oil and Gas.....	13
1-3	Oil and Gas Characteristics	14
1-3-1	Chemical Composition of Oil.....	14
1-3-2	Main Constituents of Natural Gas.....	15
1-3-3	Other Constituents of Natural Gas (Impurities).....	15
1-3-4	Types of Natural Gas.....	16
1-4	Oil and Gas Reserves	16
1-4-1	Oil Production & Consumption.....	16
1-4-2	World Oil Reserves.....	17
1-4-3	North Sea Oil.....	17
1-4-3-1	North Sea Oil Licensing.....	18
1-4-3-2	Reserves and Production in the North Sea.....	18
1-4-3-3	Future Production.....	18
1-4-4	World Gas Reserves.....	19
1-4-5	North Sea Gas.....	19

2 - Reservoir - Geology and Exploration

2-1	What is an Oil and Natural Gas Reservoir?	21
2-2	Earth Movements	22
2-3	Geology	23
2-3-1	Sediment Maturation.....	23
2-3-2	Reservoir Rock.....	23
2-3-3	Traps.....	23
2-3-4	Seal/Trap Rock.....	23
2-3-5	Measuring the Properties of Rocks.....	24
2-4	Looking for Oil and Gas	25
2-5	Exploration Methods	26
2-6	Reserve Types	26
2-6-1	Proved Reserves.....	26
2-6-2	Unproved Reserves.....	26
2-6-2-1	Probable Reserves.....	26
2-6-2-2	Possible Reserves.....	26

3 - Drilling Operations

3-1	Overview	27
3-1-1	Drilling	27
3-1-2	Completion	27
3-1-3	Production	28
3-1-4	Abandonment	28
3-2	Types of Wells	28
3-3	Well Drilling	29
3-3-1	Preparing to drill.....	29
3-3-2	Setting Up the Rig	29
3-3-3	Drilling the Well	31
3-3-4	Drilling Bits	32
3-3-5	Logging while Drilling	33
3-3-6	Drilling Mud	33
3-3-7	Offshore Chemicals	34
3-3-8	Horizontal Drilling	34
3-4	Well Completion	35
3-4-1	Conducting Drill Stem Test	35
3-4-2	Setting Production Casing	35
3-4-3	Installing Production Tubing	35
3-4-4	Starting Production Flow.....	36
3-4-5	Servicing.....	36
3-4-5-1	Transporting Rig and Rigging Up	36
3-4-5-2	General Servicing	36
3-4-5-3	Special Services.....	36
3-4-5-4	Workover	36
3-5	Oil Extraction	37

4 - Offshore Structures

4-1	Overview	39
4-2	Platform Types	40
4-2-1	Stationary Platforms	40
4-2-1-1	Jacket Platforms.....	40
4-2-1-2	STAR Platforms.....	40
4-2-1-3	Compliant Towers.....	41
4-2-1-4	Semi-submersible Platforms.....	42
4-2-1-5	Tension-leg Platforms TLPs	42
4-2-1-6	Spar Platforms	42
4-3	Jack-up Platforms	43
4-4	Floating Production Systems	43
4-5	Subsea Production Systems	44

4-5-1	Examples of subsea technology in Denmark.....	44
4-6	Halfdan including Sif and Igor	45
4-6-1	Exploration	45
4-6-2	Production Strategy	45
4-6-3	Production Facilities	46
4-6-4	Further development of the Halfdan Field	46
4-7	Siri, North Sea, Denmark	46
4-7-1	Development.....	46
4-7-2	Jacket	46
4-7-3	Hull	47
4-7-4	Tank	47
4-7-5	Flare Tower	47
4-8	South Arne, North Sea, Denmark	47
4-8-1	Production Drilling.....	47
4-8-2	Construction	47
4-8-3	Process Platform Topsides.....	48
4-8-4	Export System	48

5 - Production of Oil and Gas

5-1	How are Oil and Natural Gas produced?	49
5-2-1	Separation Process	50
5-2-1-1	Separator.....	51
5-2-1-2	Scrubber.....	51
5-2-1-3	Knockout	51
5-2-2	Composition	51
5-3	Pumping Equipment for Liquids	52
5-3-1	Types of Pumps	52
5-3-2	Cavitation	53
5-4	Compressor	53
5-4-1	Positive Displacement Compressors	54
5-4-2	Dynamic Compressors	54
5-5	Valves	55
5-5-1	Manual Valves	55
5-5-2	Control Valves	55
5-5-3	Definition	56
5-6	Heat Exchangers	56
5-6-1	Selection	56
5-6-2	Types.....	56

5-7	Control Systems and Safety	57
5-7-1	Computer Control System.....	57
5-7-2	Safety.....	58

6 - Pipelines

6-1	Introduction	59
6-2	What is Piping?	59
6-3	Piping Criteria	60
6-4	Flexibility and Stiffness of Piping	60
6-5	Flexible Pipes	61
6-6	Pipe Design Requirements	61
6-6-1	Authorities Requirements.....	61
6-6-2	Environmental Impact.....	62
6-6-3	Operational Parameters.....	62
6-7	Pipeline Size Determination	62
6-8	Pressure Control System	63
6-9	Pipeline Performance Requirements and Design Criteria	63
6-9-1	Initial Site Survey.....	63
6-9-2	Preliminary Design.....	64
6-9-3	Detailed Route Survey.....	64
6-9-4	Final Design.....	64
6-9-5	Inspection.....	64
6-10	Risk and Safety	65
6-11	Installation	65

7 - Oil and Gas Activities in the North Sea

7-1	Oil and Gas Activities in the North Sea	67
7-1-1	Oil Activities.....	67
7-1-1-1	Denmark.....	68
7-1-1-2	Norway.....	68
7-1-1-3	United Kingdom.....	68
7-1-1-4	The Netherlands.....	68
7-1-2	Gas Activities.....	69
7-1-2-1	Denmark.....	69
7-1-2-2	Norway.....	69
7-1-2-3	United Kingdom.....	70
7-1-2-4	The Netherlands.....	70

8 - Oil and Gas Production in Denmark

8-1	Licenses and Exploration	71
8-1-1	History.....	71
8-1-2	Licensing.....	71
8-1-3	Seismic surveys, etc.....	71
8-1-4	Open Door Procedure.....	71
8-2	6th Licensing Round	73
8-2-1	Relinquishment in the Contiguous Area.....	73
8-3	Producing Fields	74
8-3-1	The Dan Field.....	74
8-3-2	The Gorm Field.....	74
8-3-3	The Halfdan Field.....	74
8-3-4	The Harald.....	76
8-3-5	The Nini Field.....	77
8-3-6	The Tyra Field.....	77
8-3-7	The Valdemar Field.....	78
8-3-8	The South Arne field.....	78

9 - Upstream and Downstream Logistics

9-1	Why Logistics matter	81
9-2	Upstream and Downstream Logistics	81
9-2-1	Logistics upstream.....	82
9-2-2	Logistics downstream.....	82
9-3	Global Patterns of Oil Trade	83
9-3-1	Oil Trade: Highest Volume, Highest Value.....	83
9-3-2	Distance: The Nearest Market first.....	83
9-3-3	Quality, Industry Structure, and Governments.....	83
9-3-4	Crude versus Products.....	83
9-4	Transportation of Oil and Gas	84
9-4-1	Oil Transportation and Environment.....	84
9-4-1-1	Maritime Transport.....	84
9-4-1-2	Oil Transportation by Land.....	84
9-5	Oil Storage in Tank Farms	85
9-6	Gas Transport and Supply	85
9-7	Gas Storage Facilities	86

10 - Downstream

10-1	Downstream	87
10-2	Oil Refinery operation	87
10-2-1	Products of Oil Refineries	88
10-2-1-1	Light distillates	88
10-2-2-2	Middle distillates	89
10-2-2-3	Heavy distillates and residuum	90
10-2-3	Safety and Environmental Concerns	91
10-2-4	Common Process Units found in a Refinery	91
10-3	Petrochemicals	92
10-4	Transportation	94

11 - Decommissioning

11-1	Overview	95
11-2	Regulatory Framework	96
11-3	International Frameworks and Conventions	96
11-3-1	Geneva Convention	96
11-3-2	UNCLOS	96
11-3-3	IMO	96
11-3-4	The London (Dumping) Convention	96
11-3-5	Regional Conventions	96
11-3-6	OSPAR	97
11-4	Decommissioning Options	98
11-4-1	Possible Decommissioning Options	98
11-4-2	Criteria for Decommissioning Solution	98
11-5	Reuse	99
11-6	Explosive Activities	99
11-7	Decommissioning of Offshore Installations in Europe	100
11-7-1	Information Exchange	100
11-7-2	Challenges of Offshore Installations in Europe	100
11-7-2-1	Technical Challenges	100
11-7-2-2	Health and Safety Challenges	101
11-7-2-3	Environmental Challenges	101
11-7-2-4	Economic Challenges	101
11-7-2-5	Construction Challenges	101
11-8	Decommissioning of Offshore Installations in the North Sea	101
11-9	Decommissioning of Offshore Installations in Denmark goes commercial in the Harbor of Esbjerg - over time	102

12 - Health, Safety, Environment and Quality (HSEQ)

12-1	Overview	103
12-2	Hazards and Goals	103
12-3	Procedures	104
12-4	Mindsets	104
12-5	Risk analysis	105

13 - Offshore Wind Energy

13-1	Background	107
13-2	What is Wind Energy?	107
13-3	The Wind Turbine	108
13-3-1	Offshore Foundations	108
13-4	The Offshore Wind Market	110

14 - Wave and Tidal Energy

14-1	Overview	111
14-2	Wave Energy	111
14-3	Wave Power	112
14-4	Tidal Energy	112
14-5	Implications	113
14-6	Danish Position in Wave Energy	113
14-7	Pilot Plants in Europe	114
14-8	Scope for Danish Wave Energy in the North Sea	114
14-9	Danish Concepts	115
14-9-1	Wave Star	115
14-9-2	Wave Dragon	115

15 - Education and Training in Denmark



Chapter 1

Basic Information about Oil and Gas

1-1 Overview

1-1-1 What is Crude Oil?

The oil found in the subsurface is called crude oil and is a mixture of hydrocarbons, which in form range from almost solid to gaseous.

Crude oil is a naturally occurring mixture of hundreds of different hydrocarbon compounds trapped in subsurface rock. These hydrocarbons were created millions of years ago when plant and algae material died and settled on the bottom of streams, lakes, seas and oceans, forming a thick layer of organic material. Subsequent sedimentation covered this layer, applying heat and pressure that 'cooked' the organic material and changed it into the petroleum we extract from the subsurface today.

Crude oils are generally differentiated by the size of the hydrogen rich hydrocarbon molecules they contain. For example, light oil containing lighter hydrocarbons flows easily through wells and pipelines and when refined, produces a large quantity of transportation fuels such as petrol, diesel and jet fuel. Heavy oil containing heavier hydrocarbons, in contrast, requires additional pumping or diluting to be able to flow through wells and pipelines; when refined, it produces proportionally more heating oil and a smaller amount of transportation fuels.

Crude oil is a complex mixture of hydrocarbons with minor proportions of other chemicals such as compounds of sulphur, nitrogen and oxygen. The different parts of the mixture must be separated, before they can be used, and this process is called refining. Crude oil from different parts of the world, or even from different depths in the same oilfield, contains different mixtures of hydrocarbons and other

compounds. This is why it varies from a light-colored volatile liquid to thick, dark, black oil - so viscous that it is difficult to pump from the subsurface.

It is not only the appearance of crude oil that varies. Crudes from different sources have different compositions. Some may have more of the valuable lighter hydrocarbons, and some may have more of the heavier hydrocarbons. The compositions of different crudes are measured and published in assays. This information is used by the refinery in deciding which crudes to buy to make the products that its customers need at any given time.

When crude oil comes out of a well it is often mixed with gases, water and sand. It forms an emulsion with water that looks a bit like caramel. The sand suspended in the emulsion produces this caramel effect. Eventually the sand settles and the water is then removed using de-emulsifying agents. Both sand and water have to be separated from the crude oil, before it can be processed ready for transportation by tanker or pipeline.

The dissolved gases are removed at the well. Once the drilling shaft makes contact with the oil, it releases the pressure in the underground reservoir and the dissolved gases fizz out of solution pushing crude oil to the surface. This is necessary as they might come out of solution and cause a buildup of pressure in a pipe or a tanker.

Crude oil also contains sulphur, which has to be removed from any fractions that are going to be burnt as it forms sulphur dioxide, which contributes to acid rain. Therefore, any fractions that are converted into fuels must pass through so-called hydrofiners, removing the sulphur content.

Crude Source	Paraffins (% vol)	Aromatics (% vol)	Naphthenes (% wt)	Sulfur (approx.)	API gravity (% vol)	Naptha Yield (typical)	Octane No
Nigerian-Light	37	9	54	0.2	36	28	60
Saudi-Light	63	19	18	2	34	22	40
Saudi-Heavy	60	15	25	2.1	28	23	35
Venezuela-Light	35	12	53	2.3	30	2	60
Venezuela-Light	52	14	34	1.5	24	18	50
USA-Midcont. Sweet	-	-	-	0.4	40	-	-
USA-W. Texas Sour	46	22	32	1.9	32	33	55
North Sea-Brent	50	16	34	0.4	37	31	50

Table 1.1 - Typical approximate characteristics and properties and gasoline potential of various crudes (representative average numbers).

Basic Information about Oil and Gas

Crude oil can be measured in a number of different ways. Production and distribution companies commonly measure crude oil in barrels (bbl). In SI units 1 bbl is 0.158983 m³. While measuring by volume is useful, oil can also be measured as a source of energy. The energy unit used is Barrels of Oil Equivalent (BOE), which denotes the amount of energy contained in one barrel of crude oil. An energy unit by weight is also used – this is called Ton of Oil Equivalent (TOE).

1-1-2 What is Natural Gas?

Natural gas is a combustible mixture of small-molecule hydrocarbons. These are made of atoms of carbon and hydrogen. For example, natural gas used in the home is mainly methane, which is a molecule made up of one carbon atom and four hydrogen atoms, and is referred to as CH₄.

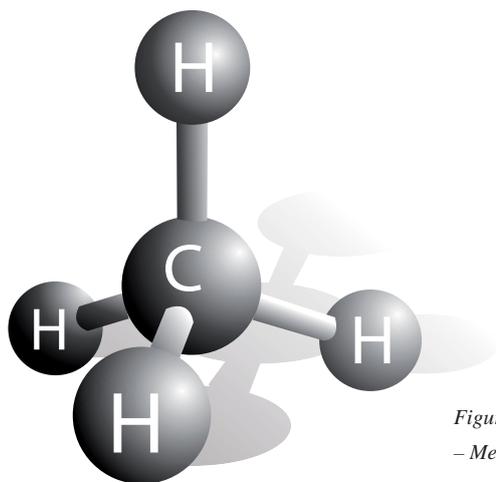


Figure 1.1
– Methane molecule

While natural gas is formed primarily of methane, it can also include ethane, propane and butane. The composition of natural gas can vary widely. Table 1.2 outlines the typical makeup of natural gas before it is refined.

No mixture can be referred to as natural gas as each gas stream has its own composition. Even two gas wells from the same reservoir may have different constituents.

Natural gas in its purest form, such as the natural gas that is delivered to your home, is almost pure methane. It is considered ‘dry’ when it is almost pure methane, having had most of the other commonly associated hydrocarbons removed. When other hydrocarbons are present, natural gas is ‘wet’.

Typical Composition of Natural Gas		
Methane	CH ₄	70-90%
Ethane	C ₂ H ₆	
Propane	C ₃ H ₈	0-20%
Butane	C ₄ H ₁₀	
Carbon Dioxide	CO ₂	0-8%
Oxygen	O ₂	0-0.2%
Nitrogen	N ₂	0-5%
Hydrogen sulphide	H ₂ S	0-5%
Rare gases	A, He, Ne, Xe	trace

Table 1.2 - Typical contents of natural gas.

Natural gas is a vital component of the world’s supply of energy. It is one of the cleanest, safest, and most useful of all energy sources.

While commonly grouped with other fossil fuels and sources of energy, many characteristics of natural gas make it unique.

In itself, it might be considered uninteresting - it is colorless, shapeless, and odourless in its pure form. Uninteresting - except that natural gas is combustible, and when it is burned it gives off a great deal of energy and, unlike other fossil fuels, is clean emitting lower levels of potentially harmful by-products into the air. We require energy constantly, to heat our homes, cook our food, and generate our electricity. This need for energy has given natural gas its importance in our society and in our lives.

Natural gas has many uses, residentially, commercially, and industrially. Found in reservoirs underneath the earth, natural gas is commonly associated with oil deposits. Production companies search for evidence of these reservoirs using sophisticated technology that helps to locate natural gas and drill wells in the earth at possible sites.

Natural gas can be measured in a number of different ways. Measured at normal temperatures and pressures the volume is expressed in normal cubic feet (Ncf or Nf³) or normal cubic metres (Nm³). Normal denotes a temperature of 0°C and a pressure of 1 atm. 1 ft³ is equal to 0.0283 Nm³. Production and distribution companies commonly measure natural gas in thousands of cubic feet (Mcf), millions of cubic feet (MMcf), or trillions of cubic feet (Tcf). While measuring by volume is useful, natural gas can also be measured by its calorific content. The energy oil units BOE and TOE can also be used for gas and denotes the amount of gas corresponding to one BOE or one TOE. One Bbl of crude oil corresponds to approx. six Mcf of natural gas.

1-2 Formation of Oil and Gas

1-2-1 How are Oil and Gas formed?

Crude oil was generated over millions of years from the remains of tiny plants and animals that became incorporated into muddy sediments. Subsequent deposition of sediment caused the organic-rich “source rock” layer to be buried ever deeper and exposed to increasing temperatures. With increasing temperature first heavy then light oil was formed from the organic material, and finally gas.

Organic material deposited in sediments during the Jurassic and Cretaceous geological ages 180 to 65 million years ago (the time of the dinosaurs) generated most of the oil we find in the North Sea today.

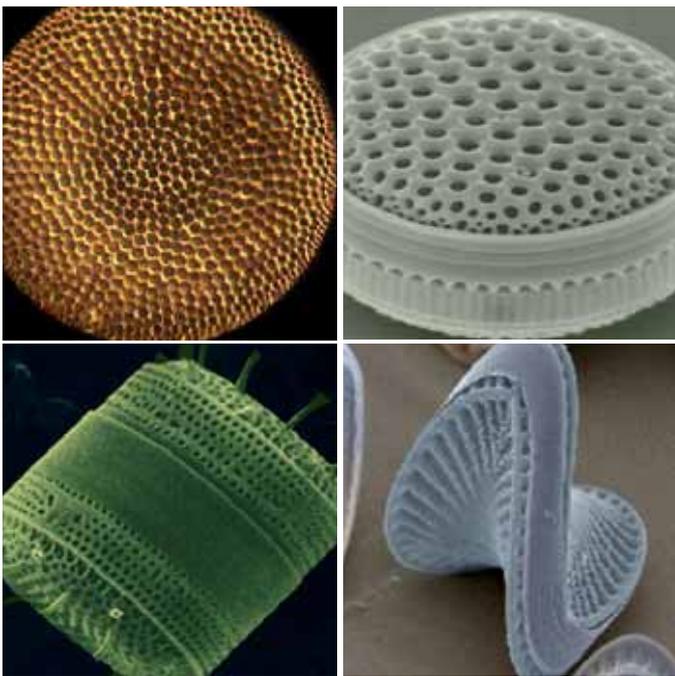


Figure 1.2 – Diatoms - examples of plankton types.

There are three essential elements in the creation of a crude oil and gas field

- 1) *The existence of a “source rock” - The geologic history of such a rock enabled the formation of crude oil. This usually is fine-grained shale, rich in organic matter.*
- 2) *The generated oil or gas move (“migrate”) into a permeable layer called a reservoir. Reservoirs typically consist of sandstones and limestones. Once inside the reservoir buoyancy will move the oil*

and gas upwards. The oldest oil-bearing rocks date back more than 600 million years; the youngest, about 1 million, most oil fields have been found in rocks between 10 million and 270 million years old (In Denmark typically it is 65+ million years old).

- 3) *A “trap” is required to capture the oil or gas. The trap prevents the oil from escaping the reservoir by way of its shape and organization of rock types. Usually it involves a non-permeable layer on top that acts as a seal. Traps are generally formed by tectonic forces that either breaks the continuity of the reservoir (“fault”) or buckles it (“fold”), but there are many different types of traps. See figure 1.3*

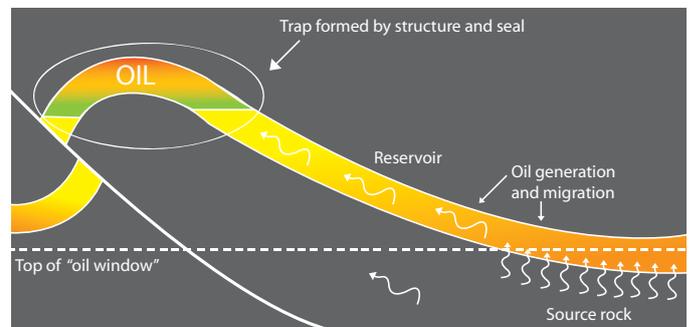


Fig 1.3 Trap.

The oldest oil-bearing rocks date back more than 600 million years - the most recent, about 1 million years. Most oil fields have been found in rocks that are between 10 and 270 million years old. Most Danish oil fields are about 60 million years old.

Subsurface temperature, which increases with depth, is a critical factor in the creation of oil. Petroleum hydrocarbons are rarely formed at temperatures less than 65°C and are generally carbonized and destroyed at temperatures greater than 260°C. Most hydrocarbons are found at “moderate” temperatures ranging from 105° to 175°C.

1.2.2 The origins Oil and Natural Gas?

The burning of oil and gas will generate energy which is transferred from the chemicals to the surroundings. The original source of this energy is the sun. Plants use the sun’s energy to produce sugars and oxygen from carbon dioxide and water, a process called photosynthesis,



where $\text{C}_6\text{H}_{12}\text{O}_6$ is glucose. The reaction needs light to produce glucose. Oxygen is a by-product of the process.

Basic Information about Oil and Gas

This energy is stored in the chemicals which the plants produce. Animals eat the plants and energy is transferred to their bodies. On earth, millions of years ago, plants and animals decayed, and the organic chemicals, of which their bodies were made, became the source of fossil fuels we use today.

Formation of oil

Some scientists believe that when these animals and plants died and sank to the bottom of seas and lagoons, layers of sediment covered them. Then anaerobic bacteria (a bacteria that does not require oxygen to growth), before aerobic (a bacteria that has an oxygen based metabolism) decomposition could start, are thought to have acted on them and started the process of transforming them into crude oil or gas. As the remains of these living organisms decayed, they were covered by more and more sediment as seas advanced and retreated, and rivers washed mud and sand into the sea.

Eventually, the rotting material, mixed with grains of sand and silt, began to change into the hydrocarbons, which make up oil and gas.

As the layers on top of the organic chemicals increased, so did the pressure and temperature, and this helped speed up the process.

Other scientists think that chemical reactions took place between the decaying organisms and the salts in the mud and water surrounding them. As we know, there is a difference in the chemical composition of oil from different parts of the world. The way oil was formed and the types of plants and animals, from which it was formed, seem to determine this. Whatever theory one subscribes to the process it is a very slow one stretching over millions of years.

It is important to realize that these hydrocarbons did not form ‘pools’ of oil underground. They were mixed with water and sand, which gradually seeped through the porous layers of sandstone or limestone

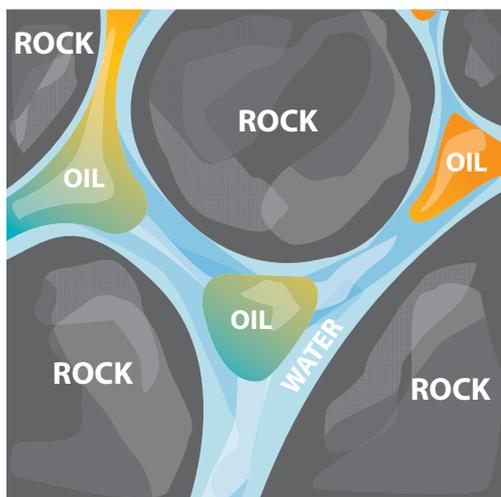


Figure 1.4
– Porosity.

along with bubbles of gas. Often, pressure helped to force the mixture between the rocks, which was contained between the particles of these sedimentary rocks, like water in a sponge. Eventually, the oil and gas reached a layer of impervious or non-porous rock they could not pass through and thus were trapped.

Formation of natural gas

There are many different theories as to the origins of fossil fuels. Natural gas is a fossil fuel. Like oil and coal, this means that it is, essentially, the remains of plants, animals, and micro-organisms that lived millions of years ago. However, how do these once living organisms become an inanimate mixture of gases?

The most widely accepted theory says that fossil fuels are formed when organic matter is compressed under the earth, at very high pressure for a very long time. When applied to natural gas this is referred to as thermogenic methane. Similar to the formation of oil, thermogenic methane is formed from organic particles that are covered in mud and other sediment. Over time, more and more sediment, mud and other debris are piled on top of the organic matter, which puts a great deal of pressure on the organic matter and compresses it. This compression, combined with high temperatures found deep underneath the earth, breaks down the carbon bonds in the organic matter.

As one goes deeper under the earth’s crust, the temperature gets higher and higher. At low temperatures (shallower deposits), more oil is produced relative to natural gas. At higher temperatures, however, the opposite occurs, and more natural gas is formed in relation to oil. That is why natural gas is usually associated with oil in deposits that are 1.5 to 3 km below the earth’s crust. Deeper deposits, very far underground, usually contain primarily natural gas, in many cases, pure methane.

Natural gas can also be formed through the transformation of organic matter by tiny microorganisms. This type of methane is referred to as biogenic methane. Methanogens, tiny methane producing anaerobic micro-organisms, break down organic matter chemically to produce methane. These microorganisms are commonly found in areas near the surface of the earth that are devoid of oxygen. These micro-organisms also live in the intestines of most animals, including humans producing flatulence.

Formation of methane in this manner usually takes place close to the surface of the earth, and the methane produced is usually lost to the atmosphere. In certain circumstances, however, this methane can be trapped underground and recovered as natural gas.

A third way, in which methane may be formed, is through a biogenic process (a non-biological process, where oxygen is not involved).

Deep under the earth's crust, hydrogen-rich gases and carbon molecules are found. As these gases gradually rise towards the surface of the earth, they may, in the absence of oxygen, interact with minerals that also exist underground. This interaction may result in the formation of gaseous elements and compounds that are found in the atmosphere (including nitrogen, oxygen, carbon dioxide, argon, and water).

If these gases are under very high pressure, as they move towards the surface of the earth, they are likely to form methane deposits, similar to thermogenic methane.

1-2-3 Natural Gas under the Earth

Although there are several ways that methane, and thus natural gas, may be formed, it is usually found underneath the surface of the earth. As natural gas has a low density once formed, it will rise towards the surface of the earth through loose, shale type rock and other material. Most of this methane will simply rise to the surface and disappear into the air. However, a great deal of this methane will move upwards into geological formations that 'trap' the gas underground. These formations are made up of layers of porous sedimentary rock - like a sponge - that soaks up and contains the gas. An impermeable layer of rock covers the sedimentary rock and traps the natural gas under the ground. If these formations are large enough, they can trap a great deal of natural gas, in what is known as a reservoir. There are a number of different types of these formations, but the most common one is created when the impermeable sedimentary rock forms a 'dome' shape, like an umbrella that catches all the natural gas that floats to the surface. There are a number of ways that this sort of 'dome' may be formed. Most commonly, faults are a common location for oil and natural gas deposits. A fault occurs when the normal sedimentary layers 'split' vertically, so that impermeable rock shifts down to trap natural gas in the more permeable limestone or sandstone layers. Essentially, the geological formation, which layers impermeable rock over more porous oil and gas-rich sediment, has the potential to form a reservoir.

To bring these fossil fuels successfully to the surface, a hole must be drilled through the impermeable rock to release the fossil fuels under pressure. Note that in reservoirs that contain oil and gas, gas, being the least dense, is found closest to the surface, with oil beneath it. Typically, a certain amount of water is found furthest from the surface beneath the oil.

Natural gas trapped under the earth in this fashion can be recovered by drilling a hole through the impermeable rock. Gas in these reservoirs is typically under pressure, which allows it to escape on its own.

1-2-4 Migration of Oil and Gas

As the source rocks become buried under more sediment, the pressure rises and the hydrocarbons are very slowly squeezed from the source rocks into neighboring porous rocks, such as sandstones. This process is called expulsion. Originally the pores within the neighboring rocks were filled with water. The oil and gas now entering these rocks are less dense than water and as a result are expelled from the pores and float upwards through the water held within the porous rocks. The hydrocarbons move very slowly, from where they were originally generated. This movement can take place over many km vertically and many tens, or even hundreds of km laterally. This process is called migration.

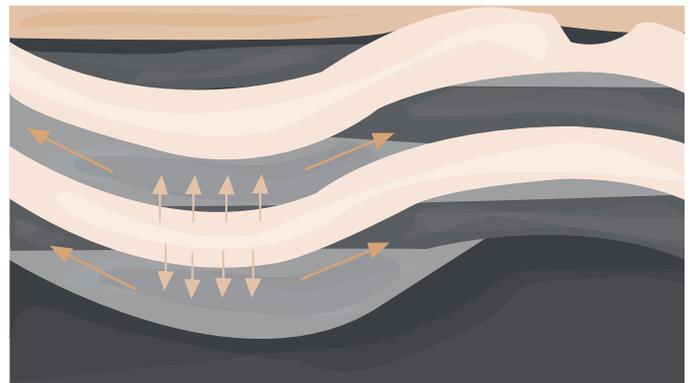


Figure 1.4 – Migration. Movement of hydrocarbons in the porous rock.

Hydrocarbons are known to be able to migrate several km. One example is the Danish fields Siri, Nini and Cecilie. As with all other Danish oil and gas fields, the hydrocarbons in these fields were formed in the Central Graben. However, as a result of migration, the hydrocarbons are today extracted from reservoirs 50-60 km away from the Central Graben.

Eventually impervious rocks can stop the migration of the hydrocarbons, through which they cannot move, the pore spaces between the grains of the rocks being too small. These impermeable rocks are called seals. Examples include mud and shales. Slowly the hydrocarbons accumulate in the porous rock at the point where their upward movement is stopped. The structure in which the hydrocarbons accumulate is called a trap, and the porous rock in which the hydrocarbons are trapped is called a reservoir. It must be stressed that these reservoirs are not huge subterranean lakes of oil, but areas of porous rocks holding the oil or gas within their pores as in a sponge.

Reservoirs can contain any combination of oil and gas: oil with no gas, gas with no oil or both gas and oil together. Because gas is less dense than oil, it rises to the top of the reservoir, while oil, being the

Basic Information about Oil and Gas

heavier, remains at the base. When discovered, and once an estimate has been made of the size and value of the trapped hydrocarbons, the accumulation is usually called a field.

The crude oils and natural gases within each field are unique. Some crude oils are black, heavy and thick like tar, while others are pale and flow very much like water. Natural gases also vary a lot. Some are almost identical to those we burn in our central heating boilers or cookers. Others are higher energy gases, which we use as building blocks for petrochemical products.

Of the hydrocarbons that are formed in the source rock, only a small percentage is trapped. Most seep away and may sometimes form oil seepages with thick black pools or tarry deposits on the surface of the land or on the seabed. These seepages are important indicators of the presence of subsurface hydrocarbons and can help geologists in their search for previously undiscovered oil and gas fields.

Natural gas is normally found in the same reservoirs as crude oil and today, because the world's demand for natural gas is growing faster than that for oil, energy companies are extremely eager to find and develop gas fields wherever they can be profitably exploited and marketed.

1-3 Oil and Gas Characteristics

1-3-1 Chemical Composition of Oil

Crude oils and refined petroleum products consist largely of hydrocarbons, which are chemicals composed solely of hydrogen and carbon in various molecular arrangements. Crude oils contain hundreds of different hydrocarbons as well as inorganic substances including sulphur, nitrogen, and oxygen, as well as metals such as iron, vanadium, nickel, and chromium. Collectively, these other atoms are called heteroatoms.

Certain heavy crude oils from more recent geologic formations contain less than 50% hydrocarbons and a higher proportion of organic and inorganic substances containing heteroatoms. The refining process removes many of the chemicals containing these. All crudes contain lighter fractions similar to petrol as well as heavier tar or wax constituents, and may vary in consistency from a light volatile fluid to a semi-solid.

Petroleum products used for engine fuels are essentially a complex mixture of hydrocarbons. Petrol is a mixture of hydrocarbons that contain 4 to 12 carbon atoms and have boiling points between 30° and 210°C. Kerosenes used for jet fuel contain hydrocarbons with 10 to 16 carbon atoms and have boiling points between 150° and 240°C. Diesel fuels and the low-grade heavy bunkering fuels contain hydrocarbons with higher numbers of carbon atoms and higher boiling points. In addition, diesel fuels and bunkering fuels have greater proportions of compounds containing heteroatoms.

The major classes of hydrocarbons in crude oils are shown in figure 1.5 together with their characteristics.

Table 1.5 – Typical elementary composition of crude oil.

Element	Examples	Weight %
Carbon (C)	Hydrocarbons	84
Hydrogen (H)	Hydrocarbons	14
Sulfur (S)	Hydrogen sulfide, sulfides, disulfides, elemental sulfur	1 to 3
Nitrogen (N)	Basic compounds with amine groups	Less than 1
Oxygen (O)	Found in organic compounds such as carbon dioxide, phenols, ketones, carboxylic acids	Less than 1
Metals	Nickel, iron, vanadium, copper, arsenic	Less than 1
Salts	Sodium chloride, magnesium chloride, calcium chloride	Less than 1

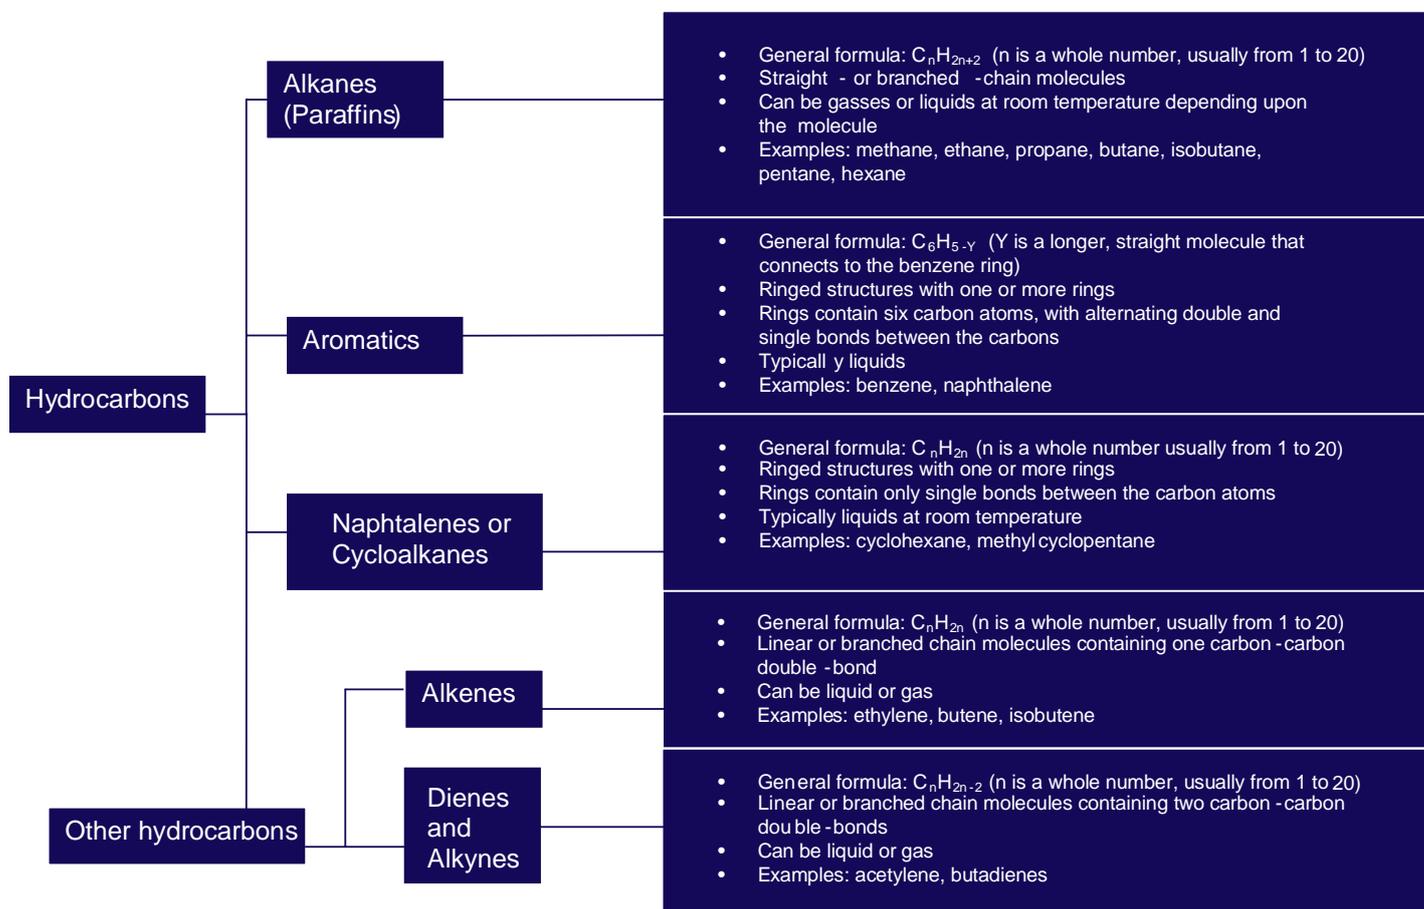


Figure 1.6 - The major classes of hydrocarbons in crude oil.

1-3-2 Main Constituents of Natural Gas

The hydrocarbons normally found in natural gas are methane, ethane, propane, butanes, pentanes as well as small amounts of hexanes, heptanes, octanes, and heavier gases. Normally straight chain hydrocarbon gases are present in natural gas. However, cyclic and aromatic hydrocarbon gases are also occasionally found in them.

1-3-3 Other Constituents of Natural Gas (Impurities)

In addition to hydrocarbons, natural gas commonly contains appreciable amounts of other compounds/gases called impurities. These non-hydrocarbon gases/compounds are:

Impurities also include heavier hydrocarbons i.e. pentane plus. Such components usually have a deleterious effect on the properties and performance of natural gas and make handling and processing difficult. Therefore, they must be removed or converted into less harmful compounds.

Some components like H_2S , H_2O , nitrogen, helium, pentanes and heavier hydrocarbons may cause extremely unreliable and hazardous combustion conditions for the consumer. Of course, they must also be removed converted into less harmful compounds.

Gas	Chemical formula	Boiling point at normal pressure (°C)
Methane	CH ₄	-164,0
Ethane	C ₂ H ₆	-89,0
Propane	C ₃ H ₈	-42,0
Butane	C ₄ H ₁₀	-0,5
Pentane	C ₅ H ₁₂	36,0
Hexane	C ₆ H ₁₄	69,0
Heptane	C ₇ H ₁₆	98,4
Octane	C ₈ H ₁₈	125,0

Table 1.7 - Hydrocarbons normally found in natural gas.

Gas	Chemical formula	Boiling point at normal pressure (°C)
Nitrogen	N ₂	-196,0
Carbon dioxide	CO ₂	-78,5
Hydrogen sulphide	H ₂ S	60,0
Helium	He	-269,0
Water (vapour)	H ₂ O	100,0
Carbonyl sulphide	COS	-50,0
Carbon disulphide	CS ₂	46,2
Sulphur	S	444,6
Oxygen	O ₂	-183,0

Table 1.8 - Non-hydrocarbon gases in natural gas.

Basic Information about Oil and Gas

1-3-4 Types of Natural Gas

So far, we have looked at the composition and components of raw gas as it flows from the reservoir to the refining plant. The finished product or sales gas, however, is a mixture only of methane and ethane.

Some definitions of different gases are:

- Dry Natural Gas: Gas which contains less than 0.1 usg/mcf (USA gallon/million cubic feet) of C₅.
- Wet Natural Gas: Gas which contains greater than 0.1 usg/mcf of C₅.
- Rich Gas: Gas which contains greater than 0.7 usg/mcf of C₃+
- Lean Gas: Gas which contains less than 0.7 usg/mcf of C₃ +.
- Sour Gas: Gas which contains H₂S and /or CO₂.
- Sweet Gas: Gas which contains no H₂S and or / CO₂.
- Sales Gas: It is domestic/industrial or pipeline gas which mainly consists of methane and ethane.
- Condensate: It contains pentanes and Heavier (C₅ +) hydrocarbons.
- Natural Gasoline: A specification product of set vapor pressure.
- Well Effluent: Untreated fluid from reservoir.
- Raw Gas: Raw plant feed as it enters the plant.

1-4 Oil and Gas Reserves

1-4-1 Oil Production & Consumption

Oil reserves refer to portions of oil in a place that are recoverable, certain economic constraints taken into consideration.

Between 1859 and 1968, a total of 32 billion m³ of oil were used. The top 20 nations sorted by production, and their production and consumption figures to be seen in figure 1.7. Source: The CIA World Factbook. Saudi Arabia produces the most at 8,711,000.00 bbl per day, and the United States consumes the most at 19,650,000.00 bbl per day, a full 25% of the world's oil consumption.

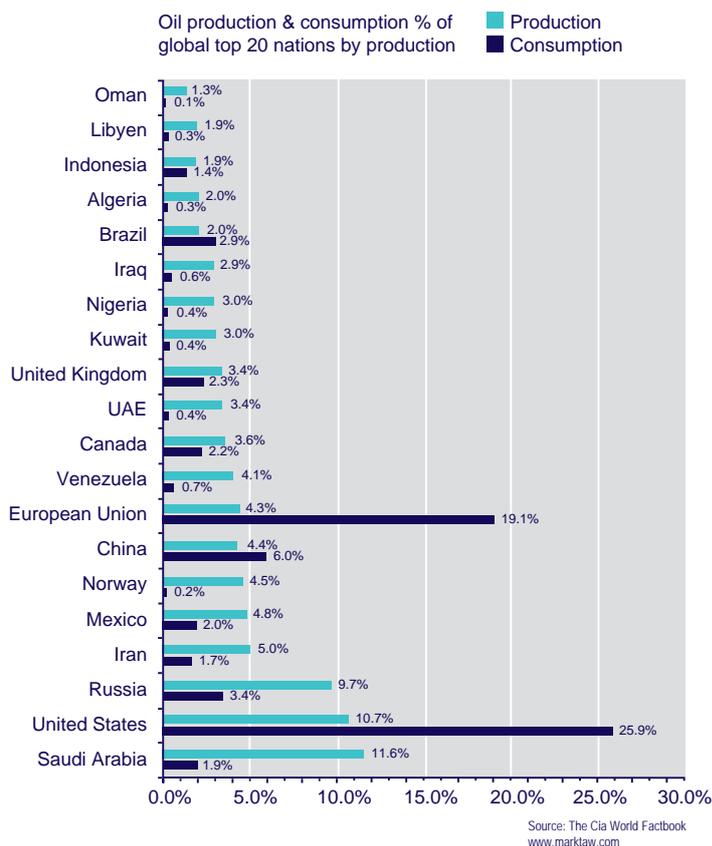


Figure 1.7 Oil Production & Consumption Global.

As the price of oil increases, a vast number of oil-derived products are becoming more expensive to produce, including petrol, lubricating oils, plastics, tires, roads, synthetic textiles, etc. The increased oil prices and the amounts of oil reserves left on earth have encouraged researchers to develop new alternatives to these petroleum-based products. Oil reserves are primarily a measure of geological risk of the prob-

Basic Information about Oil and Gas

ability of oil existing and being producible under current economic conditions, using current technology. The 3 categories of reserves generally used are:

- Proven
- Probable
- Possible reserves

1-4-2 World Oil Reserves

Oil reserves are the quantities of crude oil estimated to be commercially recoverable by application of development projects to known accumulations from a given date forward under defined conditions. To qualify as a reserve, they must be discovered, commercially recoverable, and still remaining. Reserves are further categorized by the level of certainty associated with the estimates. This is contrasted with contingent resources which are those quantities of petroleum estimated, as of a given date, to be potentially recoverable from known accumulations, but the applied project(s) are not yet considered mature enough for commercial development because of one or more contingencies.

The total estimated amount of oil in an oil reservoir, including both producible and non-producible oil, is called oil in place. However, because of reservoir characteristics and limitations in petroleum extraction technologies, only a fraction of this oil can be brought to the surface, and it is only this producible fraction that is considered to be reserves. The ratio of producible oil reserves to total oil in place for a given field is often referred to as the recovery factor. Recovery factors vary greatly among oil fields. The recovery factor of any particular field may change over time based on operating history and in response to changes in technology and economics. The recovery factor may also rise over time if additional investment is made in enhanced oil recovery techniques such as gas injection, water-flooding, or microbial enhanced oil recovery. See figure 1.8.

As the geology of the subsurface cannot be examined direct, indirect techniques must be used to estimate the size and recoverability of the resource. While new technologies have increased the accuracy of these techniques, significant uncertainties still remain. In general, most early estimates of the reserves of an oil field are conservative and tend to grow with time. This phenomenon is called reserves growth.

Many oil producing nations do not reveal their reservoir engineering field data, and instead provide unaudited claims for their oil reserves. The numbers disclosed by some national governments are suspected of being manipulated for political reasons.

Top 20 Nations by oil reserves (% of global)

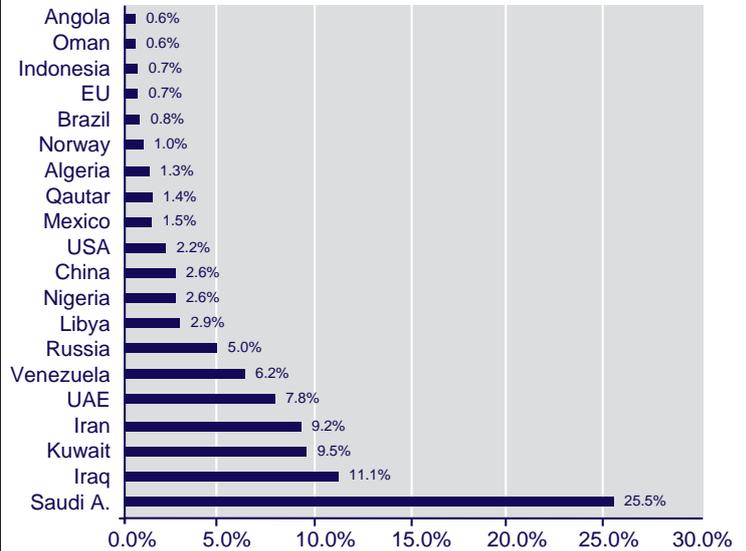


Figure 1.8 Global Oil Reserves.

1-4-3 North Sea Oil

With 7,000 km of coast line, the ocean has always played an important role also for Denmark. Since the age of the Vikings, the Danes have taken advantage of the ocean, and Denmark has shown the way for the offshore industry.

Significant North Sea oil and natural gas reserves were discovered in the 1960s. The earliest find of oil in the North Sea was made 40 years ago when Dansk Undergrunds Consortium (DUC) led by Maersk Oil drilled their first exploration well. Oil production from the Danish North Sea was started in 1972, and since then Danish offshore oil and gas activities have increased steadily. Today, Denmark is an oil exporting country, producing roughly twice the amount of oil it is using.

A solid build-up of world-class Danish knowledge has taken place in parallel with exploration over the past decades, with a focus on keeping overall cost of oil production at a minimum for marginal oil fields, while at the same time keeping a focus on health, safety, environment and quality.

Today, also the UK and Norway are substantial oil producers. However, the North Sea did not emerge as a key, non-OPEC oil producing area until the 1980s and 1990s, when major projects came into operation. Oil and natural gas extraction in the North Sea's inhospitable climate and great depths requires sophisticated offshore technology. Consequently, the region is a relatively high-cost producer, but its political stability and proximity to major European consumer markets have allowed it to play a major role on world oil and natural gas markets.

Basic Information about Oil and Gas

Together with Norway Denmark is unique in the North Sea, and as the only oil exporting countries in all of Europe, Denmark is actually exporting more oil than it is consuming. The North Sea will continue to be a sizable crude oil producer for many years to come, although

output from its largest producers - the UK and Norway - has essentially reached a plateau and is projected to begin a long-term decline. In the near future, improved oil recovery technologies, continued high oil prices and new projects coming online is expected to delay substantial declines in output. Discoveries of new sizable volumes of oil will be welcome in the future, to delay or even revert a downward trend in oil production.

With regards to natural gas, the North Sea is seen as a mature region. However, Norway and Holland have seen an increase in natural gas production in recent years, while the UK is likely to become a net gas importer in the near future. The importance of the North Sea as a key supplier of natural gas will continue as consumption in Europe is predicted to increase significantly in the future.

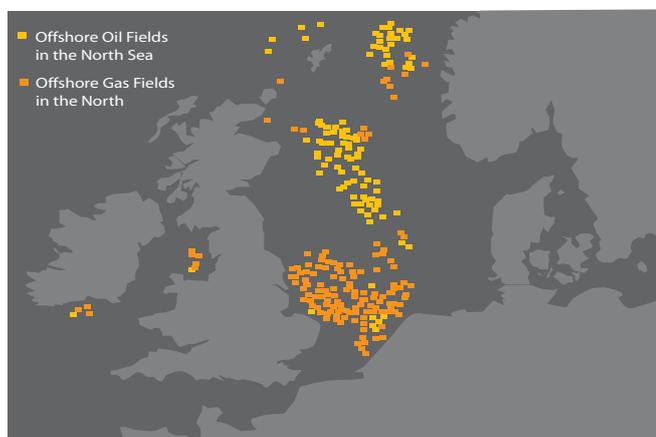


Figure 1.9. Offshore Oil and gas fields in the North Sea

1-4-3-1 North Sea Oil Licensing

5 countries operate with North Sea production. The 5 countries operate a tax and Royalty licensing regime. Median lines agreed in the late 1960s divide the respective sectors:

- **Denmark:** - The Danish sector is administered by the Danish Energy Authority. Sectors are divided into 1-degree-by-1-degree quadrants, blocks 10 minutes latitude by 15 minutes longitude. Part blocks exist where partial relinquishments have taken place
- **United Kingdom:** - Licenses are administered by the DTI (Department of Trade and Industry). The UKCS (United Kingdom Continnence Society) is divided into quadrants of 1-degree latitude

by 1-degree longitude. Each quad consists of 30 blocks measuring 10 minutes of latitude by 12 minutes of longitude each. Some blocks are divided further into part blocks where relinquishments by previous licensees have taken place. For example, block 13/24a is the 24th block in quad 13, and is a part block. The UK government has traditionally issued licenses via periodic (now annual) licensing rounds. The participants are awarded blocks based on their work-program bid. The UK DTI has been very active in attracting new entrants to the UKCS via Promote licensing rounds and the fallow acreage initiative where non-active licenses have had to be relinquished.

- **Norway** - licenses are administered by the NPD (Norwegian Petroleum Directorate). The NCS (Norwegian Continental Shelf) is also divided into quads of 1-degree by 1-degree. Norwegian license blocks are larger than British blocks, being 15 minutes latitude by 20 minutes longitude (12 blocks per quad). Like Britain there are numerous part blocks formed by relicensing relinquished acreage.
- **Germany** - Germany and the Netherlands share a quadrant and block grid - quadrants are given letters rather than numbers. The blocks are 10 minutes latitude by 20 minutes longitude. Germany has the smallest sector in the North Sea.
- **Netherlands** - The Dutch sector is located in the Southern Gas Basin and shares a grid pattern with Germany.

1-4-3-2 Reserves and Production in the North Sea

The North Sea contains the majority of Europe's oil reserves and is one of the largest non-OPEC producing regions in the world. While most reserves belong to the United Kingdom, Norway and Denmark, some fields belong to the Netherlands and Germany.

Most oil companies in Europe have investments in the North Sea. At its peak in 1999, production of North Sea oil was nearly 950,000 m³ per day, while natural gas production was nearly 280 million m³ in 2001 and continues to increase.

Brent crude (one of the earliest crude oils produced in the North Sea) is still used today as a standard reference for pricing oil.

1-4-3-3 Future Production

Since the 1970s North Sea oil has not only been a major source of wealth for the economies of the major producers in the North Sea (Norway, UK and Denmark), but has also been a way for Europe to cut its dependence on Middle East oil. With severe wind gusts and waves 30 m high, the North Sea has been one of the most challenging areas for oil exploration and recovery. Hence a huge pool of experience has been accumulated in the region over the past 30 years and the North Sea has been a key component of the increase in non-OPEC oil production over the past 20 years.

Basic Information about Oil and Gas

Much of this experience gained on the North Sea by Danish operators and suppliers during these severe conditions and with recovery in oil fields using groundbreaking horizontal drilling techniques in marginal fields can be used all over the world. Hence a huge export window has opened to the Danish offshore industry.

While primary oil demand in the European Union (EU) is projected to increase by 0.4% per year from now to 2030, North Sea output peaked in 1999 and has been on the decline ever since.

Many efforts are being made to arrest the decline by developing small marginal fields and introducing sophisticated exploration and drilling techniques. These efforts extend the life of the regional fields by additional years. However, according to the World Energy Outlook of the International Energy Agency, EU oil production, most of it from the North Sea, is projected to fall in the following years, forcing the EU to increase its dependency on imported oil, primarily from the Middle East.

The swing from net exports to net imports is likely to harm the European economies producing oil and gas, particularly those of Britain, Norway and Denmark, but also the rest of Europe, unless major research and development steps towards increased oil recovery are made in the coming years.

1.4.4 World Gas Reserves

The world's total gas reserves are estimated to 187.49 cubic meters (British Petroleum Statistical Review Energy 2010), the reserves distribute as follows:

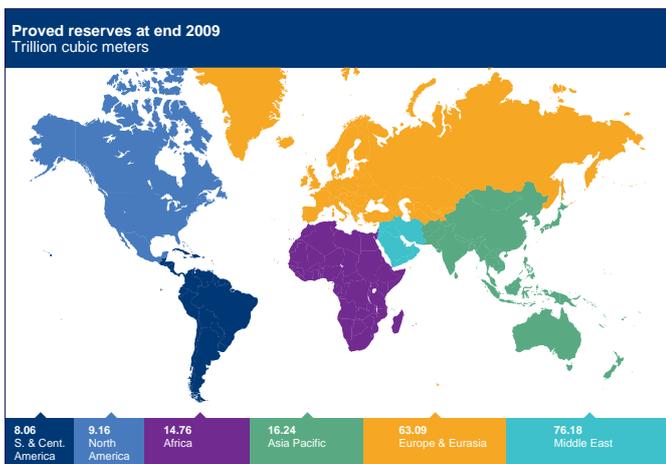


Figure 1.10 World natural gas reserves by geographic regions as of January 1, 2009

The total world consumption of dry natural gas for the years 1984 to 2009 can be seen in figure 1.10 (British Petroleum Statistical Review Energy 2010).

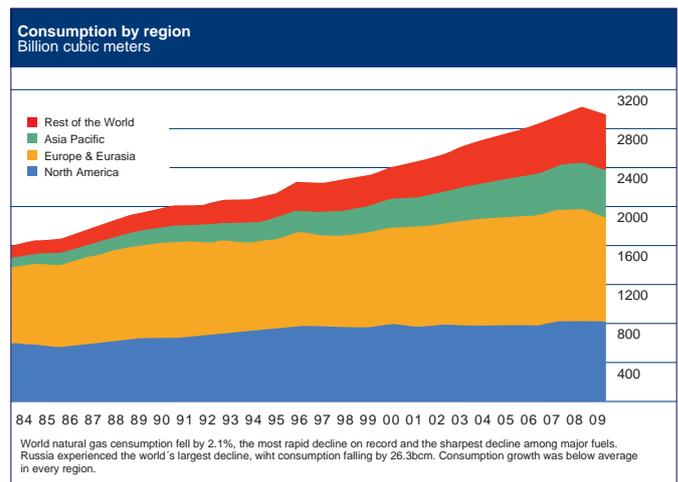


Figure 1.11 - world gas consumption per year in the year 1980 to 2009

1.4.5 North Sea Gas


In relation to natural gas, the North Sea is also seen as a mature region. Only Norway and the Netherlands have seen an increase in natural gas production in recent years, while the UK is becoming a net gas importer. Nevertheless, the North Sea's importance as a key supplier of natural gas will continue, as natural gas consumption in Europe will increase significantly in the future. Imports from outside sources, such as Africa, the Middle East and Russia, will also have to increase in order to compensate for the North Sea decline in production.

The North Sea region is the second-largest supplier of natural gas to continental Europe, after Russia. According to Oil & Gas Journal, the five countries in the North Sea region had combined, proven natural gas reserves of 5,006 billion m³. Two countries, Norway and the Netherlands, account for over three-fourths of these reserves, while the UK is currently the largest producer. The North Sea region is an important source of natural gas for Europe, second only to Russia in total supply sent to the European Union (EU).

The UK is the largest producer of natural gas in the North Sea. In its sector, the most important production center is the Shearwater-Elgin area, which contains five large fields (Elgin, Franklin, Halley, Scoter, and Shearwater). The second largest producer in the North Sea region is the Netherlands. However, most of that country's natural gas production comes from the giant onshore Groningen field, which represents about one-half of total national production. The bulk of

Norway's natural gas reserves are located in the North Sea, but there are also significant reserves in the Norwegian and Barents Sea areas. In 2008, Norway produced 99.2 billion m³ of natural gas, making it the eighth-largest producer in the world; however, due to the country's low domestic consumption, Norway is the third-largest natural gas exporter in the world, behind Canada and Russia. A small group of fields account for the bulk of Norway's natural gas production: 4 fields (Troll, Sleipner Ost, Asgard, and Oseberg) comprise over 70% of Norway's total natural gas production.

Denmark's natural gas production reached 9.8 billion m³ in 2008, making also Denmark a net-exporter of gas. According to the Danish Energy Authority, more than one-quarter of production is re-injected to boost oil production.

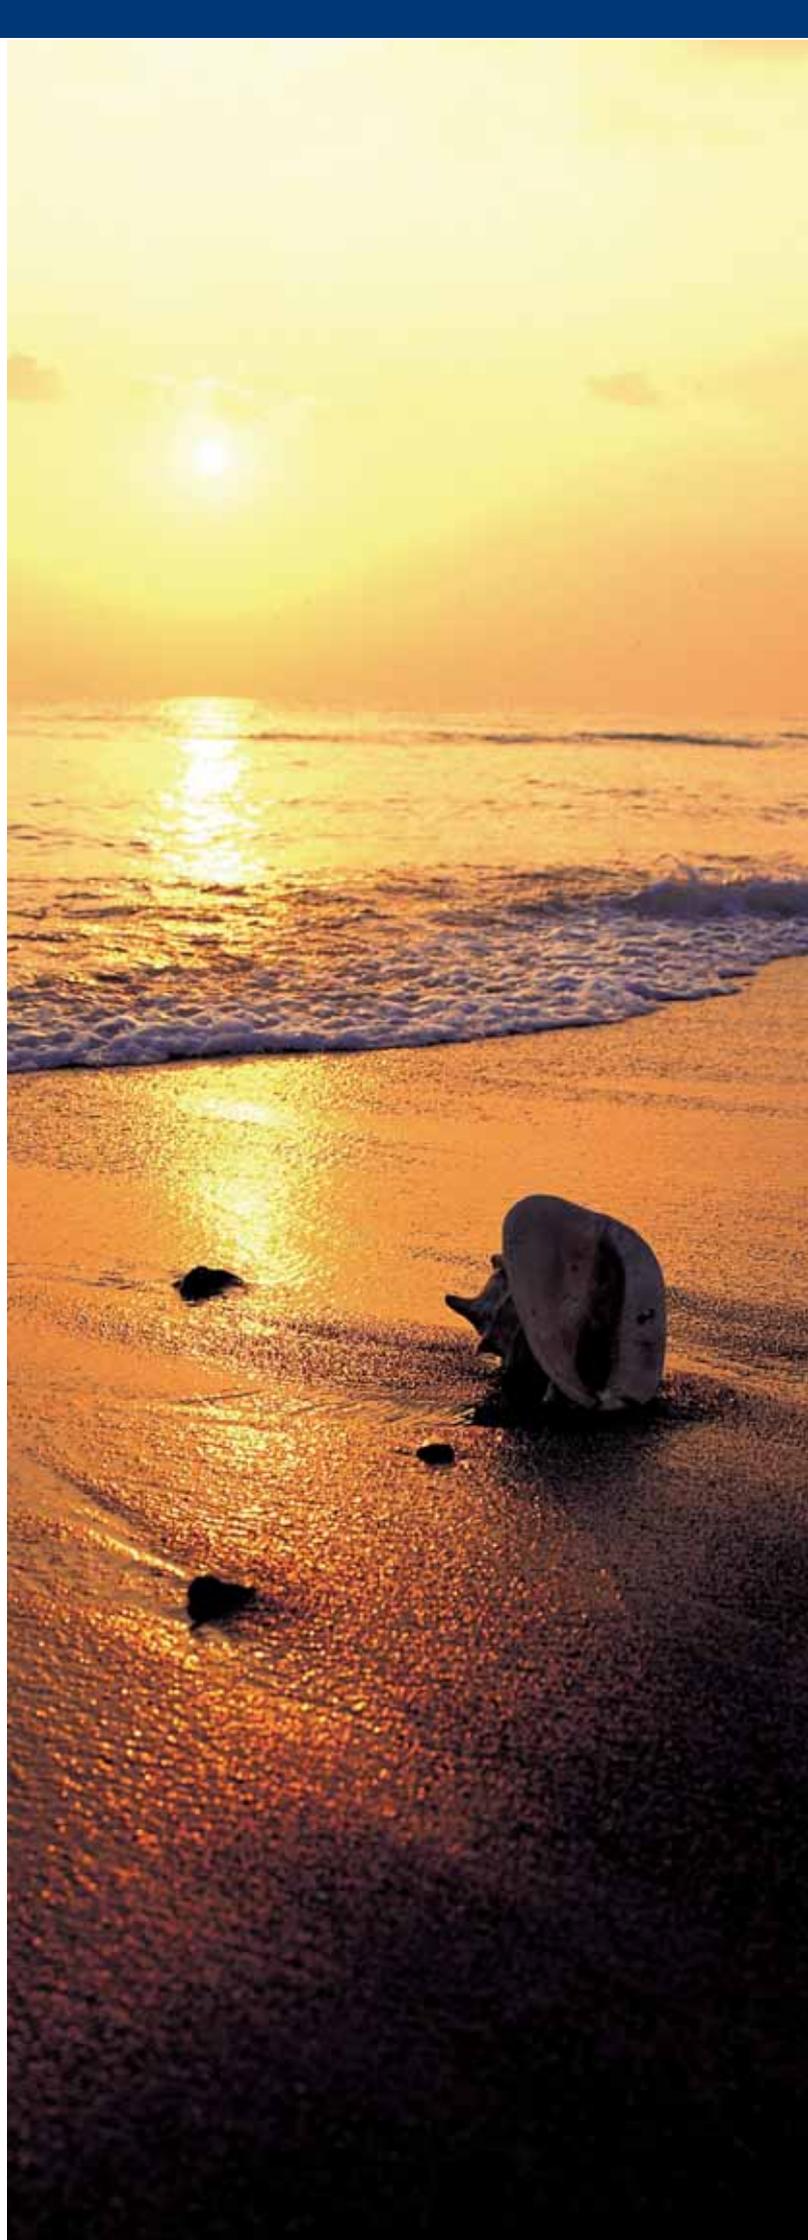

Chapter 2

Reservoir - Geology and Exploration

2-1 What is an Oil and Natural Gas Reservoir?

An oil reservoir or petroleum reservoir is often thought of as being an underground “lake” of oil, but is actually composed of hydrocarbons contained in porous rock formations.

Millions of years ago oil and natural gas were formed from the fossil organic material that settled on the seabed along with sand, silt and rocks. As they settled, layer upon layer accumulated in rivers, along coastlines, and on the bottom of the sea.

Geological shifts resulted in some of these layers being buried deep in the earth. Over time, layers of organic material were compressed by the weight of the sediments above them, and the increasing pressure and temperature transformed the mud, sand, and silt into rock, the organic matter into petroleum. The rock containing organic matter is referred to as the source rock.

Over millions of years the oil and gas, which were formed, migrated upwards through tiny, connected pore spaces in the rocks. A certain quantity seeped out onto the surface of the earth. But most of the petroleum was trapped by non-porous rocks or other barriers that would not allow it to migrate further. These underground oil and gas traps are called reservoirs and are not underground “lakes” of oil, but porous and permeable rocks that can hold significant amounts of oil and gas within their pore spaces. This allows oil and natural gas within them to flow through to a producing well.

Some reservoirs may be only hundreds of meters below the surface of the earth; others are thousands, sometimes tens of thousands of meters underground. Reservoirs in the North Sea are typically found 2-3 km under the seabed.

Most reservoirs contain oil, gas, and water. Gravity acts on these fluids and separates them according to their density, with gas on top, then oil, and finally water. However, other parameters, such as fluid/rock properties and solubility can restrict complete gravitational separation. When a well produces fluids from a subsurface reservoir, typically oil and water, and often some gas will be recovered.

The larger subsurface traps are the easiest oil and gas deposits to locate. In mature production areas of the world, most of these large deposits have already been found, with many producing since the 1960s and 1970s. The oil and gas industry has developed new technologies to identify and gain access to smaller, thinner bands of reservoir rock that may contain oil and gas. Improved seismic techniques have improved the odds of accurately identifying the location of reservoirs that are smaller and more difficult to find. There is still a lot of oil and gas to be discovered and produced, but these future discoveries will be in deeper basins, and in more remote areas of the world. There will also be many small reservoirs found in existing oil and gas producing areas using advanced technologies.

Technological innovation not only makes it easier to find new deposits of oil and gas, but also enables industry to extract more from each individual reservoir that is discovered. For example, new drilling techniques have made it feasible to intersect a long, thin reservoir horizontally instead of vertically, enabling oil or gas from the reservoir to be recovered with fewer wells.

Reservoir - Geology and Exploration

2-2 Earth Movements


The earth was also undergoing change during forming the oil. Cooling in the centre of the earth resulted in massive movements of the crust, which buckled and folded, layers of rock slid past each other (faulting) or rock salt was forced by the weight of rocks above through the sedimentary rocks with the oil in them. These movements formed the different types of oil traps.

Tectonic movements of the Earth plates have profound effect on hydrocarbon formation, migration, and trapping. They are subdivided on convergent (collision of the plates) and divergent (separation of the plates) processes.

The collisions between continental plates lead to the formation of the oil and gas fields in the Persian Gulf, South Caspian and Ural-Timan-Pechora Province.

When oceanic plate submerges under continental, such movement is called subduction. During long geologic time organic remains were accumulated on the bottom of the ocean. Submerging, the oceanic plate carries huge volumes of organic deposits under continental plate, where at the conditions of high temperature and high pressure, biomass converts to hydrocarbons.

Figure 2.2 – Porous reservoir rock.

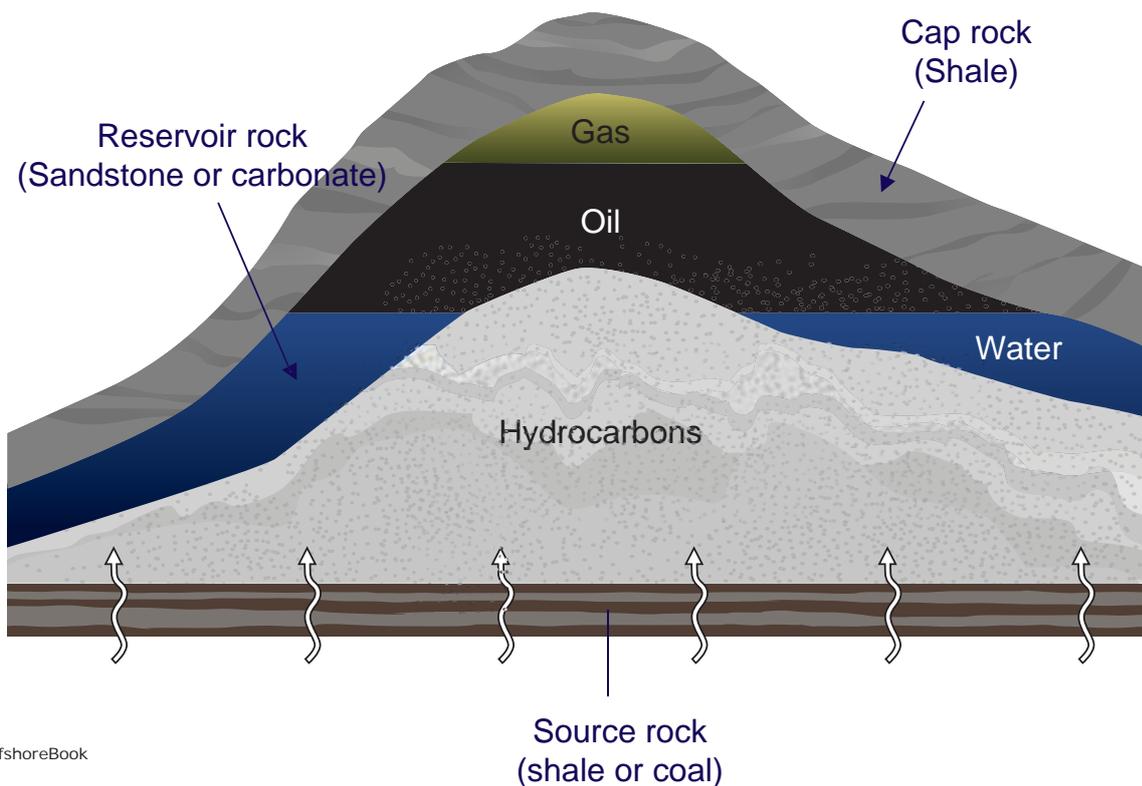

Moving apart, the plates create firstly the zones of spreading, where the thinning of crust occurs in the margin between plates. Further separation (rifting) often is accompanied by volcanism. In the result of that, the increase of temperature also facilitates the conversion of organic remains to the hydrocarbons. The gas and oil fields of the North Sea, West and East Siberia were formed in rifting zones.

Often the fields undergo through multi-phase history, where the most important tectonic event is difficult to distinguish.

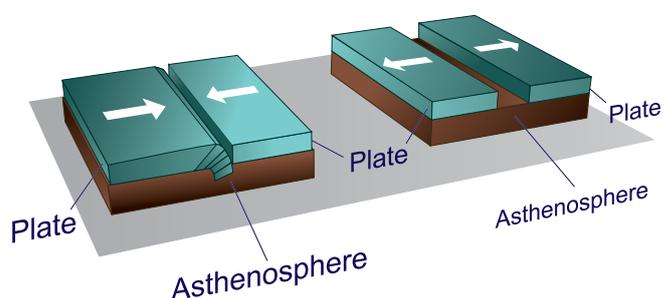


Figure. 2.2 The scheme of the movements of tectonic plates: a – convergent, b – divergent.

In places with interruptions in the layers of impervious rocks, oil and gas reached the surface of the earth. Here gas and the less dense parts of oil evaporated into the air, leaving the more dense tar-like chemicals behind. This was how people found bitumen lying in pools on the surface of the earth. Bitumen is a sticky black tar that is sometimes collected by digging pits..

2-3 Geology

A geologist collects small samples of rock. Sometimes these are dug out by hand. Alternatively cylindrical cores are drilled to produce samples which can be sectioned and studied under a microscope. These help them to find out:

- Where the rocks have come from (their origin)
- What they are made of (their composition)
- The stratigraphical arrangement of the rocks

Geologists determine the physical and chemical properties of rocks (mineralogy) as well as extinct and fossil animals and plants (paleontology). All these clues combined give information which makes it possible to build a picture of the area being surveyed. Petroleum geology refers to a specific set of geological disciplines that are applied in the search for hydrocarbons.

2-3-1 Sediment Maturation

Over a period of thousands of years, layers of mud and organic remains many km deep may pile up on the sea floor, especially in nutrient-rich waters. Given enough time, the overlying sediments that are constantly being deposited bury these organic remains and mud so deeply that they are eventually turned into solid rock. It is believed that high temperatures and intense pressure catalyze various chemical reactions, transforming micro-organisms found in deep-sea sludge into oil and natural gas. At this point, this sludge turns into source rock.

2-3-2 Reservoir Rock

Oil created by the source rock will be of no use unless it is stored in an easily accessible container, a rock that has room to “suck it up” as it was. Sandstone can accommodate large amounts of oil just like a sponge can soak up spills in your kitchen, and are for this reason the most common reservoir rocks in oil fields around the world. Limestones and dolostones, some of which are the skeletal remains of ancient coral reefs, are alternative examples of reservoir rocks – these last are often found in the North Sea.

The figure beside shows what a reservoir rock would look like through a magnifying glass. The areas between the rock grains (also known as “pore spaces”) are where oil is distributed in the rock.

2-3-3 Traps

Beneath the earth’s surface, oil oozes through rocks, if there is enough space between them, but it will not accumulate in large quantities unless something traps it in situ.

3 of the most predominant traps in the North Sea are:

- *Fold traps (anticline traps)*
Rocks which were previously flat, but have been formed into an arch. Oil that finds its way into this type of reservoir rock flows to the crest of the arch, and is trapped. Provided of course that there is a trap rock above the arch to seal in the oil.
- *Fault traps*
Formed by the movement of rock along a fault line. In some cases, the reservoir rock has positioned itself opposite a layer of impermeable rock, thus preventing the oil from escaping. In other cases, the fault itself can be a very effective trap. Clays within the fault zone are smeared as the layers of rock slip past one another. This is known as fault gouge.
- *Salt dome traps*
Salt is a peculiar substance. If enough heat and pressure are exerted on it, it will flow, very much like a glacier that slowly but continually moves downhill. Unlike glaciers, however, salt which is buried kilometers below the surface of the earth can move upwards until it breaks through the surface of the earth where it is dissolved by ground- and rain-water. To get to the surface, salt has to push aside and break through many layers of rock in its path. This is what ultimately creates the oil trap.

Other types of traps include stratigraphical traps and combination traps (where 2 or more trapping mechanisms come together to create the trap).

2-3-4 Seal/Trap Rock

Thousands of meters beneath the earth’s surface, oil is subjected to great pressure and because of this the oil tries to move to areas of less pressure. If this is possible, it will move upwards until it is above ground. This is what happens at oil seeps. While these seeps tell us there is oil below ground, it also tells us that some oil has already escaped, with the possible conclusion that there is not much left to find underground. Unlike a reservoir rock, which acts like a sponge, trap rocks act like walls and ceilings, and will not allow fluids to move through. The most common trap rock in the world is shale, which, when compared to many sandstones, has proportion-

Reservoir - Geology and Exploration

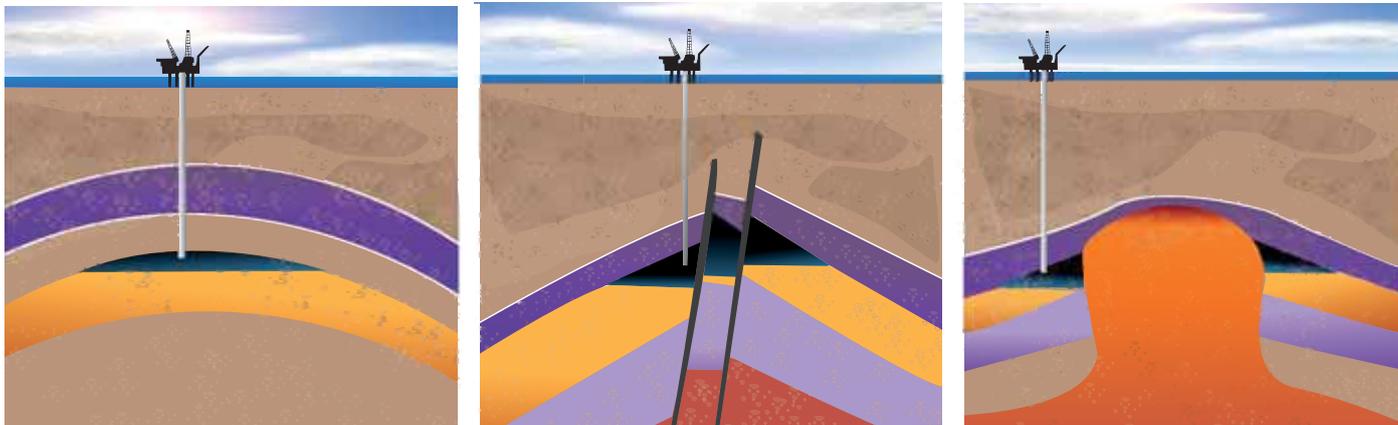


Figure 2.4 - Trap type (fold, fault and salt dome)

ally very little room inside for fluids (oil, for example) to migrate through it.

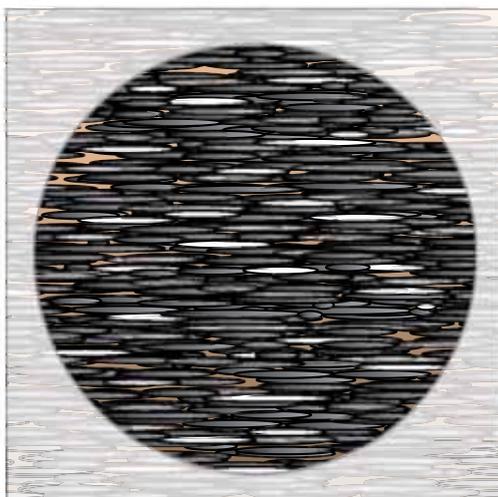


Figure 2.5 - Trap rock.

Though trap rocks block oil from moving through them, they do not always block oil from moving around them in order for a trap rock to do its job, some kind of geological trap is needed. This trap is defined as any geological structure that stops the migration of natural gas, crude oil and water through subsurface rocks.

Figure 2.4 shows what a trap rock would look like through a magnifying glass. The yellow objects represent clay particles that are packed together. Note the very small amount of space between the clay particles. The situation is comparable to individual playing cards being laid flat on top of one another - there is very little space in between. As a consequence of this, oil will not move through this rock - instead it will be blocked.

2-3-5 Measuring the Properties of Rocks

A geophysicist adds to the information of a geologist by studying the geophysics (physics of the earth, such as seismology, gravity and magnetic fields etc.) of the earth. Surveys of the magnetic field, of gravity measurements and of how waves travel through layers of rock are carried out.

Magnetometers measure very small changes in the strength of the earth's magnetic field. Sedimentary rocks are nearly non-magnetic, while igneous rocks have a stronger magnetic effect. Measurement of differences in the magnetic field makes it possible to work out the thickness of the sedimentary layers which may contain oil.

Shock waves or seismic waves are used to help creating a picture of deep rock structures. The theory is to produce artificial shock waves and record how they travel through the earth. The wave travels through the water and strikes the sea bed. Some of the energy of the wave is reflected back to the hydrophones at the surface of the sea. The rest of the wave carries on until it reaches another rock layer. The time taken for the waves to travel from the source to the hydrophones is used to calculate the distance travelled - hence the thickness of the rock layers. The amplitude of the wave gives information about the density of the reflecting rock. A survey using artificial shock waves is called a seismic survey. The data from such a survey is recorded and displayed by computer as a pattern of lines, called a seismograph.

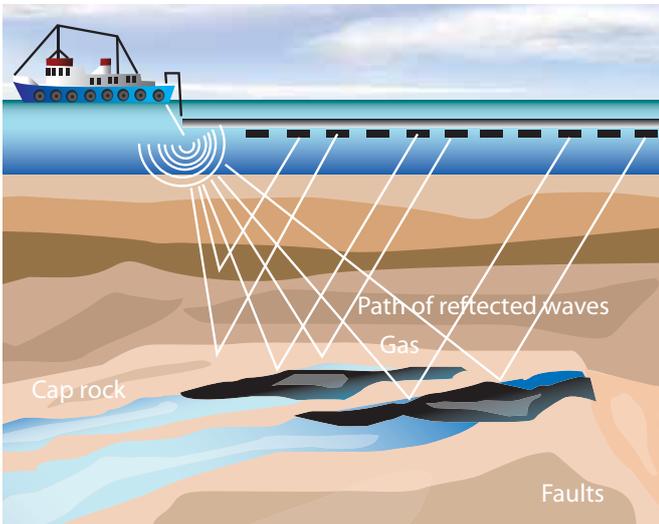


Figure 2.6 – Seismic survey.

2-4 Looking for Oil and Gas

Visible surface features such as oil and natural gas seeps and pockmarks (underwater craters caused by escaping gas) provide basic evidence of hydrocarbon generation (shallow or deep); however, most exploration depends on highly sophisticated technology to detect and determine the extent of these deposits. Areas thought to contain hydrocarbons are initially subjected to gravity or magnetic surveys to detect large scale features of the sub-surface geology. Features of interest, known as leads, are subjected to more detailed seismic surveys which create a profile of the substructure. Finally, when a prospect has been identified and evaluated and passes the oil company’s selection criteria, an exploration well is drilled to determine conclusively the presence or absence of oil or gas.

To discover what geometries and lithologies (a subdivision of petrology focusing on macroscopic hand-sample or outcrop-scale description of rocks) rocks might possess underground, geologists examine the rocks where they are exposed in surface outcrops (onshore sites), or they examine aerial photographs and satellite images when surface access is limited. Geologists also work closely with geophysicists to integrate seismic lines and other types of geophysical data into their interpretations.

As described in chapter 2-3-5 the collection of seismic data involves sending shock waves into the ground and measuring how long it takes subsurface rocks to reflect the waves back to the surface. Boundaries between the rocks reflect back the waves, the arrival times at the surface of which are detected by listening devices called geophones. Computers then process the geophone data and convert it into seismic lines which are nothing more than two-dimensional displays that

resemble cross-sections. Seismic lines in the old days were just that - 2-dimensional lines created by laying geophones out in single line. But today, data is commonly collected as an intersecting grid of seismic lines referred to as 3-D seismic volume. Data collected in this fashion may even be used to help create 3-D computer models of the underground geometries of the rocks. Most of the money spent by the petroleum industry in oil exploration is used on geophysics and wildcat wells.

Geophysics provide techniques for imaging of the subsurface prior to drilling, and can be the key to avoiding “dry holes.”

Geological and geophysical clues are encouraging, but drilling is the only way to learn, if an oil or gas field really exists. Once a well is drilled, well logs yield data on the types of rock present and, most important, what fluids these rocks contain. The information derived from these logs is used to decide whether a well should be completed and oil and gas production initiated, or whether it should be filled with cement and abandoned. The logs are also used to update the geological models originally used to locate the well.

Today, the average wildcat well has only one chance in ten of finding an economic accumulation of hydrocarbons. A rank wildcat, if drilled in a frontier area, stands only one chance in forty of success.

The odds are much better for a development or extension well, but nothing is a sure bet in the oil business. So even though oil and gas prospectors of today have better tools than their predecessors, luck remains a significant factor in the search for oil and gas. Reality is that most wildcats turn out to be dry holes and not every development well becomes a producer.

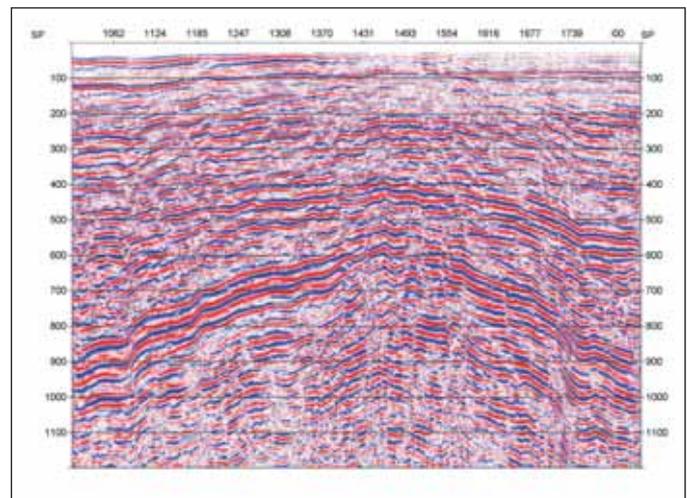


Figure 2.7 Sample 2-D marine seismic line. The line is merged from individual shots (along the X-axis), and the Y-axis displays the time in thousands of a second it takes the seismic wave to travel from the surface to a reflector and back again

Reservoir - Geology and Exploration

2-5 Exploration Methods

Oil exploration is an expensive, high-risk operation. Offshore and remote area exploration is generally only undertaken by very large corporations or national governments. Typical shallow shelf oil wells - e.g. in the North Sea - cost tens of millions Euros. Deep water wells can even cost hundreds of millions Euros. But hundreds of smaller companies search for onshore hydrocarbon deposits world-wide, where some wells cost as little as half a million Euros.

When the well is drilled, it is time for Logging Methods of exploration. The electronic tools are run into the borehole to make different types of measurements in order to view in a graphical manner and determine reservoir petro physical parameters such as porosity, permeability and saturation for analysis, evaluation, and modeling purposes of the subsurface features.

Types of measuring regimes include wire line and while drilling measurement. In a wire line regime, the measurements of formation properties with electrically powered instruments occur continuously while logging tools are run along the walls of the well. Measurement while drilling is a technique of conveying well logging tools into the well borehole down hole as part of the bottom hole assembly.

Mostly, the logging tools consist of source or transmitters and detectors or receivers of different signals. The logging methods are designed to determine such properties of fluids and rocks like natural and induced radioactivity, electrical potential and conductivity, nuclear reactions and travelling of sound waves.

Gamma ray log measures naturally occurring gamma radiation to characterize the rock in the borehole, especially to indicate shale having high natural radioactivity, to distinguish from reservoir rocks.

The resistivity log is fundamental in formation evaluation because the difference in conductivity of different rocks helps to indicate hydrocarbons.

2-6 Reserve Types

2-6-1 Proved Reserves

Proved reserves are those quantities of petroleum that - by analysis of geological and engineering data - can be estimated with reasonable certainty to be commercially recoverable, from a given date forward, from known reservoirs and under current economic conditions, operating methods, and government regulations. Proved reserves can be categorized as developed or undeveloped.

If deterministic methods are used, the term reasonable certainty is intended to express a high degree of confidence that the quantities will be recovered. If probabilistic methods are used, there should be at least a 90% probability that the quantities actually recovered will equal or exceed the estimate.

2-6-2 Unproved Reserves

Unproved reserves are based on geologic and/or engineering data similar to that used in estimates of proved reserves; but technical, contractual, economic, or regulatory uncertainties preclude such reserves being classified as proved. Unproved reserves may be further classified as probable reserves and possible reserves.

Unproved reserves may be estimated assuming future economic conditions different from those prevailing at the time of the estimate. The effect of possible future improvements in economic conditions and technological developments can be expressed by allocating appropriate quantities of reserves to the probable and possible classifications.

2-6-2-1 Probable Reserves

Probable reserves are those unproved reserves which analysis of geological and engineering data suggests are more likely than not to be recoverable. In this context, when probabilistic methods are used, there should be at least a 50% probability that the quantities actually recovered will equal or exceed the sum of estimated proved plus probable reserves.

2-6-2-2 Possible Reserves

Possible reserves are those unproved reserves which analysis of geological and engineering data suggests are less likely to be recoverable than probable reserves. In this context, when probabilistic methods are used, there should be at least a 10% probability that the quantities actually recovered will equal or exceed the sum of estimated proved plus probable plus possible reserves.

Chapter 3

Drilling Operations

3-1 Overview

The largest and most critical investment for any oil company is that of drilling and intervening in wells. The first step in drilling operations is to review all available offset drilling data to shorten the learning and expense curves. An efficient and fully documented well design follows, and a comprehensively engineered program is drafted to ensure that the rig team has all the necessary information to complete the work safely.

The creation and life of a well can be divided into 5 stages:

- Planning
- Drilling
- Completion
- Production
- Abandonment

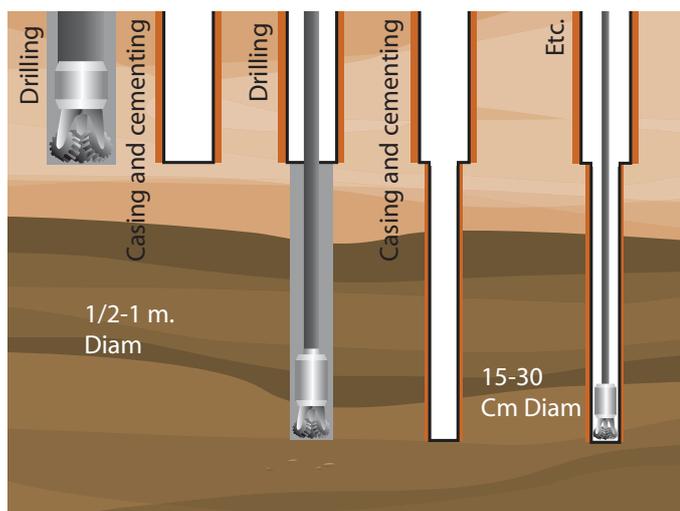


Figure 3.1 – Drilling of a well.

3-1-1 Drilling

A well is created by drilling a hole between 13 and 76 cm in diameter into the earth with an oil rig that rotates a drill bit. Once the hole is drilled, a steel pipe (casing) slightly smaller than the hole is placed in the hole and secured with cement. This casing provides structural integrity for the newly drilled well bore in addition to isolating potentially dangerous high pressure zones from each other and from the surface. The outer tube, “casing”, is hence used to prevent the drilled hole from collapsing. Inside the casing a production tube is lowered as explained in detail in the next chapter.

With the high pressure zones safely isolated and the formation protected by the casing, drilling of the well can proceed deeper (into potentially more unstable and violent formations) with a smaller bit, and is also cased off with a smaller sized casing. Modern wells often have 2-5 sets of ever decreasing diameters drilled inside one another, each with a cemented casing.

3-1-2 Completion

After drilling and casing the well must be ‘completed’. Completion is the process by which the well is prepared to produce oil or gas. In a cased-hole completion, small holes called perforations are made, by fixing explosive charges in the portion of the casing which passes through the production zone, providing a passage for the oil to flow from the surrounding rock into the production tubing. In open hole completion (an open hole completion consists of simply running the casing directly down into the formation, leaving the end of the piping open, with no protective filter), ‘sand screens’ or a ‘gravel pack’ are often installed in the last drilled, uncased reservoir section.

These maintain structural integrity of the well bore in the absence of casing, while still allowing flow from the reservoir into the well bore. Screens also control the migration of formation sands into production tubes and surface equipment. After a flow path has been established, acids and fracturing fluids may be pumped into the well to fracture, clean, or otherwise prepare and stimulate optimal production of hydrocarbons in the well bore by the reservoir rock. Finally, the area above the reservoir section of the well is isolated inside the casing and connected to the surface via the pipe of smaller diameter, namely the production tubes. This arrangement provides an extra barrier to hydrocarbon leaks as well as allowing damaged sections to be replaced. The smaller diameter of the tubing has the added advantage of hydrocarbons being produced at a greater velocity which overcomes the hydrostatic effects of heavy fluids such as water.

In many wells, the natural pressure of the subsurface reservoir is high enough for the oil or gas to flow to the surface. However, this is not always the case, as in depleted fields where the pressure has been lowered by other producing wells, or in low permeability oil reservoirs. Installing tubing with a smaller diameter may be enough to facilitate production, but artificial lift methods may also be needed.

Common solutions include down hole pumps and gas lifts. The use of artificial lift technology in a field is often termed as “secondary recovery” in the industry. In the last ten years many new systems have been introduced to the well completion field, especially in the case of horizontal wells.

Drilling Operations

3-1-3 Production

The production stage is the most important stage of the life of a well, when oil and gas are produced. By this time, the oil rig and/or workover rig used to drill and complete the well have moved off the well bore, and the top is usually fitted with a collection of valves called a “Christmas Tree”. These valves regulate pressure, control flow, and allow access to the well bore, when further completion work is necessary. From the outlet valve of the Christmas Tree, the flow can be connected to a distribution network of pipelines and tanks to distribute the product to refineries, natural gas compressor stations, or oil export terminals.

As long as the pressure in the reservoir remains high enough, this Christmas Tree is all that is required for production from the well. If the pressure diminishes and the reservoir is considered economically viable, the artificial lift methods mentioned in the completions section can be employed.

Enhanced recovery methods such as water, steam, CO₂ and gas injection may be used to increase reservoir pressure and provide a “sweep” effect to push hydrocarbons out of the reservoir. Such methods require the use of injection wells (often chosen from old production wells in a carefully determined pattern), and are frequently used when facing problems with reservoir pressure depletion, high oil viscosity. They can also be established early in a field’s life. In certain cases – depending on the geomechanics of the reservoir– reservoir engineers may determine that ultimate recoverable oil may be increased by applying a water flooding strategy earlier rather than later in the field’s development. The application of such enhanced recovery techniques is often termed “tertiary recovery” in the industry.

3-1-4 Abandonment

When a well no longer produces or produces so poorly that it is a liability to its owner, it is abandoned. In this simple process, tubing is removed from the well and sections of well-bore are filled with cement so as to isolate the flow path between gas and water zones from each other as well as from the surface. Filling the well-bore completely with concrete is unnecessary and the cost prohibitive.

3-2 Types of Wells

Oil wells come in many varieties. They can be classified according to the type of fluid produced. Some wells produce oil, others produce oil and natural gas, and finally wells that only produce natural gas. Natural gas is almost always a byproduct of oil production, since the short, light carbon chains readily come out of solution due to pressure reduction as it flows from the reservoir to the surface (similar to uncapping a bottle of a fizzy drink where the carbon dioxide bubbles out). Unwanted natural gas can be a disposal problem at the well site. If there is not a market for natural gas near the well-head it is virtually valueless, unless it can be piped to the end user. In the Danish part of the North Sea for instance, an elaborate network of gas interfield and transmission pipelines gives direct access to the end user via offshore and onshore pipelines. However, in many oil exporting countries until recently unwanted gas was burned off at the well site. Due to environmental concerns this practice is becoming less politically correct and also in recent years less economically viable. The unwanted or ‘stranded’ (i.e. without a market) gas is often pumped back into the reservoir through an ‘injection’ well for disposal or for re-pressurizing the producing formation. Another more sound economic and environmental friendly solution is to export natural gas as a liquid – also known as Liquefied Natural Gas or LNG.

Another obvious way to classify oil wells is whether they are situated onshore or offshore. There is little difference in the well itself; an offshore well simply targets a reservoir that also happens to be underneath an ocean. However, due to logistics, drilling an offshore well is far more expensive than an onshore well. Most new major oil fields are today found offshore.

Wells can also be classified according to the purpose for which they are used.

They can be characterized as:

- **Wildcat wells** - when a well is drilled, based on a large element of hope, in a frontier area where very little is known about the subsurface. In many areas oil exploration has reached a very mature phase and the chances of finding oil simply by drilling at random are very low. Therefore, a lot more effort is placed in exploration and appraisal wells.
- **Exploration wells** - when they are drilled purely for exploratory (information gathering) purposes in a new area.
- **Appraisal wells** - when they are used to assess characteristics (e.g. flow rate) of a proven hydrocarbon reservoir.
- **Production wells** - when they are drilled primarily for producing oil or gas, once the producing structure and characteristics are established.

At a producing well site, active wells may be further categorized as:

- **Oil producers** - producing predominantly liquid hydrocarbons, mostly with some associated gas.
- **Gas producers** - producing virtually entirely gaseous hydrocarbons.
- **Water injectors** - where water is injected into the formation either to maintain reservoir pressure or simply to dispose of water produced at the same time as the hydrocarbons, because even after treatment it would be too oily to dump overboard and too saline to be considered clean for offloading into a fresh water source, in the case of onshore wells. Frequently, water injection is an integral part of reservoir management and produced water disposal.
- **Aquifer producers** - producing reservoir water for re-injection to manage pressure. In effect this is moving reservoir water from a less to a more useful site.
- **Gas injectors** - where gas is often injected into the reservoir as a means of disposal or sequestering for later production, but also as a means to maintaining reservoir pressure.

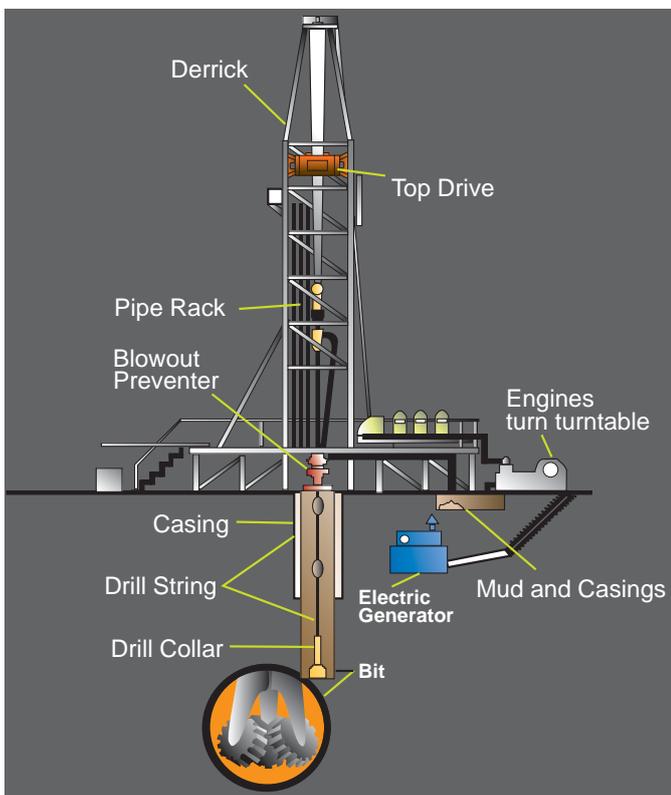


Figure 3.2 – Drilling set-up.

3-3 Well Drilling

3-3-1 Preparing to drill

Once the site has been selected, it must be surveyed to determine its boundaries, and environmental impact studies may be carried out. Lease agreements, titles and right-of way accesses for the place must be obtained and evaluated legally. For the offshore sites, legal jurisdiction must be determined.

3-3-2 Setting Up the Rig

Sea-based oil platforms and oil drilling rigs are some of the largest moveable man-made structures in the world. Below are listed 3 of the most common types of drilling rigs used in the North Sea.

- **Semi-submersible Platforms**

These platforms have legs of sufficient buoyancy to cause the structure to float, but of sufficient weight to keep the structure upright. Semi-submersible rigs can be moved from place to place; and can be ballasted up or down by altering the level of flooding in the buoyancy tanks; they are generally anchored by cable anchors during drilling operations, though they can also be kept in place by the use of dynamic positioning. Semi-submersibles can be used in depths from around 80 to 1,800 m.

- **Jack-up Platforms**

Like the name suggests, are platforms that can be jacked up above the sea by 3 or 4 supporting columns (legs) that can be lowered like jacks. A hydraulic system allows the supporting columns to be moved up and down. These platforms, used in relatively low water depths, are designed to be moved from place to place, and are then anchored by deploying the jack-like legs.

- **Drillships**

Maritime vessels that have been fitted with a drilling package. It is most often used for exploratory drilling of new oil or gas wells in deep water, but they can also be used for scientific drilling. A drillship is often built on a modified tanker hull and fitted with a dynamic positioning system to maintain its position over the well.

Due to the relatively shallow waters in the Danish oil producing part of the North Sea, mostly jack-up platforms are used here, whilst in Norway and United Kingdom semi-submersible platforms are also used. Drillships are primarily used in the US and Asia.

Drilling Operations

Main system and drilling rigs include:

Power system

- Large diesel engines - burn diesel fuel oil to provide the main source of power.
- Electrical generators - powered by the diesel engines to provide electrical power.
- Mechanical system - driven by electric motors.
- Hoisting system - used for lifting heavy loads; consists of a mechanical winch (drawworks) with a large steel cable spool, a block-and-tackle pulley and a receiving storage reel for the cable.
- Rotary Table - part of the drilling apparatus Rotating equipment - used for rotary drilling.
- Swivel - large handle that holds the weight of the drill string; allows the string to rotate and makes a pressure tight seal on the hole.
- Kelly - 4 or 6 sided pipe that transfers rotary motion to the turntable and drill string.
- Rotary table - provides the rotating motion using power from electric motors.
- Top Drive – Rotates the drill string either by means of an electrical or hydraulic motor. Replaces the rotary table and the 4 or 6 sided kelly bushing. This is the modern and most common drilling system used today.
- Drill string - consists of a drill pipe made up of connected sections about 10 m each and drill collars (a heavier pipe with a larger diameter that fits around the drill pipe and places weight on the drill bit).
- Drill bit(s) – at the end of the drill that actually chisels the rock; come in many shapes and materials (tungsten carbide steel, diamond) and are specialized for various drilling tasks and adapted to specific rock properties.

Circulation system pumps drilling mud (e.g. a mixture of water, clay, weighting material and chemicals, used to lift drill cuttings from the drill bit to the surface) under pressure through the drill pipes and drill collars

- **Pump** - sucks mud from the mud pits and pumps it into the drilling apparatus.
- **Pipes and hoses** - connect pump to drilling apparatus.
- **Mud-return line** - returns mud from hole.
- **Shale shaker** - shaker/sieve that separates rock cuttings from the mud.
- **Shale slide** - conveys cuttings to transport skips or overboard for disposal.
- **Reserve pit** - collects drill cuttings separated from the mud.
- **Mud pits** - where drilling mud is mixed and recycled.
- **Mud-mixing hopper** - where new mud is mixed and sent to the mud pits.

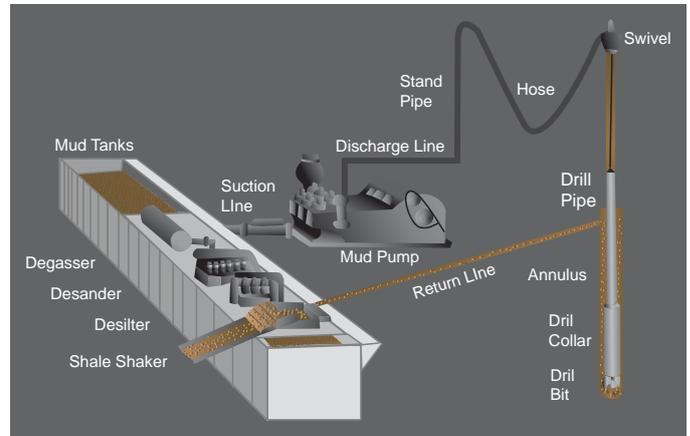


Figure 3.3 – Mud Circulation System.

- **Derrick** - support structure that holds the drilling apparatus.
- **Blowout preventer** – a system of high-pressure valves. Located under the rotary table/diverter or on the sea floor, it seals the high-pressure drill lines and relieves pressure when necessary to prevent a blowout (uncontrolled gush of gas or oil to the surface, often associated with fire).

Central personnel required for operating and overseeing drilling and completion operations as well as a short description of duties are listed below:

- **Company Representative:** a Company Man is a representative for the oil company. Other terms that may be used are: Drilling Foreman, Drilling Engineer, Company Consultant, or Rig Site Leader.

The company man is in direct charge of most operations pertaining to the actual drilling and integrity of the well bore.

In the offshore oil and gas business he usually reports to the drilling Superintendent onshore.

- **OIM (Oilrig Installation Manager):** the OIM is the most senior member of management offshore for the drilling contractor. His main responsibility is the safe operation of the offshore installation.
- **Tool pusher:** the tool pusher is the person responsible for drilling operations on the drilling rig. Tool pushers are in charge of keeping the rig supplied with all the necessary tools and equipment, supplies, etc. They work closely with the OIM and Company Representative with regards to the actual drilling of the well.
- **Tour pusher:** Sometimes referred to as the Night pusher and has the same responsibilities as the Tool pusher. Reports to the Tool pusher and OIM.

- **Driller:** The driller is a team leader in charge of drilling the well bore and operating the hoisting equipment. The Driller is in charge of his drill crew, and runs the rig itself. He is responsible for interpreting the signals the well sends regarding pressure of gas and fluids. In an emergency situation he is also responsible for taking the correct counter measures to stop an uncontrolled well control situation from emerging. The driller will watch for gas levels, the flow of drilling mud and other information. While tripping out, the driller will run the floor and work the rig.
- **Assistant Driller:** His general responsibility is to assist the driller by keeping records and paperwork up to date. Training and instructing the floor hands and newly hired personnel. Over time this may allow the assistant driller to qualify for a position as driller.
- **Roustabout:** A new entrant starts as a roustabout. No formal academic qualifications are needed, but many employers want people with some relevant experience. Applicants must usually pass a medical before working offshore. Most new roustabouts start in their 20s.

Roustabouts, who show ability, can advance to roughnecks after about 6 months. Further steps in the career path may be assistant driller and driller.

- **PRS Operator:** this is a somewhat new position at some rigs in the North Sea. PRS stands for Pipe Racking System. This is an automated system that allows the drill pipe to be racked by a man stationed in the room alongside the driller. It also eliminates the need for the derrickman to go aloft on the derrick to guide the drill pipe into the wellhead.
- **Derrickman:** the derrickman or derrickhand reports to the assistant driller or to the Driller when required. The name Derrickman comes from the position that he normally occupies which is at the top of the derrick. From this position he guides the strands of drill pipe (typically 25-30 m long) into the wellhead at the top of the derrick while tripping out the hole. When tripping out the hole he pulls the pipe out of the fingers and guides it into the top drive or the travelling block. Traditionally the derrickman works closely with the mud engineer when not tripping out pipe since he is not needed in the derrick. In this capacity it is his responsibility to monitor the mud weight and density, to add chemicals to the mud to maintain its properties as well as monitor the mud level in the mud pits to assist in well control.

Depending on country and operator other terms may be used for the drilling and completion personnel.

3-3-3 Drilling the Well

Once the site has been surveyed and the rig positioned over the area of interest, a drilling template is placed onto the seabed. This is a metal structure with a conical pipe arrangement placed where the wells will be drilled. The drilling template is secured into the seabed with piles. Next, a conductor hole is either drilled or driven to the required depth. The crew then drills the main portion of the well. The first part of the hole is larger and shorter than the main portion and is lined with a large diameter conductor pipe.

Sometimes, if a survey shows the presence of a structure which potentially may contain oil and gas, an exploratory well is drilled. The next stage is to drill appraisal wells to find out how much oil and gas are present, and whether it is worth developing the field.

To drill the well, the following steps are taken:

- The drill bit, aided by rotary torque or mud motor and the compressive weight of drill collars above it, breaks up the earth.
- Drilling mud (also known as “drilling fluid”) is pumped down inside the drill pipe and exits at the drill bit where it helps to break up the rock, controls formation pressure, as well as cleaning, cooling and lubricating the bit.
- The generated rock “cuttings” are swept up by the drilling mud as it circulates back to surface outside the drill pipe. They go over “shakers” which shake out the cuttings over screens allowing the cleaned mud to return back into the pits. Watching for abnormalities in the returning cuttings and volume of returning fluid are imperative to catch “kicks” early. A “kick” refers to a situation where the pressure below the bit is higher than the hydrostatic pressure applied by the column of drilling fluid. When this happens gas and mud gushes up uncontrollably.
- The pipe or drill string to which the bit is attached is gradually lengthened as the well gets deeper by joining 10-20 m lengths of threaded drill pipe at the surface. 3 joints (treble) combined equal 1 stand. Some smaller rigs only use 2-joint (double) stands while newer rigs can handle stands of 4 joints (fourable).

The drilling rig contains all necessary equipment to circulate the drilling fluid, hoist and turn the pipe, control down-hole pressures and remove cuttings from the drilling fluid. It also generates on site power for these operations.

Drilling Operations

There are 5 basic steps to drilling the hole:

1. Place the drill bit, collar and drill pipe in the hole.
2. Attach the Kelly or Top-drive and begin drilling.
3. As drilling progresses, circulate mud through the pipe and out of the bit to float the cuttings out of the hole.
4. Add new sections (joints) of drill pipes as the hole goes deeper.
5. Remove (trip out) the drill pipe, collar and bit when the required depth is reached or drill bit fails.

The casing crew puts the casing pipe in the hole. The cement crew pumps cement down the casing pipe using a bottom plug, cement slurry, a top plug and drill mud. The pressure from the drill mud causes the cement slurry to move through the casing out through the bottom of the well. The slurry then backtracks up around the casing to fill the void between the outside of the casing and the hole. Finally, the cement is allowed to harden and then tested for hardness, alignment and tightness.

Drilling continues in stages: Drilling, running and cementing new casings, then drilling again.

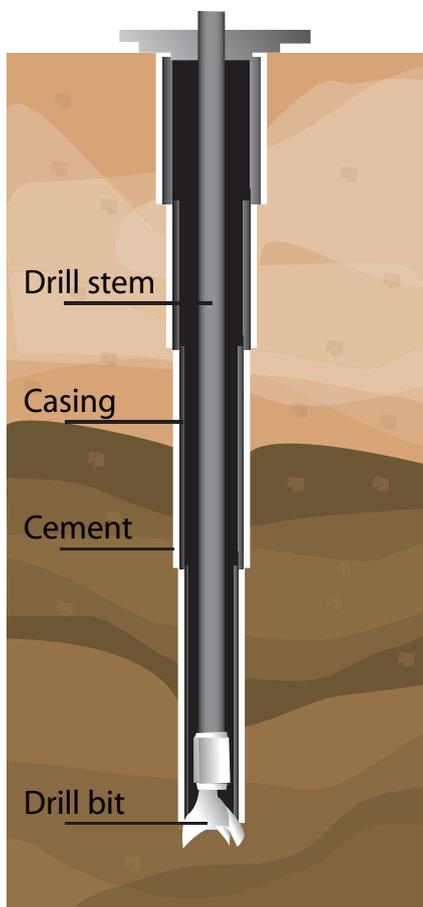


Figure 3.4 – Drilling of a well.

When rock cuttings from the mud reveal oil in the reservoir rock, the final depth may have been reached. At this point, drillers remove the drilling apparatus from the hole and perform several tests to confirm this finding:

- Well logging - lowering electrical and gas sensors into the hole to take measurements of the rock formations there
- Drill-stem testing - lowering a device into the hole to measure pressures, which will reveal whether a reservoir rock has been reached
- Core samples - taking samples of rock to look for characteristics of a reservoir rock

Once drillers have reached the final depth, the crew completes the well to allow oil to flow into the casing in a controlled manner.

First they lower a perforating gun into the well down to the production depth. The gun has explosive charges which perforate holes in the casing through which oil can flow. After the casing has been perforated, they run a small-diameter pipe (tubing) into the hole as a conduit for oil and gas to flow up the well.

A device called a packer is run down the outside the tubing. When the packer reaches the production level, it is expanded to form a seal around the outside of the tubing. Finally, a multi-valved structure called a Christmas Tree is connected to the top of the tubing and fastened to the top of the casing. The choke valve on the Christmas Tree allows the flow of oil from the well to be controlled. Once the well is completed, flow of oil into the well must be initiated.

For limestone reservoir rock, acid is sometimes pumped down the well and out the perforations. The acid dissolves the limestone creating channels through which oil can flow into the well. For sandstone reservoir rock, a specially blended fluid containing proppants (sand, walnut shells, aluminum pellets) is pumped down the well and out through the perforations. The pressure from this fluid creates small fractures in the sandstone which in turn allow oil to flow into the well, while the proppants hold these fractures open. Once the oil is flowing, the oil rig is removed from the site, and production equipment is set up to extract oil from the well.

3-3-4 Drilling Bits

The drilling part that actually chisels away at soil, rock and other materials, as a well is being dug, is called a drill bit and is an essential tool in the drilling of a well. In recent years, technological advances have made such tools more efficient, longer lasting and less expensive.

A drill bit is edged with diamonds or carbide to make the cutters extremely hard. Mud circulates through the bit.

3-3-5 Logging while Drilling

Basic forms of logging while drilling, where a driller views the inside of the hole being drilled, have been around for some time. Records are made in real time and focuses on events, checks and lessons learned.

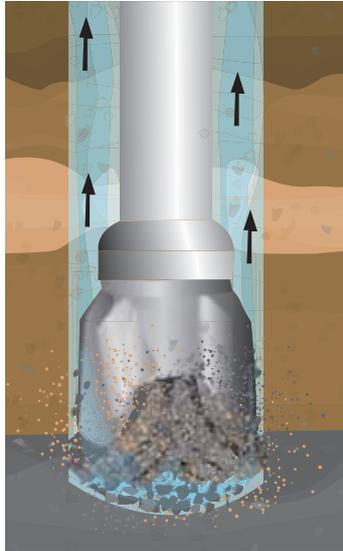


Figure 3.5 – Drill bit.

Logging includes visual wall-logging, in which a geologist physically inspects the wall of a hole being drilled. In this field technique, an area being drilled is sampled as progress is made.

In core logging, samples are drawn from the hole to determine what exactly is being drilled. These samples, once brought to the surface, are tested both physically and chemically to confirm findings. Radioactivity logging involves measuring radioactivity beneath the ground and helps determine what type of substance is being drilled, be it rock, shale, natural gas or crude oil.

A recent innovation allows what is called open-hole logging. With this technique, a magnetic resolution induction log, working on the same premise as a medical MRI, uses 2 magnets to determine substances being drilled. One continually fixed magnet reflects intermittent pulses from an electromagnet. The pulsing rates change with varying substances, giving off one rate for shale and another for oil and yet another for natural gas. Such techniques make drilling more efficient and more cost effective which eventually could lead to lower consumer prices for oil-related products.

3-3-6 Drilling Mud

Drilling fluids, including the various mixtures known as drilling mud, do the following essential jobs in oil and gas wells:

- Lubricate the drill bit, bearings, mud pump and drill pipe, particularly as it wears against the sides of the well when drilling deviated wells.
- Drives the mud motor at the end of the drill string unless the rig is top or table driven.

- Clean and cools the drill bit as it cuts into the rock.
- Lift cuttings to the surface and allow cuttings to drop out into the mud pit or shakers to prevent them recirculating.
- Regulate the chemical and physical characteristics of the mixture arriving back at the drilling rig.
- Carry cement and other materials to where they are needed in the well.
- Provide information to the drillers about what is happening down-hole - by monitoring the behaviour, flow-rate, pressure and composition of the drilling fluid.
- Maintain well pressure and lubricate the borehole wall to control cave-ins and wash-outs.
- Prevent well blow-outs - by including very heavy minerals such as bentonite to counteract the pressure in the hole.

The main classification scheme used broadly separates the mud into 3 categories based on the main component that makes up the mud:

- Water Based Mud (WBM). This can be sub divided into Dispersed and Non-Dispersed.
- Non Aqueous or more commonly ‘Oil Based Mud’ (OBM) this also includes synthetic oils (SBM).
- Gaseous or Pneumatic mud.

Drilling muds are made of bentonite and other clays, and/or polymers, mixed with water to the desired viscosity. Muds transport the other components in drilling fluids down the drill pipe and bring cuttings back up the well. By far the largest ingredient of drilling fluids, by weight, is barite (BaSO_4), a very heavy mineral with a density of 4.3 to 4.6 kg/l.

Over the years individual drilling companies and their expert drillers have devised proprietary and secret formulations to deal with specific types of drilling jobs.

Details of Use

On a drilling rig, mud is pumped from the mud pits through the drill string, where it sprays out nozzles on the drill bit, cleaning and cooling the drill bit in the process. The mud then carries the cuttings up the annulus between the drill string and the walls of the hole being drilled, up through the surface casing, and back at the surface. Cuttings are then filtered out at the shale shakers, and the mud returns to the mud pits. The returning mud can contain natural gases or other flammable materials. These can collect in and around the shale shakers area or in other work areas. There is a potential risk of a fire, an explosion or a detonation occurring if they ignite. In order to prevent this, safety measures have to be taken. Safety procedures, special monitoring sensors and explosion-proof certified equipment have to be installed, e.g. explosion-proof certified electrical wiring or control panels. The mud is then pumped back down and is continuously

Drilling Operations

recalculated. After testing the mud is treated periodically in the mud pits to give it properties that optimize and improve drilling efficiency.

3.3.7 Offshore Chemicals

A lot of chemicals are used at oil platforms. 25 product categories are listed, the name of each category tells what purpose the chemical is used for:

Acidity control	Drag reducing agent
Antifoam	Dye
Asphaltene dissolver	Flocculant
Asphaltene inhibitor	Gas hydrate inhibitor
Biocide	Hydraulic fluid
Carrier solvent	Hydrogen sulphide scavenger
Coagulant	Oxygen scavenger
Coolant	Scale dissolver
Corrosion inhibitor	Scale inhibitor
Demulsifier	Water clarifier
Deoiler	Wax dissolver
Detergent/cleaning fluid	Wax inhibitor
Dispersant	

Table 3.1 – Chemical products used offshore.

The Danish Environmental Protection Agency (Miljøstyrelsen) approves and authorises the use of emissions of chemicals to the sea environment. The emissions are regulated by two Danish laws (Havmiljøloven and Offshore-bekendtgørelsen) and the basis for these Danish laws are the regulations of the OSPAR.

According to Danish laws the operator shall carry out a pre-screen test of the chemical compounds in the offshore chemical to classify the chemical as: black, red, yellow or green, where black makes the most damage to the sea environment and green makes little or no damage.

Danish oil rigs used 129,000 t of the different types of chemicals in 2001. The emission to the North Sea was 320,000 tons in total (2001), of which Denmark emitted 55,000 tons (17%). By 2004, the discharge from the Danish operators in the North Sea had fallen to 35,500 tons. The 35,500 tons are distributed as follows:

Black	0%	60 kg
Red	1.2%	426 t
Yellow	8.8%	3124 t
Green	90%	31950 t

Table 3.2 - Discharges (2004) of offshore chemicals to the Danish North Sea. (From Danish Environmental Protection Agency).

The Danish Authorities have the goals to eliminate the black chemicals all together, to substitute the red chemicals and in the longer term to substitute the yellow chemicals by 2020. Currently approximately 300 different chemicals are used in the Danish offshore sector, and they are delivered by 20 suppliers. Of the 300 different chemicals there are:

- 105 red chemicals
- 55 yellow chemicals
- 140 green chemicals

3-3-8 Horizontal Drilling

Not all oil deposits are readily accessible to a traditional vertical well. In this situation surface drilling equipment is offset from the oil deposit. At the outset of the drilling process, the well is drilled vertically, and then a few degrees at a time it turns in whichever direction is needed to hit the reservoir. Horizontal drilling itself has been around for some time, but approximately 10 years ago it regained popularity in its use to increase production from narrow, fractured formations. When a vertical well is drilled through a narrow pay zone, its exposure to the pay zone is limited, but if the well is horizontal and runs in the pay zone it allows for a much better performance of the well.

In 1987, Maersk Oil in Denmark drilled the world's first horizontal well equipped with a cemented liner and multiple hydraulically induced, sand propped fractures for drainage and productivity enhancement.

Maersk Oil, together with the service industry, developed technologies to selectively perforate, stimulate and isolate individual zones in horizontal wells as well as other well technologies.

The company has performed more than half a thousand sand propped fracture operations. In 1991, a world record was set, when 12.4 million pounds of sand were pumped into a 1,500 m long horizontal well. Maersk Oil has furthermore performed more than 160 acid fractures in horizontal wells, and Maersk Oil's technologies continue to be progressed. Later innovations include water jetting for stimulation and controlled acid jetting, developed to stimulate very long horizontal well sections outside coiled tubing reach. The controlled acid jet technique employs an uncemented liner with controlled reservoir access, ensuring efficient acid stimulation of the complete horizontal well section.

A horizontal drilling record was set by Maersk Oil Qatar in 2004, when a horizontal well drilled in the Al Shaheen Field reached a total depth of 9.4 km with a horizontal section of 8.1 km.

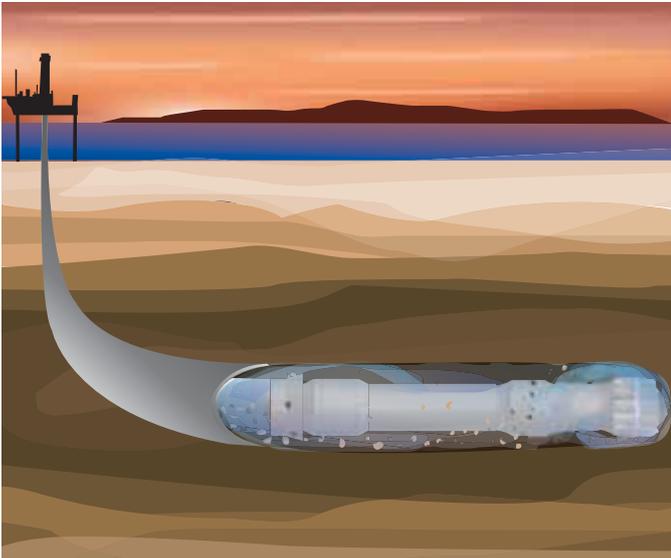


Figure 3.6 – Horizontal drilling.

Maersk Oil has pursued a stepwise development of the fields so that new data and technology may rapidly be implemented in further development steps. This has been facilitated by seeking maximum integration and flexibility between different field developments. Hereby, maximum use of existing processing facilities and infrastructure has been possible in each development step. This approach has been the key to obtaining the technically efficient and economic development of the marginal fields and field flank areas discovered in Denmark. This has produced results in the form of far greater production of oil and gas as well as lower costs, and it has turned the company into a front runner in various aspects of oil and gas production internationally thanks to the acquired expertise and an innovative approach.

3-4 Well Completion

Once the design well depth is reached, the formation must be tested and evaluated to determine whether the well should be completed for production, or plugged and abandoned.

To complete the well production, casing is installed and cemented, and the drilling rig is dismantled and moved to another site. Well completion activities include:

- Conducting Drill Stem Test
- Setting Production Casing
- Installing Production Tubing
- Initiating Production Flow
- Installing Beam Pumping Units
- Servicing as required after start of production

3-4-1 Conducting Drill Stem Test

To determine the potential of a formation, the operator may order a Drill Stem Test (DST). The DST crew sets up the test tool at the bottom of the drill stem, then lowers it to the bottom of the hole.

Weight applied to the test tool expands a hard rubber seal called a packer. Opening the tool ports allows the formation pressure to be tested. This process enables workers to determine the potential of the well.

3-4-2 Setting Production Casing

Production casing is the final casing in a well. It can be established from the bottom to the top of the well. Sometimes a production casing is installed. This casing is set in place in the same way as other casings, and then cemented in place.

3-4-3 Installing Production Tubing

A well is usually produced through tubing inserted down the production casing. Oil and gas are produced more effectively through this smaller-diameter tubing than through large-diameter production casing. Joints of tubing are connected to couplings to make up a tubing string. Tubing is run into the well in much the same way as casing, but tubing is smaller in diameter and is removable.

Drilling Operations

The steps for this activity are:

- Tubing elevators are used to lift tubing from the rack to the rig floor.
- The joint is stabbed into the string that is suspended in the well with air slips.
- Power tongs are used to make-up tubing.
- This process is repeated until tubing installation is complete.
- The tubing hanger is installed at the wellhead.

New technology allows tubing to be manufactured in a continuous coil, without joints. Coiled tubing is inserted into the well down the production casing without the need for tongs, slips, or elevators and takes considerably less time to run.

3-4-4 Starting Production Flow

Production flow is started by washing in the well and setting the packer. Washing refers to pumping water or brine (salt solution) into the well to flush out the drilling fluid. Usually this is enough to get the well flowing. If not, the well may need to be unloaded. This means swabbing the well to remove some of the brine. If this does not work, flow may alternatively be started by pumping high pressure gas into the well before installing the packer. If the well does not flow on its own, well stimulation or artificial lift may need to be applied.

3-4-5 Servicing

Servicing operations assume that the well has been completed and initial production has begun. All servicing activity requires specialized equipment. The equipment is transported to the well and rigged up.

Servicing is done by specialized crews and includes:

- Transporting Rig and Rigging Up
- General Servicing
- Special Services
- Workover

3-4-5-1 Transporting Rig and Rigging Up

Transporting and rigging up the equipment is the first step in well servicing operations. After these steps, servicing activities commence.

3-4-5-2 General Servicing

Wells often need maintenance or servicing of on-surface or down-hole equipment. Working on an existing well to restore or increase oil and gas production is an important part of today's petroleum industry.

A well that is not producing to its full potential may require service or workover.

3-4-5-3 Special Services

Special services are operations that use specialized equipment and workers who perform support well drilling and servicing operations. Coordination between all personnel is critical for onsite safety. Therefore, all special services operations should conduct a pre-job safety meeting that includes all personnel on the job site.

3-4-5-4 Workover

Workover activities include one or more of a variety of remedial operations on a producing well to try to increase production.

3-5 Oil Extraction

When oil reserves are first discovered and oil recovery begins, the work of most of the wells occurs due to the primary natural drive mechanisms: water, solution gas and gas cap drives helping to push the oil towards the well inlet and out. At the beginning, production rates usually start high and then drop off over time.

To achieve additional extraction, the secondary methods of oil recovery such as gas or water injection to stimulate the production have been perfected in the Danish part of the North Sea. In the first case gas is injected into the top of the reservoir creating a gas cap, which forces oil to the bottom. The pressure thus formed presses out the oil. In water flooding, water is introduced into another well site connected to the well being worked on. Water floods all the wells, forcing oil to the top, since oil floats on water. To the greatest extent possible already produced water is used for the water injection.

After application of primary and secondary methods of oil extraction, 60-70% of oil reserves remain in subsoil as an world average. By employing various techniques known as enhanced oil recovery (EOR), the life of an oil field can be increased and profits preserved.

EOR processes are divided into a few categories: thermal, gas, chemical, microbial and others. The processes are typically defined by the nature of their injected fluid.

Hot water and steam are applied in Thermal EOR methods mainly for heavy oils.

Gas EOR processes use different gases for the injection such as CO₂, flue gas, nitrogen or combinations of these. Dependent on pressure the gases are either immiscible or miscible with oil. In one case the

gas serves mainly as a driving mechanism. In a second one, gas and oil forms a single phase where the interface between two substances disappears. Such phase has lower viscosity and moves easier which facilitates the oil extraction. The pressure required for achieving dynamic miscibility with CO₂ is usually significantly lower than the natural gas, flue gas and nitrogen. This is a major advantage of the CO₂ miscible process because miscibility can be achieved at attainable pressures in a broad spectrum of reservoirs.

Chemical EOR processes uses polymers, alkalines and surfactant. Surfactants or soap-like substances are used ahead of the water and behind the oil. The substance forms a barrier around the oil, and water behind the substance pushes the oil to the surface. The soapy substance also ensures a complete collection of oil. Heat can also be used to get oil flowing. Up to a million times thicker than water, oil can be thinned by blasting steam into the reservoir.

Microbial Enhanced Oil Recovery (MEOR) applies the injecting into the oil-saturated layer of the exterior microbes and nutrients to create in-situ production of metabolic products or only nutrients to stimulate indigenous microbes. The purposes of MEOR are increase of oil production, decrease of water cut and prolongation of the productive life of the oil field. MEOR can be applied for heavy oil and paraffin removal from the tubing, to reduce sulphur corrosion. It is the cheapest method after water flooding method of oil recovery.

Other methods for enhancing the oil recovery include pumping acids into the field, hydrofracturing, horizontal drilling and some other. Given a high oil price and a stagnating production, it will be paramount for oil producing nations and for oil companies to increase the recovery rate from the existing oil fields, and hence the above techniques will be perfected and new innovative methods will henceforth be developed to recover more oil from existing fields.



Chapter 4

Offshore Structures

4-1 Overview

Offshore structures are large platforms that primarily provide the necessary facilities and equipment for exploration and production of oil and natural gas in a marine environment. During the initial prospecting phase, jack-up or alternatively floating rigs are used to drill exploration wells, and if the drilling operation proves successful, a permanent production platform may be placed at the site.

Initially the exploration well is drilled to determine, whether any oil or gas is present within a given area. In Denmark the drilling rig is typically of the jack-up type standing on the seabed, due to the relatively shallow Danish water depths of 35 to 70 m.

Once the decision to initiate an oil production has been taken, a production facility will be placed at the site. The platform may consist of 1 or several platforms, or 1 integrated production platform. Depending on the site, location and water depth, the production facilities are either floating platforms or platforms placed direct on the seabed. Generally, oil platforms are located in shallow waters on the continental shelf.

However, as the demand for oil and gas increases and reserves are found in increasingly deeper waters, facilities and equipment must be located either directly on the bottom of the sea or on floating vessels. A typical wellhead platform in the Danish North Sea is equipped with 12 - 24 wellheads, and in a few cases up to 30 - 40 wellheads.

Directional drilling allows the reservoirs to be accessed at different depths and at remote positions of up to 5 to 8 km from the platform. Many Danish platforms have satellite platforms tied-in by pipeline and power connections.

In Denmark the offshore production platforms mainly consist of medium-sized 4-legged steel production platforms, which often later during the life-time of the field are extended by small cost-effective mono-column platforms. Often these installations are the Danish developed STAR platform. Through simple and flexible design these platforms can easily be adapted for different application such as well-head, flare and accommodation platform.

Today, Maersk Oil and DONG Energy has installed several unmanned mono-tower structures, especially on smaller satellite fields. Unmanned platforms are cheaper and reduce operating costs and risk. Another advantage of the mono-tower is that it may be re-usable and therefore suitable to be installed on small marginal fields with rapid production decline.

The combination of horizontal wells and mono-tower platforms has reduced development costs considerably in the Danish oil and gas fields.

In general offshore structures may be used for a variety of reasons:

- Oil and gas exploration
- Production processing
- Accommodation
- Bridges and causeways
- Loading and off loading facilities

In the steel platform category, there are various types of structures, depending on the use, and depending on the water depth in which the platforms operate.

The development of offshore oil and gas fields has played an essential role in the total oil production worldwide, as oil prices in the 1970's and again from 2005 encouraged increased development in order to attain self sufficiency. The design of offshore structures used for oil and gas exploitation has evolved since then, with national and international standards and regulations assuring that all platforms are designed to withstand a certain wave and wind load and to a high safety level. In most cases platforms are designed to last 25-30 years with respect to material fatigue as well as to withstand impact with boats and dropped objects. Finally to ensure the safety and integrity of existing structures, advanced inspection, monitoring systems and advanced analysis have been activated.

As oil and gas reserves are being discovered in increasingly deeper waters, the technology needed to design and build deep ocean-compliant structures, continues to evolve.

Offshore structures are used worldwide for a variety of functions and in varying water depths and environments.

In the design and analysis of offshore platforms many factors, including the following critical loads, are taken into account:

- Environmental loads (wave and wind loads).
- Transportation and lifting loads.

In relation to dynamics and fatigue, offshore structures are designed with maximum load occurrence frequencies taking into account both 50- and 100-year wave and weather scenarios, so that a maximum level of safety is reached.

Placing heavy structures on the seabed also requires a thorough investigation of the soil-characteristics, as well as whether it should be piled or gravity based.

4-2 Platform Types

Larger offshore oil and gas platforms are some of the largest moveable man-made structures in the world. There are many different types of platforms:

4-2-1 Stationary Platforms

A typical platform consists of different elements as shown in the following figure:

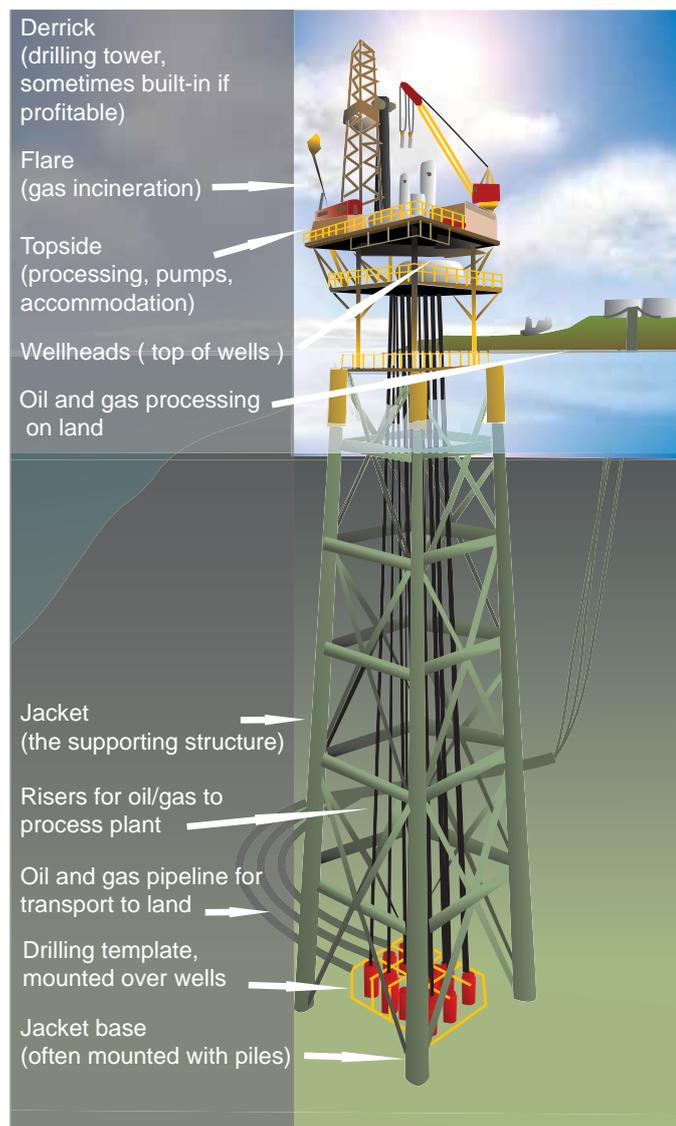


Figure 4.1 - Offshore Platform.

Most platforms, including the Danish platforms, are made of steel and fixed to the bottom by piles driven into the seabed.

A small number of platforms are made of concrete and placed direct on the seabed using gravity. Siri and South Arne platforms in the Danish North Sea as well as many of the Norwegian platforms are examples of gravity-based platforms.

4-2-1-1

Jacket Platforms

The traditional Danish platforms are of the jacket type consisting of 4 to 8 legs connected by tubular bracing members. The jackets are fixed to the seabed by piles driven some 50 m into the seabed.

4-2-1-2

STAR Platforms

A good example of superb Danish offshore innovation entrepreneurship is the remotely operated unmanned mono-column satellite platform, widely used in the Danish part of the North Sea – the STAR platform (Slim Tripod Adapted for Rigs).



Figure 4.2 – Jacket.

In the continuing effort to reduce overall costs and keep the operational costs of oil and gas production at a minimum, especially for small marginal fields, several alternatives have been developed by the Danish operators in the North Sea. Especially Maersk Oil has been at the forefront in this technology, and with international recognition from major oil and gas operators worldwide. DONG Energy has also been active in this area.



Figure 4.3 – STAR Platform.

The tripod satellite platform is basically a light-weight 3-legged sub-structure, with minimum topside facilities cf. the figure 4.3

The platform is designed for unmanned operation with all power and shutdown operations controlled remotely by radio signals from the main platform, thus ensuring a low-cost and safe operation.

Also installation of the particular tripod platform used in the Danish part of the North Sea is done in a very cost-effective way, allowing for installation by a medium sized drilling rig in connection with drilling of the wells. Crane barges can be scarcely available; hence the installation by the drilling rig is a very cost-effective alternative. The jacket construction is shown in figure 4.5.

4-2-1-3 Compliant Towers

Compliant towers consist of a narrow, flexible tower and a piled foundation supporting a conventional deck for drilling and production operations. Compliant towers are designed to adapt significant lateral deflection and to withstand significant lateral forces and are typically used in water depths of 120 to 500 m.



Figure 4.5 – STAR Jacket.

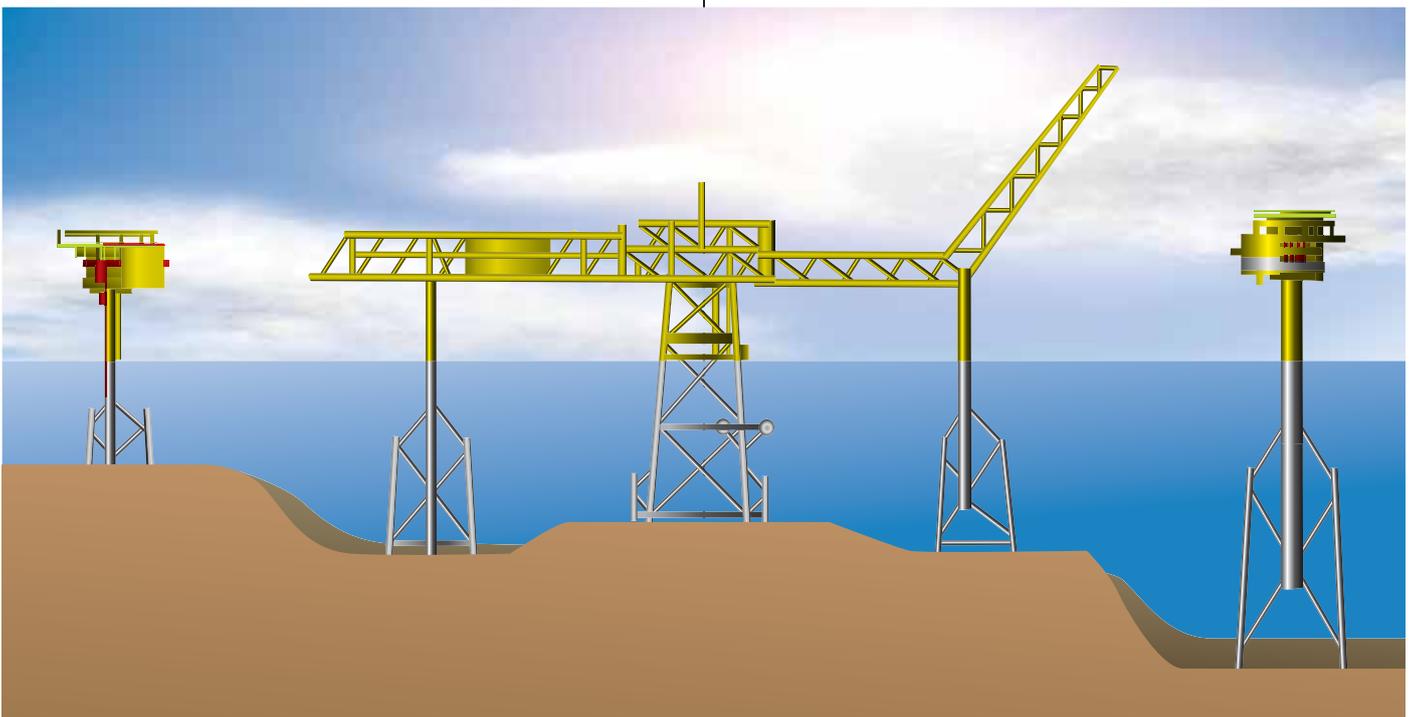


Figure 4.4 – Platform Types.

Source: Ramboll

Offshore Structures

4-2-1-4 Semi-submersible Platforms

These platforms are characterized by having legs of sufficient buoyancy to enable the structure to float, and a sufficient weight to keep the structure stable. Semi-submersible rigs can be moved from place to place and can be ballasted or de-ballasted by altering the amount of flooding in buoyancy tanks. They are generally anchored by chain anchors during drilling operations, though they can also be kept in place using dynamic positioning. Semi-submersible platforms are used in depths from 180 to 1,800 m..



Figure 4.6 – Semi-submersible Platform.

4-2-1-5

Tension-leg Platforms TLPs

These platforms consist of floating rigs fixed to the seabed by pre-tensioned tethers in a way that virtually eliminates all vertical movement of the structure. TLPs are used in water depths of up to about 2 km. The “conventional” TLP is a 4-column design which looks similar to a semi-submersible. Mini TLPs can be used as utility, satellite or early production platforms for larger deep water sites.

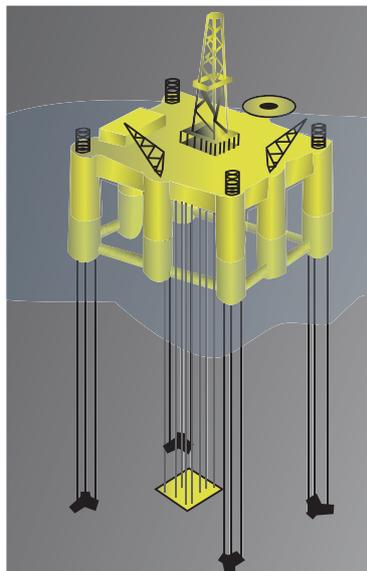


Figure 4.7 – Tension leg platform.

4-2-1-6 Spar Platforms

Spar platforms are also moored to the seabed like the TLP. But whereas TLPs have vertical tensioned tethers, the Spar has more conventional mooring lines. Spars have been designed in 3 configurations: the “conventional” one-piece cylindrical hull, the “truss spar” where the midsection is composed of truss elements connecting the upper buoyant hull (called a hard tank) with the bottom soft tank containing permanent ballast, and the “cell spar” built from multiple vertical cylinders. The Spar may be more economical to build for small and medium sized reservoirs than the TLP.

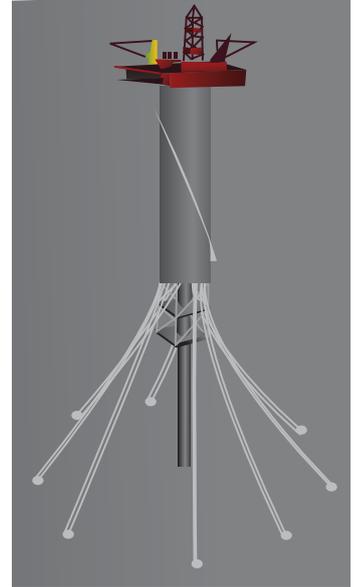


Figure 4.8 – Spar Platform.

4-3 Jack-up Platforms

As the name suggests these platforms can be jacked up above the sea level using legs which are lowered to the sea bottom. These platforms, used in relatively shallow waters mainly for exploration purposes in the North Sea, are designed to move from site to site.

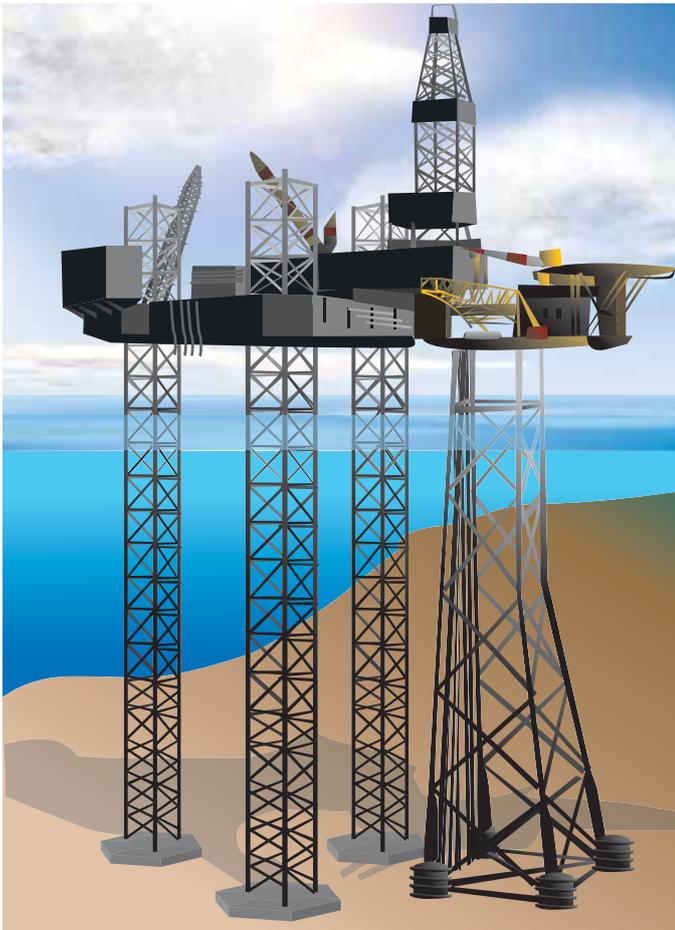


Figure 4.9 – Jack-up Platform standing next to a stationary platform.

4-4 Floating Production Systems

Floating Production Systems are large vessels or ships often equipped with processing facilities and moored to the location for a shorter or longer period of time. The main types of floating production systems are FPSO's (Floating Production, Storage, and Offloading system), FSO (Floating Storage and Offloading system), and FSU (Floating Storage Unit).

The key feature of the ship-shaped FPSO is the mooring turret and the fluid transfer system. The vessel is anchored to the seabed via the turret which allows it to weathervane on a bearing assembly. The well fluids from the subsea wells are routed through flexible riser pipelines to the production facilities of the vessel which are constantly changing position relative to the turret because of the weather vaning characteristics. The fluid transfer system has to accommodate this misalignment.

The processing facilities are arranged in a number of modules and pipe racks and positioned on the deck of the ship typically on bearings to allow for ship deformations.

Figure 4.10 – FPSO for Nexus project (copyright Ramboll Oil & Gas)



4-5 Subsea Production Systems

Subsea systems are becoming increasingly important facilities in the production of oil and gas, as water depths and distance of wells from the production infrastructure increase.

During the past 4 decades, subsea well-completion technology has evolved. From simply being an untested engineering theory it has contributed to the production of viable, field-proven equipment and techniques that are accepted by the petroleum industry and governments of producing countries. In the 4 decades since the first systems were installed, more than 1,000 subsea wells have been completed worldwide. 2/3 of these are still in service. These completions come under a variety of configurations that include single-satellite wells, which employ subsea trees on an individual guide base, subsea trees on steel-template structures with production manifolds and clustered well systems, e.g. single-satellite wells connected to a nearby subsea production manifold. All of these configurations are usually connected to platforms, floating production and storage vessels, or even to the shore.

Also in the mature North Sea region, this development continues to break new technological ground. In the Danish part of the North Sea, 3 subsea production installations are operating. The first one was the Maersk Oil operated Regnar field, put on stream in 1993. Regnar is a so-called marginal oil field with an expected production of 525,000 m³ of oil in total. This makes it unfeasible to install a traditional

production platform, so alternatively it was decided to produce from a subsea wellhead. The wellhead is located on 45 m of water and is connected to the Dan FA platform via 13 km pipeline. In addition to Regnar, DONG Energy is operating 2 subsea wellheads in the Stine Segment 1 field.

Besides from wellheads, subsea installations include other technologies as well. Service providers are seeing more and more orders for their technologies, as operators are faced with placing more of their wellhead and production systems on the sea floor.

4-5-1 Examples of subsea technology in Denmark

The South Arne field operated by Hess Denmark has an integrated oil platform which processes the oil and gas produced. A subsea oil tank stores the oil until a shuttle oil tanker pumps the oil to its tanks via an offshore loading system.

DONG Energy operates 3 fields Siri, Nini, and Cecilie with sub-sea tie-ins of oil and gas production pipes from Nini and Cecilie to a subsea oil tank at the base of the Siri platform.

Also being a part-owner of the enormous Norwegian gas field Ormen Lange, a massive built-up of subsea knowledge has occurred within DONG Energy during the past years.

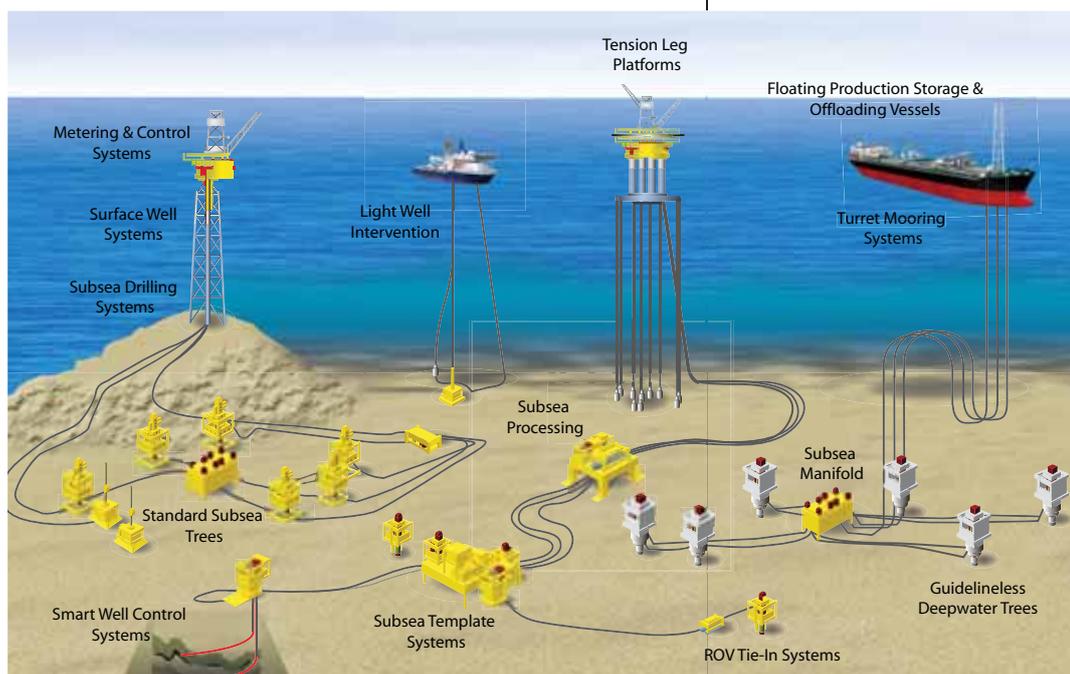


Figure 4.11 – Subsea installations.

Most Danish subsea technology however lies within Maersk Oil. Some main examples are:

- The Tyra West gas export pipeline pumping gas over a 100 km sub-sea pipeline to the NAM operated F3-FB platform in the Netherlands.
- Over 200 km subsea pipeline pumping produced oil from the Gorm platform to the onland Filsø pumping station and onwards to Shell's Fredericia refinery.
- The Tyra West gas subsea pipeline to DONG's Nybro gas treatment plant. The pipeline is 230 km long.
- Further to this is a complex grid of interfield pipelines.

In addition Hess Denmark operates the field Syd-Arne connecting a 300 km subsea gas pipeline to the gas treatment plant in Nybro.

4-6 Halfdan including Sif and Igor

The next chapters give examples of Danish offshore installations.



Figure 4.12 - The Halfdan field.

4-6-1 Exploration

Halfdan, operated by Maersk Oil, is located in the Danish sector of the North Sea, in blocks DK 5505/13 and 5504/16. The field discovery was made in 1999, and the field was brought on stream in the same year, in an extremely rapid development. Halfdan has proven itself a very valuable field in what was hereto thought as a mature Danish basin. The water depth is 40-50 m.

Halfdan quickly grew in the early 2000's to become the largest Danish oil field by 2006.

4-6-2 Production Strategy

The recovery of oil from the Halfdan field is based on pressure support from water injection. In the southern and western parts of the accumulation, the oil wells are arranged in a pattern of alternate production and injection wells with parallel well trajectories, about 180 m apart. The injection wells are stimulated with acid, which makes it possible to inject large volumes of water.

Offshore Structures

The regular spacing of the wells optimizes the flooding of the reservoir, thus enhancing recovery. The injection wells are used for production for a period of time before being converted to water injection.

4-6-3 Production Facilities

The Halfdan Field comprises a combined wellhead and processing platform, HDA, one accommodation platform, HDB, one gas flare stack, HDC, and an unmanned satellite wellhead platform, HBA, without a helideck. The HBA satellite platform is located about 2 km from the other Halfdan platforms which provide it with electricity, injection water and lift gas. The Halfdan Field receives production from Sif and Igor through special installations on the HBA platform.

Production from the oil wells is conveyed through a multiphase pipeline for processing at the HDA platform, while production from the Sif and Igor gas wells is separated by a 2-phase separator into a liquid and a gas flow. The liquid is piped through the multiphase pipeline to the HDA platform for processing. After separation at the HDA platform, the oil/condensate is transported to Gorm for final processing and export ashore.

Halfdan HDC and Tyra West are interconnected by a gas pipeline that is hooked up via a riser to the gas installations at the Halfdan HBA platform. Gas pipelines also connect Halfdan HDA and Dan.

The gas from the Sif/Igor installations at the HBA platform is conveyed to Tyra West, while the gas from Halfdan HDA is transported to Dan for export ashore via Tyra East or to Tyra West via Halfdan HBA for export to the Netherlands through the NOGAT pipeline. The Dan installations supply the Halfdan Field with injection water. Treated production water from Halfdan and Sif/Igor is discharged into the sea. The Halfdan HDB platform has accommodation facilities for 32 persons.

4-6-4 Further Development of the Halfdan Field

In 2007, Maersk Oil applied for approval regarding further development of the Halfdan field expanding the well pattern with parallel oil producers and water injectors to the north east. The wells were drilled from the new Halfdan HBB platform.

Furthermore a new process platform is planned with 3-phase separation, water disposal and gas compression. The new platform, HBD, will be bridge linked to the existing Halfdan HBA platform, converting it into a manned platform.

4-7 Siri, North Sea, Denmark

Siri, operated by DONG Energy, is located in block 5604/20 in the north-western part of the Danish sector of the North Sea, about 220 km from the coast. The reservoir lies at a depth of 2,070 m below sea level in Palaeocene sandstone and has recoverable reserves of 1.8 million m³ (January 2008).



Figure 4.13 – The Siri Installation.

4-7-1 Development

In 1996, the contract was made for the purpose-built 3-legged fully integrated jack-up platform design containing wellheads, processing equipment and living quarters. The platform is placed on top of a steel storage tank.

The project cost of the Siri platform and offloading system (excluding drilling) was just over a quarter of a billion €. The operational life of Siri was estimated to be about ten years, but has since been extended to 20 years following the encouraging results in the first years of production.

4-7-2 Jacket

The platform's tubular legs are 104 m long, have an outer diameter of 3.5 m and weigh 800 t each, with a wall thickness of 65 mm to 110 mm.

The upper parts of the legs have 460 mm-diameter jacking holes spaced 1,750 mm apart. The legs are penetrated into 13 m-deep sleeves in the steel tank structure.

4-7-3 Hull

The dimensions of the hull are 50 x 60 m and 6.7 m in height. The topsides equipment is enclosed in small 500-t modules, while the hull itself contains diesel and water storage, electrical rooms, general storage, ventilation and communication rooms.

The living quarters are cantilevered 7 m, on the opposite side of the platform. During normal operations, 21 people man the platform. The living quarters can accommodate 60 persons in single cabins. They mainly provide maintenance and well workover operations.

4-7-4 Tank

The tank dimensions are 50 x 66 m and 17.5 m in height. It has an effective storage volume of 50,000 m³. The base of the tank includes skirts of 1.6 m and 2 m in depth that divide the underside of the tank into compartments.

Internally, the tank consists of a main tank and 3 separate buoyancy compartments, located around the leg sleeves. These were used to provide tilt and depth control during the lowering of the tank to the seabed. Stability was assisted by 5,000 t of concrete ballast placed at the bottom of the tank.

4-7-5 Flare Tower

The flare tower is located in one corner of the platform. Its height (96 m) is dictated by its closeness to a possible drilling rig to avoid heat radiation.

4-8 South Arne, North Sea, Denmark

South Arne, operated by Hess Denmark, is located in the Danish sector of the North Sea, in block DK 5604/29. In late 1994 Hess Denmark became the operator of the 7/89 license, containing the South Arne field. The RIGS-1 well was spudded (the initial operations for the well drilling) in December 1994. The results of this work program led the license partners to declare the South Arne field commercial in April 1996. The water depth here is 60 m.

An appraisal well was spudded in 1996 with further drilling in the following years.



Figure 4.14 – The South Arne platform during installation.

4-8-1 Production Drilling

The field-development schedule was organized to ensure that a sufficient number of wells were drilled, prior to the installation of facilities, allowing the platform to operate at full capacity from the first day.

4-8-2 Construction

The South Arne platform sits on a concrete tank, being used to store oil. The concrete gravity oil storage base concept was selected, as the capacity of the Danish oil line to Fredericia was insufficient. A floating storage system was largely ruled out by the relatively shallow depth of 60 m and associated problems with risers and anchoring systems.

Offshore Structures

relatively shallow depth of 60 m and associated problems with risers and anchoring systems.

The oil storage tank measures 110 x 90 m and is 18 m high. It houses up to 88,000 m³ in its 100 individual cells.

The platform represents in Denmark an unusual design, as the topsides are supported on the GBS (Gravity Base Structure) by a concrete tower and a steel lattice drilling tower/conductor frame.

The design was intended to save cost and shorten the fabrication.

The concrete leg is 18 m in diameter and 60 m tall. Altogether, the tank and legs weigh 100,000 t.

4-8-3 Process Platform Topsides

The design specified topsides which would be capable of processing nearly 8,000 m³ of oil and 2 million m³ of gas per day.

The South Arne topsides weigh 7,900 t. The production facilities include a single 3-stage separator train and a single 4-stage compression system. Power is provided by two 24 MW GT 10 turbines (GT = Gas Turbine).

The flare is 80 m high and the total structure, when measured from the seabed, is 177 m high.

The platform has an air gap of 23 m. The accommodation system can house 57 men in single cabins.

4-8-4 Export System

The oil-export system consists of a 2 km export line, attached to a single anchor leg mooring system.



Chapter 5

Production of Oil and Gas

5-1 How are Oil and Natural Gas produced?

Before a well can produce oil or gas, the borehole must be stabilized with casing, which is a length of pipe cemented in place. A small-diameter tubing string is centered in the well bore and held in place with packers. It enables the hydrocarbons to be brought from the reservoir to the surface.

Due to underground forces reservoirs typically have an elevated pressure. To equalize the pressure and avoid blowouts of oil and gas, a series of valves and equipment are installed at the top of the well. This “Christmas tree”, as it is sometimes called, regulates the flow of hydrocarbons out of the well.

Early in its production life, underground pressure often pushes the hydrocarbons all the way up the well bore to the surface like a carbonated soft drink that has been shaken. Depending on reservoir conditions, this “natural flow” may continue for many years. When the pressure differential is insufficient for the oil to flow naturally, artificial lift may be used to bring the oil up to the surface. The offshore most common process is the artificial lift by means of gas lift.

As a field ages, the company may choose one of the production recovery techniques, where an external fluid such as water or gas is injected into the reservoir through injection wells. Usually the injection wells are wells in the field that are converted from production wells to injection wells.

In the so-called “waterflooding” technique, some of these wells are used to inject water (often produced water from the field) into the reservoir. This water tends to push the oil out of the pores in the rock toward the producing well. Waterflooding will often increase production from a field.

In the second production recovery technique, some of or all gas from the production wells (or imported from another platform) may be re-injected into the reservoir (the gas cap) through the gas injection wells to sustain a high reservoir pressure.

In more advanced cases, the company may use more sophisticated techniques, collectively referred to as Enhanced Oil Recovery (EOR). Depending on reservoir conditions, various substances may be in-

jected into the reservoir to extract more oil from the pore spaces and increase production. These substances can be steam, nitrogen, carbon dioxide or surfactants (soap).

Throughout their productive life, most oil wells produce oil, gas, and water. This mixture is separated at the surface. Initially, the mixture coming from the reservoir may be mostly oil with a small amount of water. Over time, the proportion of water increases and it may be re-injected into the reservoir either as part of a water flooding project or for disposal. In the latter case the water is returned to the subsurface. Natural gas wells do not usually produce oil, but occasionally produce a small amount of liquid hydrocarbons.

These natural gas liquids are removed in the field or at a gas processing plant that removes other impurities as well. Natural gas liquids often have significant value as raw material for the petrochemical industry. These wells often produce water as well, but volumes are much lower when compared to oil wells.

Once produced, oil may be stored in a tank and later transported by ship to a site where it will be sold or enter the transportation system. More often, however, it goes from the separation facilities at the well-head direct into a small pipeline and from there into a larger one.

Pipelines are frequently used to bring production from offshore wells to shore. They may also transfer oil from a producing field to a tanker loading area for shipping or from a port area to a refinery to be processed into petrol, diesel fuel, jet fuel, and many other products.

Natural gas is almost always transported through pipelines. Because of difficulties in transferring it from where it is found to where potential consumers are, any known gas deposits are not currently being produced. Years ago, the gas would have been wasted (flared) as an unwanted by-product of oil production. However, now industry recognizes the value of clean-burning natural gas and is working on improved technologies to get it from the reservoir to the consumer.

Once the individual well streams are brought into the main production facilities over a network of gathering pipelines and manifold systems, another phase of the production process will start. Some of the main offshore installations and processes are summarised in figure 5.1 (next page):

Production of Oil and Gas

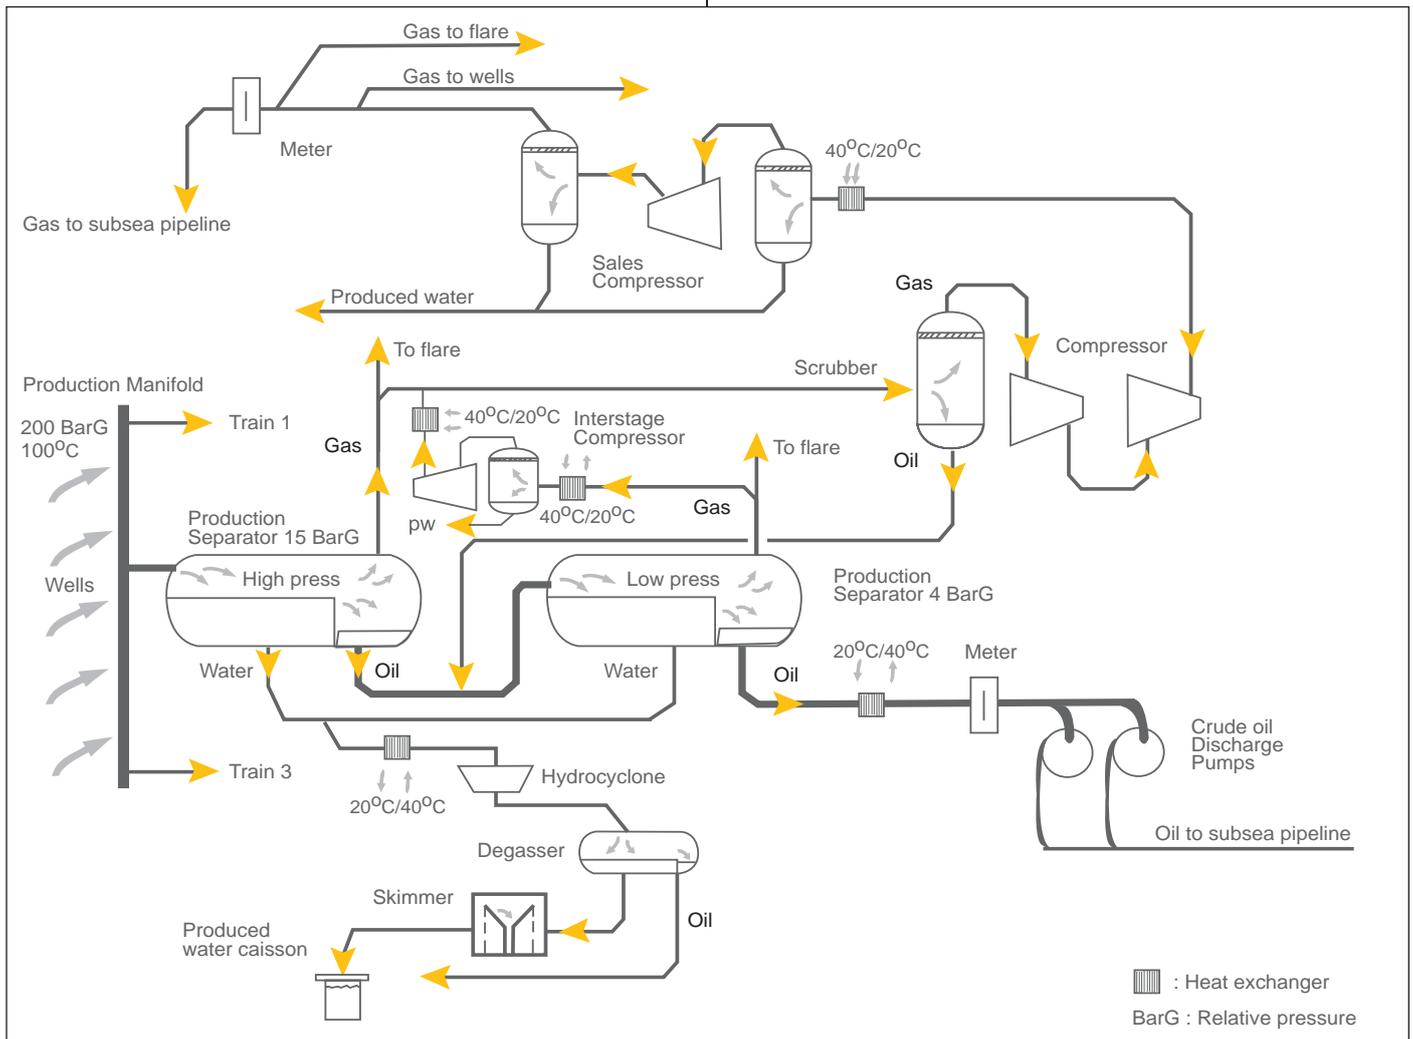


Figure 5.1 – Process Diagram.

5-2-1 Separation Process

Crude oil usually consists of different components in 2 or 3 different phases, namely liquid, gas and solid. The industry uses several separation mechanisms, such as separation utilizing by gravity or centrifugal forces as well as electric and/or magnetic fields, to separate these from one another. Separation by gravity is mostly used in the petroleum industry to separate crude oil into oil, water and gas.

Separators with different configurations such as vertical, horizontal and/or spherical are used in this type of separation. The purpose is to separate gas from liquid with a minimum of liquid transfer in the gas stream or liquid from gas with a minimum of gas bubbles entrapped in the liquid. The oil and gas treatment industry requires a combination of the above, meaning that the gas separated has to be free of any water and oil, and the oil separated, free from any water and gas.

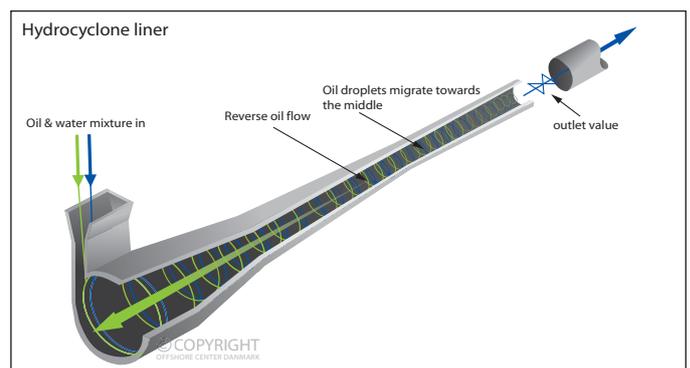


Figure 5.2 – Cyclone.

Cyclones, the principal type of gas-solids separators, using centrifugal force, are widely used. They are basically simple in construction and can be operated at high temperatures and pressures. Hydro-cyclones are used for liquid-liquid separation. It is a centrifugal device with a stationary wall, the centrifugal force being generated by the movement of the liquid. It is suitable in waste water treatment.

The water treatment unit includes a degassing vessel, used to remove gas from water, as gas bubbles can carry some of the remaining oil from the water.

5-2-1-1 Separator

A separator is a vessel used in the field to remove well-stream liquid(s) from gas components. The separator may be either 2-phase or 3-phase. 2-phase separators remove the totality of the liquid from the gas, while 3-phase separators in addition remove free water from the hydrocarbon liquid.



Figure 5.3 – Separator.

An oil and gas separator generally includes the following essential components and features:

1. A vessel that includes
 - Primary separation device and/or section
 - Secondary “gravity” settling (separating) section
 - Mist extractor to remove small liquid particles from the gas
 - Gas outlet
 - Liquid settling(separating) section to remove gas or vapor from oil (on a 3-phase unit, this section also separates water from oil)
 - Oil outlet
 - Water outlet (3-phase unit)
2. Adequate volumetric liquid capacity to handle liquid surges (slugs) from the wells and/or flow lines.
3. Adequate vessel diameter and height or length to allow most of the liquid to separate from the gas so that the mist extractor will not be flooded.
4. A way of controlling an oil level in the separator which usually includes a liquid-level controller and a diaphragm motor valve on the oil outlet. For 3-phase operation, the separator must include an oil/water interface liquid-level controller and a water-discharge control valve.
5. A backpressure valve on the gas outlet to maintain a steady pressure in the vessel.
6. Pressure relief devices.

In most oil and gas surface production equipment systems, the oil and gas separator is the first vessel the well fluid flows through after it leaves the producing well. However, other equipment – such as heaters and water knockouts - may be installed upstream of the separator.

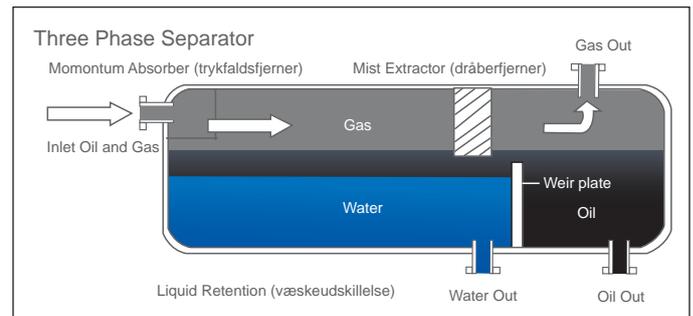


Figure 5.4 – Three Phase Separator.

5-2-1-2 Scrubber

A scrubber is a type of separator that has been designed to handle flow streams with unusually high gas-to-liquid ratios.

These are commonly used in conjunction with dehydrators, extraction plants, instruments, or compressors as protection from entrained liquids.

5-2-1-3 Knockout

A knockout is a type of separator falling into 1 of 2 categories: free water or total liquid knockouts.

- The free water knockout is a vessel used to separate free water from a flow stream of gas, oil, and water. The gas and oil usually leave the vessel through the same outlet to be processed by other equipment. Water is removed for disposal.



Figure 5.5 – Scrubber.

5-3 Pumping Equipment for Liquids

As already indicated, the liquids used in the chemical industries differ considerably in their physical and chemical properties, so it has been necessary to develop a wide variety of pumping equipment to deal with these differences.

Pumps are used to transfer fluids from one location to another. The pump accomplishes this transfer by increasing the pressure of the fluid and thereby supplying the driving force necessary for flow.

Power must be delivered to the pump from an external source. Thus, electrical or steam energy can be transformed into mechanical energy which is then used to drive the pump. Most of the mechanical energy is added to the fluid as work energy, and the rest is lost as friction due to inefficiency of the pump and the drive.

Pump selection is made on the flow rate and head required, together with other process considerations, such as corrosion or the presence of solid in the fluid. The selection of the pump cannot be separated from the design of the complete piping system; for example, the total head required will be the sum of the dynamic head due to friction losses in the piping, fittings, valves and process equipment, and any static head due to differences in elevation.

Cost and mechanical efficiency of the pump must be considered in relation to one another, so it may be advantageous to select a cheap pump and pay higher replacement or maintenance costs rather than to install a very expensive pump of high efficiency.

5-3-1 Types of Pumps

Selection of a pump for a specific service requires knowledge of the liquid to be handled, the total dynamic head required, the suction and discharge heads, and in most cases, the temperature, viscosity, vapor pressure and density of the fluid. Special attention will need to be given to those cases where the liquid contains solids.

Pumps fall into 3 categories: positive displacement, kinetic (centrifugal), and jet (eductor), their names describing the method by which liquid is displaced.

A positive displacement pump causes a fluid to move by trapping a fixed volume of the fluid and then forcing (displacing) that trapped volume into the receiving pipe. Positive displacement pumps can be further classified as either rotary (for example the rotary vane pump) or reciprocating (for example the diaphragm pump).

A centrifugal pump causes a fluid to move by transferring the kinetic (rotational) energy from a motor (through an impeller) into water pressure (potential energy).

An eductor-jet pump is a special type of pump without moving parts that uses the kinetic energy of a fluid to increase the pressure of a second fluid.

5-3-2 Cavitation

Cavitation is a common occurrence but is the least understood of all pumping problems. A pump is cavitating if knocking noises and vibrations can be heard when it is operating. The noise and vibration are caused by vapor 'bubbles' collapsing when the liquid 'boils'.

Other signs of cavitation are erratic power consumption and fluctuation or reduction in output.

If the pump continues to operate while it is cavitating, it will be damaged. Impeller surfaces and pump bowls will pit and wear, eventually leading to mechanical destruction. On entering a pump, a liquid increases its velocity causing a reduction in pressure within the pumping unit. If this pressure gets too low, the liquid will vaporize, forming bubbles entrained in the liquid. These bubbles collapse violently as they move to areas of higher pressure. This is cavitation.

The pressure required to operate a pump satisfactorily and avoid cavitation is called net positive suction head (NPSH). The head available at the pump inlet should therefore exceed the required NPSH.

This is specified by the pump manufacturer and is a function of the pump design. As this problem relates only to the suction side of the pump, all prevention measures should be directed towards this area, and suction lifts that are too high should be avoided. As a general rule centrifugal pumps located less than 4 m above the liquid level do not experience cavitation. The following guidelines should be applied so as to overcome the problem:

- Avoid unnecessary valves and bends in the suction pipe.
- Avoid long suction lines.
- Keep the suction pipe at least as large in diameter as the pump inlet connection.
- Use long radius bends.
- Increase the size of valves and pipe work to avoid air intake into the suction line.
- Ensure adequate submergence over the foot valve. The submergence should be at least 5.3 times the suction line diameter.

A possible solution would be to reduce the required net positive suction head. This can be done by lowering the pump speed. However, this will also result in reduced output from the pump which may not suit the system.

5-4 Compressor

A compressor is a device that transfers energy to a gaseous fluid, the purpose being to raise the pressure of the fluid e.g. where it is the prime mover of the fluid through the process.

Compressors are driven by gas turbines or electrical motors. Often several stages in the same train are driven by the same motor or turbine.

The main purposes of gas compression offshore are for:

- Gas export
- Gas injection to well
- Gas lift
- Fuel gas

The compression process includes a large section of associated equipments such as scrubbers (removing liquid droplets), heat exchangers and lube oil treatment etc.

Several types of compressors are used for gas compression, each with different characteristics such as operating power, speed, pressure and volume. The most basic and well-known types of compressors are the positive displacement and the dynamics compressors.

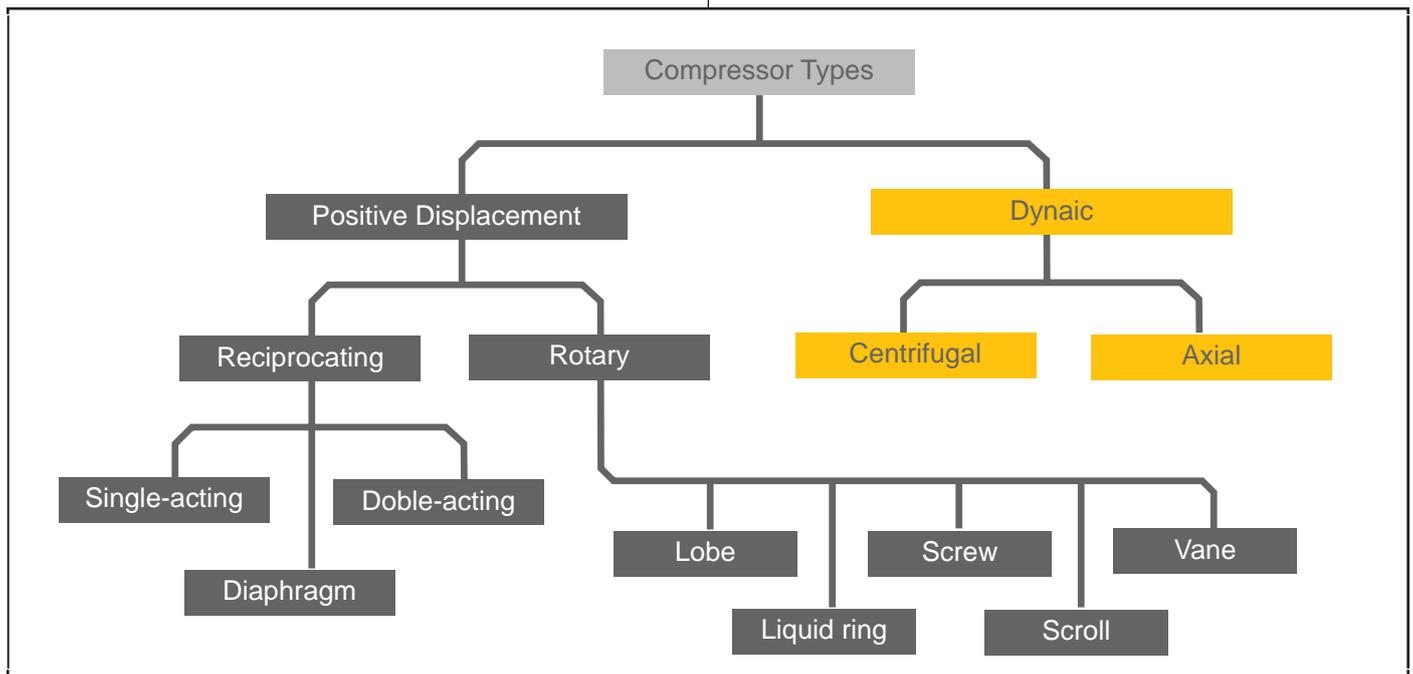


Figure 5.6 - Compressor types

Production of Oil and Gas

5-4-1 Positive Displacement Compressors

Positive displacement compressors function by trapping a volume of gas and reducing that volume as in the common bicycle pump.

The general characteristics of this compressor are constant flow and variable pressure ratio (for a given speed). Positive displacement compressors include:

- Rotary compressors
- Reciprocating compressors

Rotary compressors can be used for discharge pressure up (not limited) to about 25 bars. These include sliding-vane, screw-type, and liquid-piston compressors. For high to very high discharge pressures and modest flow rates, reciprocating compressors are more commonly used. These machines operate mechanically in the same way as reciprocating pumps, the differences being that leak prevention is more difficult and the increase in temperature is important. The cylinder walls and heads are cored for cooling jackets using water or refrigerant.

Reciprocating compressors can be used over a wide range of pressures and capacities. They are usually motor-driven and are nearly always double-acting. When the required compression ratio is greater than that to be achieved in one cylinder, multistage compressors are used. Between each stage there are coolers, tubular heat exchangers cooled by water or refrigerant. Intercoolers have sufficient heat-transfer capacity to bring the inter stage gas streams to the initial suction temperature. Often an aftercooler is used to cool the high-pressure gas in the final stage. One of the disadvantages, when using these units offshore, is the high level of noise and vibration.

5-4-2 Dynamic Compressors

The dynamic compressor depends on motion to transfer energy from compressor rotor to the process gas. The characteristics of compression vary depending on the type of dynamic compressor and on the type of gas being compressed. The flow is continuous. There are no valves, and there is no “containment” of the gas as in the positive displacement compressor. Compression depends on the dynamic interaction between the mechanism and the gas. Dynamic compressors include:

- Centrifugal compressors
- Axial flow compressors

Centrifugal compressors are multistage units containing a series of impellers on a single shaft rotating at high speeds in a massive casing.

Internal channels lead from the outlet of one impeller to the inlet of the next. The selection of a proper compressor depends on the required operating parameters which are mainly the flow, differential pressure and many other factors. Most compressors do not cover the full pressure range in a single stage efficiently. The discharge pressure depends on the system requirement that the compressed gas is utilized for. For example, the required gas to pipeline pressure is in the range of about 30-100 bar, while reservoir reinjection of gas will typically require higher pressure of about 200 bar and upwards. Therefore, the compression is normally divided into a number of stages; that is also to improve maintenance and availability. Inter stage cooling is needed on the high-pressure units.

Axial-flow machines handle even larger volumes of gas (up to 1,000,000 m³/h), but at lower pressures propel the gas axially from one set of vanes directly to the next.

5-5 Valves

Valves are the components in a fluid flow or pressure systems that regulate either the flow or the pressure of the fluid. Their duty may involve stopping and starting flow, controlling flow rate, diverting flow, preventing back flow, controlling pressure, or relieving pressure.

5-5-1 Manual Valves

Adjusting the position of the closure member in the valve may be done either manually or automatically.

Manual operation includes the operation of the valve by means of a manually controlled power operator. The manual valves discussed here are: the manually operated valves for stopping and starting flow, controlling flow rate, and diverting flow; and the automatically operated valves for preventing back flow and relieving pressure. The manually operated valves are referred to as manual valves, while valves for the prevention of back flow and the relief of pressure are referred to as check valves and pressure relief valves, respectively.

The way the closure member moves onto the seat gives a particular group or type of valve a typical flow-control characteristic. This flow control characteristic can be used to establish a preliminary chart for the selection of valves.

The many types of check valves are divided into several groups according to the way the closure member moves onto the seat. The basic duty of these valves is to prevent back flow.

Pressure relief valves are divided into 2 major groups: direct-acting pressure relief valves that are actuated direct by the pressure of the system fluid, and pilot-operated pressure relief valves in which a pilot controls the opening and closing of the main valve in response to the system pressure.

Direct-acting pressure may be provided with an auxiliary actuator that assists valve lift on valve opening and/or introduces a supplementary closing force on valve reseating. Lift assistance is intended to prevent valve chatter while supplementary valve loading is intended to reduce valve simmer. The auxiliary actuator is actuated by a foreign power source. Should the foreign power source fail, the valve will operate as a direct-acting pressure relief valve.

Pilot-operated pressure relief valves may be provided with a pilot that controls the opening and closing of the main valve direct by means of an internal mechanism. In an alternative type of pilot-operated pressure relief valve, the pilot controls the opening or closing of the main

valve indirect by means of the fluid being discharged from the pilot. Rupture discs are non-reclosing pressure relief devices that may be used alone or in conjunction with pressure relief valves. The principal types of rupture discs are forward domed types that fail in tension, and reverse buckling types that fail in compression. Of these types, reverse buckling discs can be manufactured to close burst tolerances. On the debit side, not all reverse buckling discs are suitable for relieving incompressible fluids.

5-5-2 Control valves

Control valves are valves used to control process conditions such as flow, pressure, temperature, and liquid level by fully or partially opening or closing in response to signals received from controllers that compare a "set point" to a "process variable" whose value is provided by sensors that monitor changes in such conditions.

The opening and/or closing of control valves is done by means of electrical, hydraulic or pneumatic systems. Positioners are used to control the opening or closing of the actuator based on electric or pneumatic signals. The most common signals for industry are 4-20 mA signals.

The most common and versatile types of control valves are sliding-stem globe and angle valves. Their popularity derives from rugged construction and the many options available that make them suitable for a variety of process applications, including severe service.



Figure 5.7 Globe control valve with pneumatic actuator and smart positioner

Production of Oil and Gas

Control valve bodies may be categorized as below: [Fisher, Control valve handbook, 4th ad.]

- Angle valves
 - Cage-style valve bodies
 - DiskStack style valve bodies
- Angle seat piston valves
- Globe valves
 - Single-port valve bodies
 - Balanced-plug cage-style valve bodies
 - High capacity, cage-guided valve bodies
 - Port-guided single-port valve bodies
 - Double-ported valve bodies
 - Three-way valve bodies
- Rotary valves
 - Butterfly valve bodies
 - V-notch ball control valve bodies
 - Eccentric-disk control valve bodies
 - Eccentric-plug control valve bodies

5-5-3 Definition

- Flow Coefficient (Cv)

It is often convenient to express the capacities and flow characteristics of control valves in terms of the flow coefficient Cv. The flow coefficient is based on the imperial units system and is defined as: the flow capacity of a valve in gal (U.S.)/min of water at a temperature of 60°F that will flow through a valve with a pressure loss of one pound per square inch at a specific opening position, as defined by the equation:

$$Cv = Q \left(\frac{G}{\Delta P} \right)^{1/2} \quad (\text{ISA standard})$$

Where:

Q = gal (U.S.)/min

G = specific gravity

ΔP = operating differential pressure in lb/in²

5-6 Heat Exchangers

The heat exchanger is one of the most important units in the oil industry. For safety reasons or to achieve a specific required operative condition (temperature) the fluid needs to be heated or cooled. It is also of great importance in achieving an optimal separation process. The fluid temperature must be fixed due to the thermodynamic calculation results to reduce fluid viscosity. The fluid itself needs to be cooled after the compressing process.

5-6-1 Selection

The selection process usually includes a number of factors, all of which are related to the heat transfer application. These factors include, but are not limited to, the items listed here:

- Thermal and hydraulic requirements
- Material compatibility
- Operational maintenance
- Environmental, health, and safety consideration and regulation
- Availability
- Expenses

Any heat exchanger selected must be able to provide a specified heat transfer, often between a fixed inlet and outlet temperature, while maintaining a pressure drop across the exchanger that is within the allowable limits dictated by process requirements or economy. The exchanger should be able to withstand stresses due to fluid pressure and temperature differences. The material or materials selected for the exchanger must be able to provide protection against excessive corrosion. The propensity for fouling (clogging) in the exchanger must be evaluated to assess the requirements for periodic cleaning.

The exchanger must meet all the safety codes. Potential toxicity levels of all fluids must be assessed and appropriate types of heat exchangers selected to eliminate or at least minimize human injury and environmental costs in the event of an accidental leak or failure of the exchanger. Finally, to meet construction deadlines and project budgets, the design engineer may have to select a heat exchanger based on a standard design used by the producer to attain these parameters.

5-6-2 Types

A typical heat exchanger, usually for high-pressure applications, is the shell-and-tube heat exchanger, consisting of a series of finned tubes, through which one of the fluids runs. The second fluid runs over the finned tubes to be heated or cooled.

Another type of heat exchanger is the plate heat exchanger. One section is composed of multiple, thin, slightly separated plates that have a very large surface area and the other of fluid flow passages which allows heat transfer. This stacked-plate arrangement can be more effective, in a given space, than the shell-and-tube heat exchanger. Advances in gasket and brazing technology have made the plate type heat exchanger increasingly practical. In HVAC (Heating, Ventilating, and Air Conditioning) applications, large heat exchangers of this type are called plate-and-frame; when used in open loops, these heat exchangers are normally of the gasketed type to allow periodic disassembly, cleaning, and inspection. There are many types of permanently-bonded plate heat exchangers such as dip-brazed and vacuum-brazed plate varieties, and they are often specified for closed-loop applications such as refrigeration. Plate heat exchangers also differ according to the types of plates used, and the configuration of these plates.

A third type of heat exchanger is the regenerative heat exchanger. In this type of exchanger, the heat from a process is used to warm the fluids to be used in the process, and the same type of fluid is used on both sides of the heat exchanger.

A fourth type of heat exchanger uses an intermediate fluid or solid store to hold heat which again is moved to the other side of the heat exchanger to be released. 2 examples of this are adiabatic wheels that consist of a large wheel with fine threads rotating through the hot and cold fluids, and heat exchangers with a gas passing upwards through a shower of fluid (often water) and the water then taken elsewhere before being cooled. This is commonly used for cooling gases whilst also removing certain impurities, solving 2 problems at the same time.

Another type of heat exchanger is called dynamic heat exchanger or scraped surface heat exchanger. This is mainly used for heating or cooling high viscosity products, in crystallization processes and in evaporation and high fouling applications. Long running times are achieved due to the continuous scraping of the surface, thus avoiding fouling and achieving a sustainable heat transfer rate during the process.

5-7 Control Systems and Safety

A control system is an interconnection of components forming a system configuration that will provide a desired system response. We need to control many parameters to get the required results. For this purpose we need to control pressure, temperature, flow and the level of the liquid inside the separators.

The process at the platform deals with high pressures, explosive gases, flammable liquids or oil that requires specific safety considerations. Due to these factors a good safety system needs to be installed to reduce hazards. The computerized emergency shutdown system (ESD) is the most important element in the safety system. Control, in one form or another, is an essential part of any industrial operation. In all processes it is necessary to keep flows, pressures, temperatures, compositions, etc. within certain limits for safety reasons or as a required specification. This is most often done by measuring the process/controlled variable, comparing it to the desired value (set point) for the controlled variable and adjusting another variable (manipulated variable) which has a direct effect on the controlled variable. This process is repeated until the desired value/set point has been obtained.

In order to design a system so that it operates not only automatically but also efficiently, it is necessary to obtain both steady and dynamic (unsteady) state relationships between the particular variables integrated. Automatic operation is highly desirable, as manual control would necessitate continuous monitoring of the controlled variable by a human operator.

5-7-1 Computer Control System

Supervisory Control and Data Acquisition, or SCADA control system is a computerized control system. It can control and monitor all the processes in a greater process such as an offshore platform. The SCADA control system is divided into two subsystems:

1. Process Control System, (PCS): This represents the main controlling computer that gets information from all the processes in operation on the platform. At the same time it will take appropriate action and intervene when necessary.

Units called Remote Terminal Units or (RTU's) are responsible for transferring the information (signals) between the PCS and the controlling and measuring equipment on the plant. The RTU's software contains a database, control functions, logic functions and alarm/event treatment.

2. Data Acquisition System, (DAS): It receives data coming from

Production of Oil and Gas

the process control system (PCS) and interprets it, so any developments (variations/discrepancies) in the system will be shown in the control room.

In both systems there is a master PCS/DAS and a slave PCS/DAS for back-up, so no data will be lost if the master fails.

There is also a report printer and an event printer in addition to a hard copy printer which is linked to all computers through a switchboard for printing visual displays, providing supervisors and operators with an overview of operations.

5-7-2 Safety

Health and safety are key elements of both the industry and working standards. Oil, gas and petroleum industries operate in dangerous environments and deal with hazardous products. It is therefore essential to ensure that workers within this industry are highly trained in dealing with health and safety issues, not only for their own protection, but also for protection of the general public and environment. Health and safety legislation also impose very strict standards of safety training.

For any operation in Denmark, offshore installations must be in possession of approvals and permits issued by the Danish Energy Agency. These include Operation Permit, Manning and Organisation Plan Approval and approval for the Contingency Plan.

To obtain an Operation Permit the safety and health conditions for the installation and the operational conditions (Safety and Health Review / Safety Case) and other relevant information regarding safety and health conditions (e.g. certificates) should be evaluated.

Offshore installations operating in Denmark must have a Safety Organisation in accordance with the relevant Danish regulations.

Usually regulations will require that safety representatives are elected for each work area on the installation. Safety representatives must - amongst others in safety groups and in the safety committee - co-operate with management representatives in order to ensure and improve safety and health conditions at the installation.

Participants in the Safety Organisation must be trained in accordance with specifications of the DEA.

All offshore installations operating in Denmark must also have a Work Place Assessment System (WPA). When developing and using the WPA system, management and safety representatives, amongst others in the Safety Committee, must cooperate. The WPA system must ensure that all workplaces and all work functions are mapped and evaluated with regard to potential improvements of the safety and health conditions and that relevant improvements are prioritised and implemented as planned.

Chapter 6

Pipelines

6-1 Introduction

Within industry, piping is defined as a system of pipes used to convey media from one location to another. The engineering discipline of piping design studies the best and most efficient way of transporting the medium to where it is needed. Piping design includes considerations of diameters, lengths, materials as well as in-line components (i.e. fittings, valves, and other devices). Further considerations must be given to instrumentation used for measurements and control of the pressure, flow rate, temperature and composition of the media. Piping systems are documented in Piping and Instrumentation Diagrams (P&ID's).

Industrial process piping and the accompanying in-line components can be manufactured from various materials such as glass, steel, aluminum, plastic and concrete. Some of the more exotic materials of construction are titanium, chrome-molybdenum and various steel alloys.

6-2 What is Piping?

The primary function of piping is to transport media from one location to another. Also in relation to piping, it is necessary to mention pressure vessels. Pressure vessels, in opposition to piping, are used mainly to store and process media. Piping can also be used as a pressure vessel, but transport is the primary function. In piping permitted stresses are categorized differently than those for pressure vessels. In piping one talks about sustained and expansion stresses, whereas in pressure vessels one talks about primary and secondary stresses. While the word "piping" generally speaking refers to in-plant piping such as process piping, which is used inside a plant facility, the word "pipe-line" refers to a pipe running over a long distance and transporting liquids or gases. Downstream pipelines often extend into process facilities (e.g. process plants and refineries).

It is important to distinguish between piping and pipelines since they usually are subjected to different codes. Eg. will a 3" ISO flange not fit on a 3" API Pipeline.



6-3 Piping Criteria

When analyzing piping mechanics, the following parameters need to be considered:

- The appropriate code that applies to the system.
- The design pressure and temperature.
- The type of material. This includes protecting the material from critical temperatures, either high or low.
- The pipe size and wall thickness.
- The piping geometry.
- The movement of anchors and restraints.
- The stresses permitted for the design conditions set by the appropriate code.
- The upper and lower limit values of forces and moments on equipment nozzles set by the standardization organizations or by the equipment manufacturers.

6-4 Flexibility and Stiffness of Piping

The concepts of flexibility and stiffness are two very important concepts in piping engineering. The two are mathematically opposites of one another, but in an application both must be understood.

The piping code refers to the subject of analysis of loading in piping systems as flexibility analysis. Flexibility is an easy concept for most, but stiffness is just as important a concept.

In practical terms, flexibility refers to the piping configuration being able to absorb a greater temperature range by using loops that allow the pipe to expand, resulting in lower stresses, forces, and moments in the system. Thus, making the piping system more flexible is a useful method of solving piping problems.

Stiffness is the amount of force or moment required to produce unit displacement, either linearly or via rotation, vibration or oscillation.

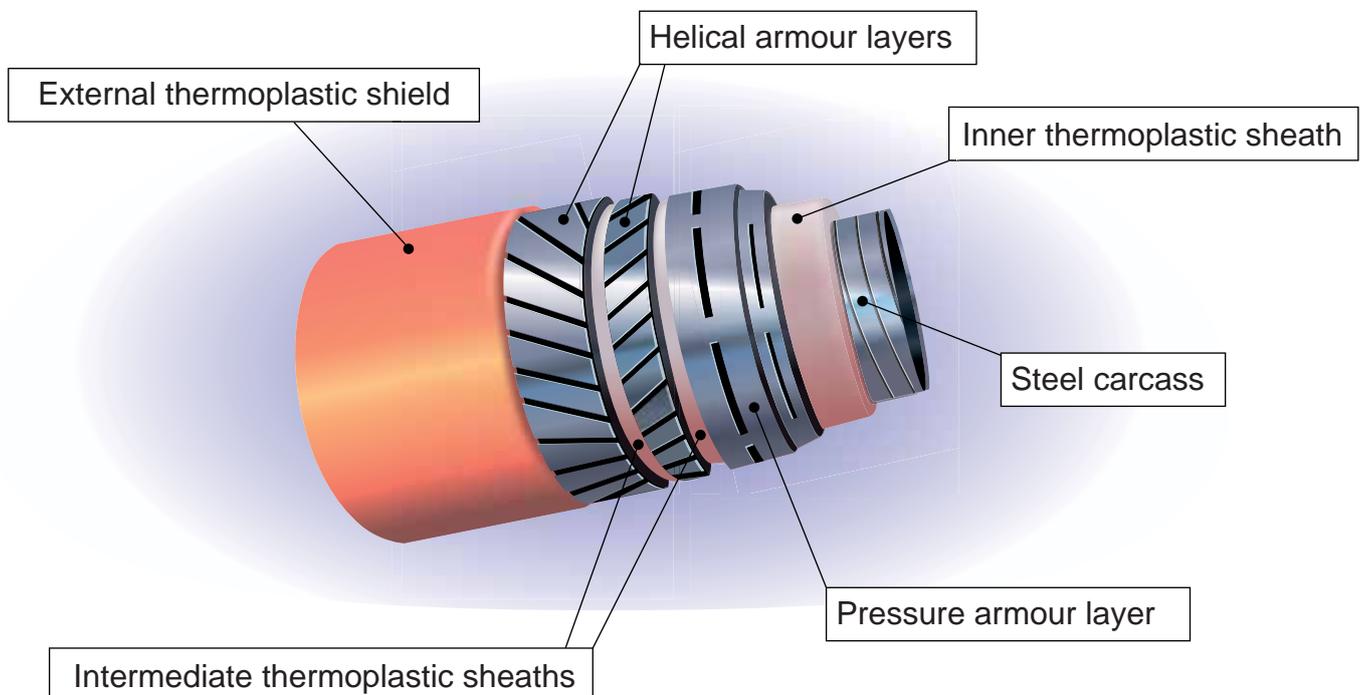


Figure 6.1 – Typical flexibles composition.

6-5 Flexible Pipes

Un-bonded flexible pipes are an alternative to rigid steel flow lines and risers. In particular, the use of flexible pipes in connection with a floating production system is an area that has been subject to rapid growth since the beginning of the 1990s.

The construction of a flexible is in discrete layers, each with particular function: A pressure sheath to offer corrosion resistance and to contain the fluid. A carcass which prevents collapse of the pressure sheath due to pressure build up in the windings. A pressure vault comprising an interlocking steel wire layer with a large helix angle to resist hoop stress. A torque balanced armor layer with low helix angle to offer impact resistance and resist tensile loads. And finally an external sheath to protect from surroundings.

A major advantage of using the flexible pipes is their ability to function under extreme dynamic conditions and their relatively good insulating and chemical compatibility properties when compared with rigid carbon steel pipes. Furthermore, flexible pipes are used as tie-in jumpers due to their ability to function as expansion spools, and the jumpers can be installed without carrying out a detailed metrology survey.

Flexible pipes are used for a multitude of applications, including production and export of hydrocarbon fluids, injection of water, gas and chemicals into an oil/gas reservoir, and service lines for wellheads. Flexible pipes can be manufactured in long continuous lengths.

Consequently, long flow lines can be installed without introducing intermediate joints, thus minimizing the risk of leaking flange connections. Flow lines with a continuous length of up to 8.5 km have been installed in the North Sea area.

All layers in the flexible pipes are terminated in an end fitting, which forms the transition between the pipe and the connector, e.g. a flange, clamp hub or weld joint. The end fitting is designed to secure each layer of the pipe fully so that the load transfer between the pipe and the connector is obtained.

6-6 Pipe Design Requirements

The primary function of a pipeline is to transport media safely and reliably for the duration of its life. The service conditions for pipelines are related to substances with elevated pressure, flowing at temperatures that will vary along the route from a typically high inlet temperature to temperatures that may be critically low. In gas pipelines low temperatures may cause the formation of hydrates, while in oil pipelines waxing and viscosity problems may arise.

The functional or operational requirements basically concern the operation of the pipeline. The requirements cover definitions of the system's ability to transport a specified media quantity within a specific temperature range. The requirements also relate to the service and maintenance of the pipeline system. Other requirements may arise from safety assessment or operator practice, and may imply the introduction of subsea isolation valves, monitoring systems, diver less access et al. Functional requirements also include the requirements facilitating inspection access, normally pig launchers and receivers.

For pipelines ending on manned platforms or terminals, integration with fire fighting and other safety systems falls under the heading of functional requirements.

6-6-1 Authorities Requirements

When drafting project parameters, including the basis for design, it is important to evaluate the time and effort required in dealing with the authorities. Obtaining approval from the relevant authorities could unless thoroughly planned prove critical to the overall contract schedule. Coupled with the sheer complexity of the approval procedures this can lead to less than optimum construction costs. The recommendation is to allow sufficient time and resources for authority engineering from the outset of the pre-engineering phase.

The authorities involved usually include energy agencies, naval authorities, environmental and natural resource agencies, health and safety bodies, work authorization authorities, and various regional and national nature protection agencies, particularly where landfill construction is included. For cross border projects, typically large gas transmission lines, the authorities' approval becomes increasingly complex.

Particular complications may arise during the approval process when other users of the sea claim that they will incur either temporary or, in some instances, permanent loss of income following the construction of pipeline. Authorities listen to the parties and usually secure due process. The interests of fishing organisations will often prove to be sensitive areas to take into account.

Pipelines

There are regional differences, and therefore conditions at the location of the pipeline must be examined. Denmark, for example, has a well structured agency-based system representing alternative interests.

6-6-2 Environmental Impact

Marine pipeline projects increasingly seem to be governed by national authority regulations requiring Environmental Impact Assessment (EIA). Though an EIA is not traditionally mandatory for offshore interfield pipelines, it is very often the case for pipelines near shore. In some northern European countries it takes approximately 2 years to carry out a full EIA, for which reason time scheduling is important.

When evaluating whether an EIA is required, a frequent criterion used by authorities will be whether the pipeline route lies within the country's national territorial waters – i.e. 12 nautical miles. Another criterion will be, if the project includes landfalls, in which case an EIA will normally be required. However, no general guidelines exist, and the evaluation therefore varies from country to country.

6-6-3 Operational Parameters

As a basis for the design it is necessary to know the operational parameters for the pipeline system. Such parameters are: the volume to be transported, its composition, its temperature, its pressure, etc. The operational parameters will normally be selected as the design basis for a given product.

The composition of the transported media will determine the selection of the pipe material. Hydrocarbons containing high quantities of CO₂ or H₂S may require the use of high alloy steels (e.g. stainless steel) or clad pipe, particularly in the presence of water or elevated temperatures.

6-7 Pipeline Size Determination

The pipeline diameter is determined on the basis of the main operational parameters for the pipeline system, such as:

- Flowrate
- Expected system availability e.g. tolerated uptime and downtime
- Requirements for delivery pressure
- Properties of the transported medium

The optimum pipeline dimension is based on the 'lifetime' evaluation of the system, taking into account the capital cost for the establishment of compressor/pumps, the pipeline itself, receiving facilities, as well as the operational and maintenance cost of the system.

An economic model for the pipeline system is often used to calculate different economic key parameters such as: net present value, unit transportation cost, etc.

An important part of the optimization process including the requirements for compression or pumping are flow calculations. In the initial phase the flow calculations may be performed on an overall level without detailed modeling of the thermodynamic conditions along the pipeline. However, such modeling may eventually be required, because parameters other than the pressure drop may be important factors for the dimension of the pipeline.

6-8 Pressure Control System

The pressure control system would usually comprise a pressure regulating system and a pressure safety system, as well as alarm systems and instrumentation to monitor the operation.

The pressure regulating system ensures that the pressure in the pipeline is kept at a specified level.

The pressure safety system denotes equipment that independently of the pressure regulating system ensures that the accidental pressure in the pipeline is kept below set values, for example it ensures that full well shut-in pressure cannot enter the pipeline.

The above pressure definitions are not universally recognized, which explains why pipeline design codes may identify the design pressure with maximum operational pressure, and the notion of “incidental” pressure e.g. worst-case pressures, which may be included in various safety factors.

6-9 Pipeline Performance Requirements and Design Criteria

Pipeline performance requirements and design criteria are defined in terms of the client’s requirements. These criteria will include water temperature, composition, flow, reliability, lifetime, location and budget restrictions. In most cases, all of these parameters are not fully defined at the start of the design process; pipeline flow, operating budgets, and even location commonly depend on onshore facilities that are still in the planning, design and permit-obtaining phases.

6-9-1 Initial Site Survey

Important site characteristics include bathymetry, bottom roughness, soil conditions, slope, current profiles, obstacle location, wave conditions, environmental restrictions and shoreline geometry; these and other site conditions greatly influence the pipeline design and cost.

A review of all existing offshore data plus a site visit and a diving expedition in the shallow water will frequently suffice for an initial survey. If bathymetry and bottom data are not available, it may be necessary to conduct a survey to get this information. In addition, depending upon how much is known of the oceanographic characteristics of the area, it may be necessary to measure the current at a few key locations.

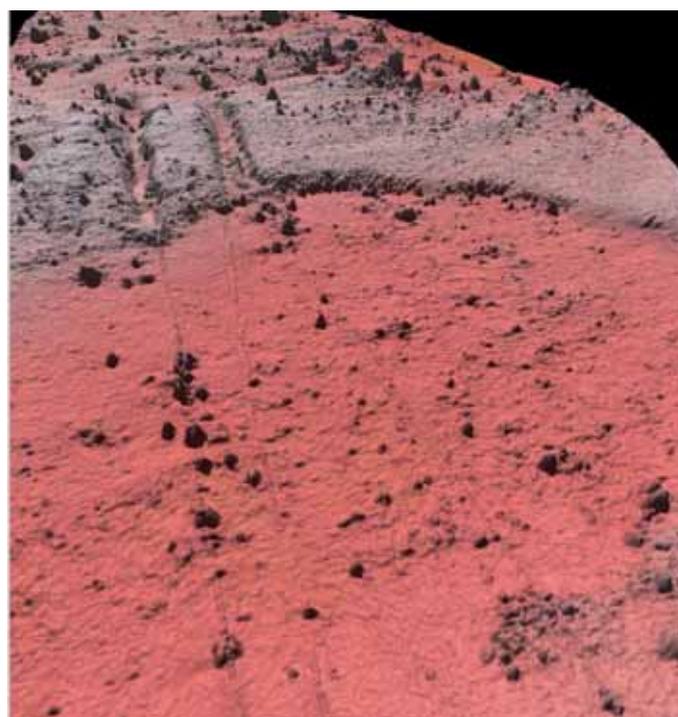


Figure 6.2
3D presentation of survey data.

Pipelines

6-9-2 Preliminary Design

A preliminary design concentrates on the critical aspects of the project that most directly affect the performance and cost of the pipeline. The final output of the design includes preliminary drawings, pipeline routing, an initial estimate of probable construction costs and a conceptual method for deployment of the pipeline.

An economically viable pipeline is one that is rapidly and easily deployed, and therefore it cannot be overemphasized how important deployment is to offshore pipeline cost and design. This is the most expensive phase in the establishment of a pipeline and is associated with a high concentration of activity and increased risk. All this occurs within a few days at sea. Weights, loads, buoyancies and material strains are therefore carefully balanced during this phase, so that the pipeline can survive deployment and function properly once in place. Pipe joints are placed at critical points to ease pipeline handling and excluded at points exposed to high loading.

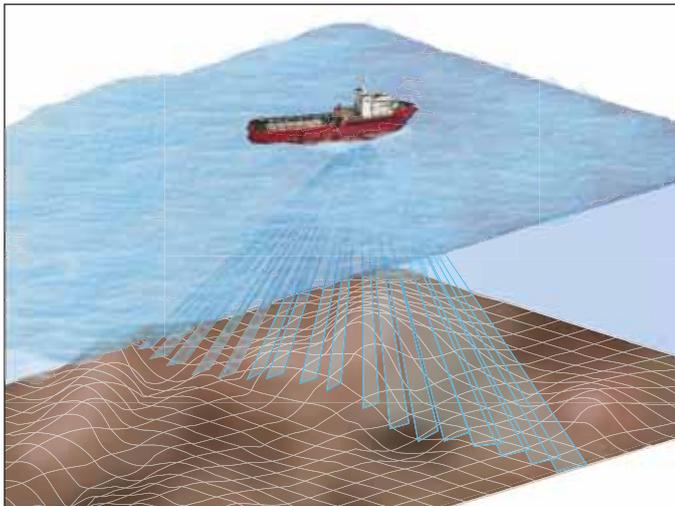


Figure 6.3 – Survey vessel gathering bathymetry data.

6-9-3 Detailed Route Survey

The preliminary design identifies critical oceanographic and site information that is needed for the final design and installation. This information includes the precise location of key obstacles on the ocean floor, measurement of shoreline geometry, collection of current data, and assessment of bottom slopes, soil conditions or roughness.

Surveying equipment may include SCUBA, manned submersibles or remote operated vehicles, ROV deployed bottom samplers, acoustic bathymetry, sub-bottom profilers, side scan systems, and precision bottom roughness samplers.

6-9-4 Final Design

In the final design phase the design plans (drawings), specifications, and estimate of probable construction costs are prepared. Careful attention is paid to every detail, so that the hardware designed can be successfully deployed and operated over the desired lifespan of the pipeline. Details include wave loading, corrosion, pipeline fatigue, water flow dynamics on pump start-up and shutdown, maintenance, electrical routing, and deployment loads.

As mentioned above, the risks and costs of the maritime portion of the installation can be quite high because of the concentration of critical tasks, the quantity and variety of equipment involved, and the number of personnel working. An unplanned delay results in significant additional costs, and some mistakes can end up causing loss of the pipeline. These problems are inherent in all marine construction, so proper planning of the deployment phase is a critical step which results in fewer risks and lower costs.



Figure 6.4 – Selection of intelligent pigs (scrapers).

6-9-5 Inspection

Pipeline inspection starts with pipe construction by checking each component and ends with the overall performance check of the installed pipeline. As sections of the pipeline are completed, the pipe is checked in relation to meeting specifications and whether it will perform satisfactorily for the client. Onshore, shoreline, and near shore portions of the pipeline are visually inspected as they are assembled and completed. The deep-sea portion of the pipeline can be inspected with an undersea submersible or ROV (Remotely operated underwater vehicle), although this may not be necessary for all pipeline designs. Welded pipeline is normally subjected to NDT on both field and double joint welds. Most common NDT is Ultrasound or X-ray if time and surroundings permit. Installation is followed by a pre commissioning that usually includes a pressure test to verify structural integrity. The final performance of the pipeline can be checked in detail by pumping water through the system and observing water flow rates, power consumption, water temperature, water quality, and pump start and stop dynamics.

6-10 Risk and Safety

The overall safety concern for a marine pipeline is to ensure that during both construction and operation of the system there is a low probability of damage to the pipeline and of deleterious effects on third parties, including the environment.

Consequently, risk and safety activities in relation to offshore pipeline projects have the following main objectives:

- Security of supply
- Personnel safety
- Environmental safety

The specific focus on any of the above mentioned points depends on the medium to be transported in the pipeline system. For example in transporting natural gas the environmental impact may be less severe compared to systems transporting oil, but the safety of the personnel may be more critical due to the potential explosive nature of gas.

6-11 Installation

Marine pipeline installation comprises many activities including fabrication of the pipe joints, bends and components through to preparation of the pipeline for commissioning. The principal exercise is the joining of the individual pipe joints into a continuous pipe string. This may take place concurrently with the installation on the seabed by lay barge, or it may be carried out onshore in preparation for installation by reeling, towing, pulling or directional drilling. To construct the complete pipeline it may be necessary to perform offshore tie-ins to other pipe strings or to risers. These connections may be carried out on the seabed or above water.



Figure 6.5 – Stinger on pipelay vessel in operation.

Alternatively the pipeline can be pulled through the riser where the riser and jacket duplicates as startup anchor for the pipeline installation.


In the North Sea most pipelines are trenched and backfilled leaving the pipeline approximately 1,5 m below the seabed. Large diameter pipelines are usually left on the seabed if they are found to be able to withstand common fishing gear interaction.

In areas with difficult seabed conditions the pipeline must be controlled by anchors on the seabed.

Pipelines close to installations and crossings are usually protected by concrete mattresses, rocks or other protective structures in steel, concrete or composites.

Once the pipeline is installed on the seabed it is connected to installations by spools. Spools are usually Z-shaped in order to absorb the thermal expansion from the pipeline.

Before the pipeline is handed over to production it must be commissioned by cleaning and pressure testing according to the applied code and requirements.

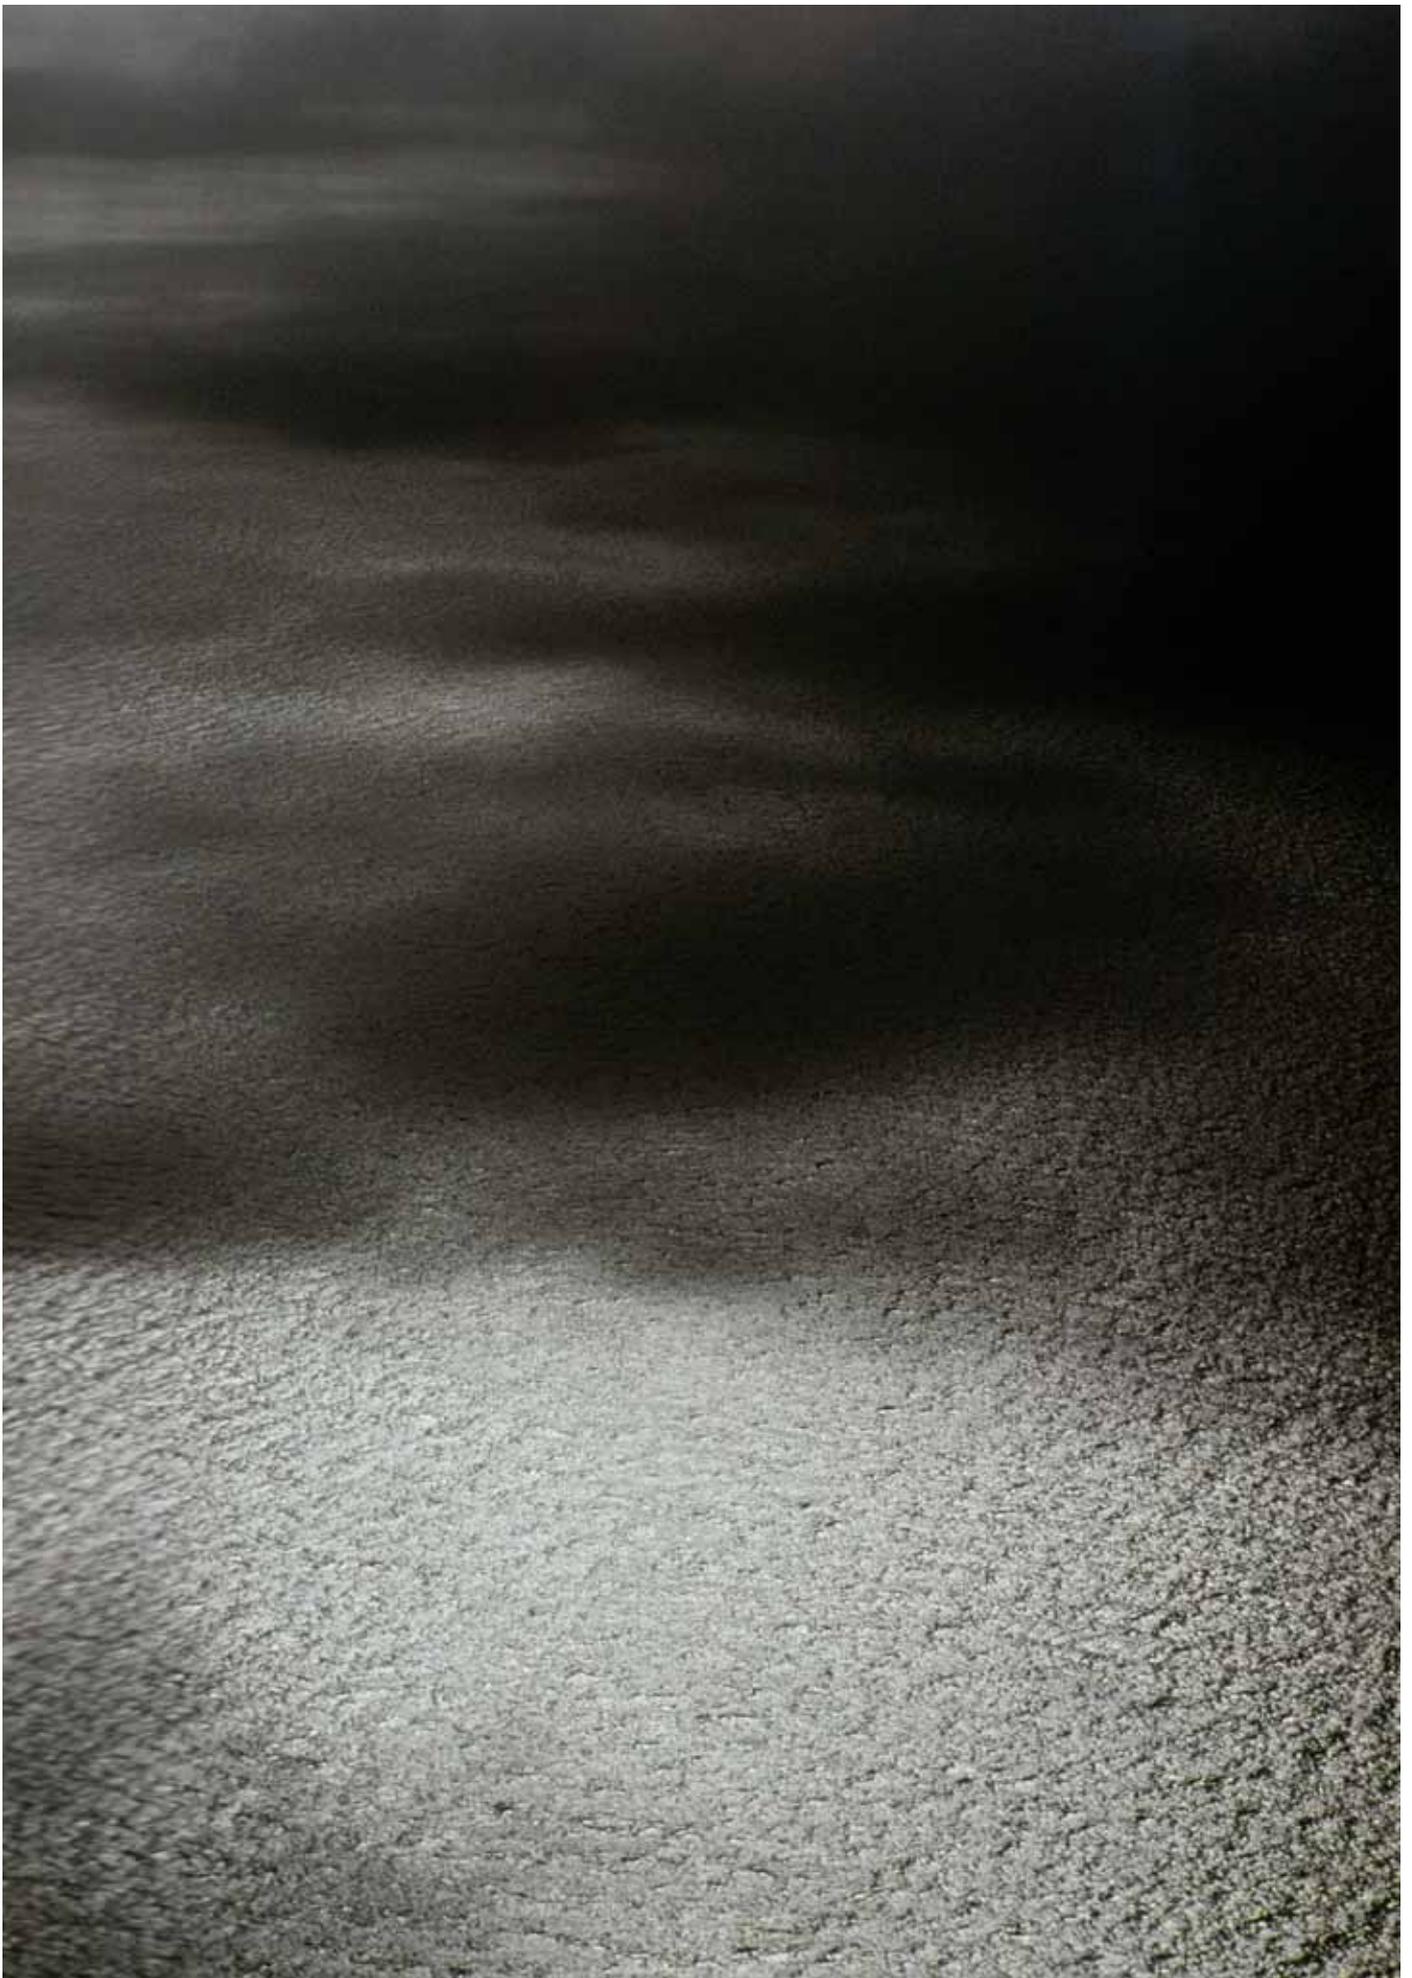

Chapter 7

Oil and Gas Activities in the North Sea

7-1 Oil and Gas Activities in the North Sea

Significant North Sea oil and natural gas reserves were discovered in the 1960's. However, the North Sea did not emerge as a key, non-OPEC oil producing area until the 1980's and 1990's, when major projects began coming on-stream. Oil and natural gas extraction in the North Sea's inhospitable climate and depths require sophisticated offshore technology. Consequently, the region is a relatively high-cost producer, but its political stability and proximity to major European consumer markets have allowed it to play a major role in world oil and natural gas markets.



Figure 7.1 – The North Sea.

Denmark together with Norway are unique in the North Sea as the only oil exporting countries in all of Europe, Denmark actually exporting more oil than it is consuming. The North Sea will continue to

be a sizable crude oil producer for many years to come, although output from its largest producers - the UK and Norway - has essentially reached a plateau and is projected to begin a long-term decline.

In the near future, improved oil recovery technologies, continued high oil prices and new projects coming online is expected to delay substantial declines in output. Discoveries of new sizable volumes of oil will be welcome in the future, to delay or even revert a downward trend in oil production.

With regards to natural gas, the North Sea is seen as a mature region. Norway and Holland have however seen an increase in natural gas production in recent years, while the UK is likely to become a net gas importer in the near future. The importance of the North Sea as a key supplier of natural gas will continue, as consumption in Europe is predicted to increase significantly in the future. Oil and gas production from Denmark is detailed in later chapters.

7-1-1 Oil Activities

According to "CIA the World Fact", the five countries in the North Sea region had 11.266 billion bbl of proven oil reserves in 2008, of which Norway disposes over the major part (59%), followed by the UK (30%) and Denmark (7%). Cf. figure 7.2, the total oil production for the North Sea region, both on- and offshore, was 4.559 bbl per day. Norway (54%), UK (35%) and Denmark (6.3%) are the largest producers, but only Denmark and Norway are net exporters.

Because Norway only consumes a relatively small amount of oil each year, the country is able to export the majority of its production.

Denmark is also a net exporter, exporting roughly the same amount which it consumes. The UK, on the other hand, a net exporter of crude oil since 1981, saw its status change to that of importer in 2008 as a result of a decrease in production from peak levels in 1999.

Country	Oil reserves(billion bbl)	Oil production(million bbl/day)	country comparison to the world (By production)
Norway	6.68	2.466	12
United Kingdom	3.41	1.584	20
Denmark	0.8	0.287	38
Germany	0.276	0.15	47
Holland	0.1	0.072	57

Table 7.1 Oil production and reserves in the North Sea (CIAWORLD FACT) Jan.2009

Oil and Gas Activities in the North Sea

7-1-1-1 Denmark

The first oil discovery in the entire North Sea was made by Maersk Oil (A.P.Møller – Maersk) as operator for DUC in 1966 in the field later named the Kraka Field. In July 1972, oil production commenced from the Dan Field, 200 km west of the Danish coast. The Dan Field was the first oil field in the entire North Sea with production from permanent facilities. Since then many more oil and gas fields have been brought into production by Maersk Oil and the newer operators Hess Denmark and DONG Energy.

In 2009, the total oil production in Denmark was 0.261 million bbl per day, all of it located offshore. Three operators are responsible for the production of oil and gas: DONG E&P A/S, Hess Denmark ApS and Maersk Olie og Gas AS. A total of 10 companies have interests in the producing fields, and the individual companies' shares of production appear from figure 7.2.

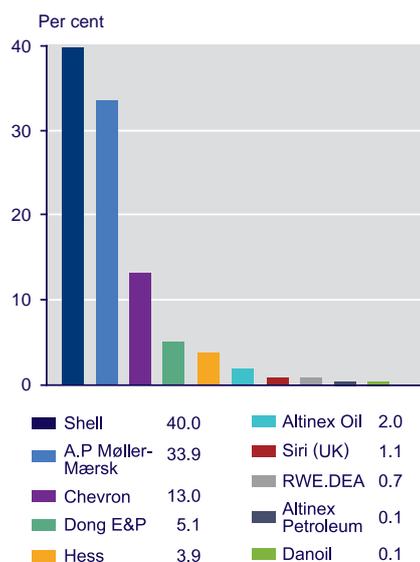


Figure 7.2 oil production by company (Energi styrelsen)

Abroad Danish operators have in recent years been very active. Maersk Oil is presently undertaking a major redevelopment in the Qatar Al-Shaheen field that will result in a production above 80,000 m³/d in 2010, up from 48,000 m³/d in 2007. Also the United Kingdom, Algeria, Kazakhstan, and Brazil are key markets for Maersk Oil. Many new fields have come on-stream in Denmark in the recent years, including Halfdan, Siri, and Syd-Arne developments, which have helped to bolster the country's crude oil production. DONG Energy has recently found commercial volumes of oil in the Cecilie and Hejre fields and other fields under development include Adda and Boje.

Maersk Oil has found considerable new fields in the latter years, and the latest new-comer Noreco has found oil in the first appraisal well following the 6th licensing round of Danish oil/gas concessions.

Denmark had proven oil reserves of 0.8 billion bbl at the end of 2008. Crude oil production has more than doubled over the past decade, while annual petroleum consumption has remained fairly constant over the same period. Oil consumption in Denmark at present represents only about 1.3% of the annual consumption by the 25 European Union countries, placing Denmark in 14th position. Denmark, on the other hand, accounts for about 11% of the total production in the European Union placing it in 2nd position in the EU (right behind the United Kingdom) and in 38th position in the world. On a world basis Denmark is in 15th position when considering per capita oil production.

7-1-1-2 Norway

The bulk of Norway's oil production comes from the North Sea, with smaller amounts coming from the Norwegian Sea. Norwegian oil production rose dramatically from 1980 until the mid-1990's, but has since remained at a plateau.

The largest oil field in Norway is the Troll complex, operated by Hydro. Other important fields include Ekofisk (ConocoPhillips), Snorre (Hydro Statoil), Oseberg (Hydro Statoil), and Draugen (Shell). Great emphasis is placed on increasing production from existing projects, including smaller satellite fields.

Industry analysts consider the Norway Continental Shelf (NCS) a mature oil producing region. Most of the country's major oil fields have peaked, with production remaining stable or declining slightly. Companies are still discovering oil in the NCS, but none of the recent discoveries have been significant.

7-1-1-3 United Kingdom

The UK Continental Shelf (UKCS), located in the North Sea off the eastern coast of the UK, contains the bulk of the country's oil reserves. Most of the UK crude oil grades are light and sweet (30° to 40° API), which generally make them attractive to foreign buyers. The UK government expects oil production in the country to continue the decline, reaching 1.584 million bbl/d by 2009. Reasons for this decline include:

- 1) The overall maturity of the country's oil fields,
- 2) The application of new crude oil extraction technologies leading to field exhaustion at a greater rate,
- 3) Increasing costs as production shifts to more remote and inhospitable regions.

7-1-1-4 The Netherlands

Overall, oil production in the Netherlands has been in decline since 1986, when it peaked at 20,000 m³/d. The production is today approximately half of the peak value.

Country	Gas reserves(billion m3)	Gas production(billion m ³)	country comparison to the world (By production)
Norway	2313	99.2	6
Holland	1346	84.69	8
United Kingdom	342.9	69.9	13
Germany	175.6	16.36	33
Denmark	60	8.6	42

Table 7.1 Oil production and reserves in the North Sea
(CIAWORLD FACT) Jan.2009

7-1-2 Gas Activities

According to “CIA FACT SHEET” the 5 countries of the North Sea region combined had proven natural gas reserves of 4237 billion m³ (January 2009). 2 countries, Norway and the Netherlands, account for over 75% of these reserves. On the other hand, the United Kingdom is the largest producer. The North Sea region is an important source of natural gas for Europe, second only to Russia in total exports to the European Union. Natural gas production in the region has increased dramatically since the early 1980’s, with a production of 280.15 billion m³ of natural gas in 2008. However, natural gas production in the region has begun to plateau, Norway being the only country to add any significant new capacity.

7-1-2-1 Denmark

Natural gas production totalled 8.6 billion m³ of gas in 2009, with sales gas accounting for 7.3 billion Nm³. By sales gas is meant the portion of the gas suitable for sale.

Production dropped by 13.1% compared to 2008. Total production declined by 1% from 2007, whereas the amount of sales gas increased by 11% compared to 2007.

The Tyra Field acts as a buffer which means that gas from other fields can be injected into the Tyra Field during periods of low gas consumption and thus low gas sales, for example during summer. When the demand for gas increases, the gas injected in the Tyra Field is produced again.

7-1-2-2 Norway

The majority of Norway’s natural gas reserves are situated in the North Sea, but there are also significant quantities in the Norwegian Sea and the Barents Sea. Norway is the eighth largest natural gas producer in the world, producing 99.2 billion m³ in 2008. However, because of the country’s low domestic consumption, Norway was the world’s 3rd largest net exporter of natural gas in 2003 after Russia and Canada, and is forecast to grow substantially in the years to come.

According to the CIA FACT SHEET, Norway had 2313 trillion m³ of proven natural gas reserves as of January 2009. Norway is expanding its exploration and development by increasing the number of wells drilled and using enhanced recovery in mature wells. A record 56 wells were drilled in 2008 led by StatoilHydro. Norway’s northern waters continue to be highly gas-prone: the Barents Sea yielded 3 gas finds and one of gas and oil, while the Norwegian Sea’s discoveries were all natural gas. In 2009, the company plans to drill another 65 wells.

As is the case with the oil sector, StatoilHydro dominates natural gas production in Norway. Several international majors, such as ExxonMobil, ConocoPhillips, Total, Shell, and Eni also have a sizable presence in the natural gas and oil sectors, working in partnership with Statoil Hydro.

State-owned Gassco is responsible for administering the natural gas pipeline network. The company also manages Gassled, the network of international pipelines and receiving terminals that exports Norway’s natural gas production to the United Kingdom and continental Europe.

A small group of fields account for the bulk of Norway’s total natural gas production. The largest single field is Troll, producing 26.3 billion m³ in 2004 and representing about 1/3 of Norway’s total natural gas production. Other important fields include Sleipner Ost (12.7 billion m³), Asgard (10.2 billion m³), and Oseberg (7.1 billion m³). These 4 fields together produce over 70% of Norway’s total gas output.

Despite the maturation of its major natural gas fields in the North Sea, Norway has been able to sustain annual increases in total natural gas production by incorporating new fields. In October 2004, the Kvittebjorn field came on-stream with an expected production level of 20.1 billion m³ per day. Statoil expected to bring the Halten Bank West project on-stream in October 2005, with estimated reserves of 34 billion m³ spread over 5 fields (Kristin, Lavrans, Erlend, Morvin, and Ragnfrid). In the long term, Norway is counting on non-North Sea projects to provide significant natural gas production, such as Ormen Lange (Norwegian Sea) and Snohvit (Barents Sea).

Oil and Gas Activities in the North Sea

7-1-2-3 United Kingdom

Most of UK natural gas reserves are situated in 3 distinct areas:

- 1) Associated fields in the UKCS
- 2) Non-associated fields in the Southern Gas Basin, located adjacent to the Dutch sector of the North Sea
- 3) Non-associated fields in the Irish Sea

Since 1997, the UK has been a net exporter of natural gas. However, as is the case with the country's oil reserves, most of the natural gas fields have already reached a high degree of maturity, and the UK government estimates that the country will again become a net importer of natural gas by the end of the decade. As an indication of this trend, the operators of the Interconnector natural gas pipeline linking the UK and Belgium announced in August 2005 that they would change the flow of the system, importing gas from the Continent, rather than exporting gas from the UK. Furthermore, in 2005 the UK received its first shipment of LNG in three decades.

The UK produced 70 billion m³ in 2008. The largest concentration of natural gas production in the UK is from the Shearwater-Elgin area of the Southern Gas Basin. The area contains five non-associated gas fields, Elgin (Total), Franklin (Total), Halley (Talisman), Scoter (Shell), and Shearwater (Shell). The UK also produces significant

amounts of associated natural gas from its oil fields in the UKCS.

Like the oil industry, smaller independent operators have been able to acquire some maturing assets from larger operators who find it difficult to operate these older, declining fields profitably.

7-1-2-4 The Netherlands

In 2008, natural gas production in the Netherlands was 84.7 billion m³. Natural gas production in the country has declined, not due to natural factors, but to government policy. The Netherlands has passed the Natural Gas Law, which limits natural gas production to 75.9 billion m³ per year between 2003-2007, with this limit dropping to 70 billion m³ between 2008 and 2013. The government made this policy decision to cut back production in order to maintain reserves for future use. According to the Dutch Ministry of Economic Affairs, Dutch natural gas production will continue to remain steady or slightly decline through 2014.

The onshore Groningen field, located in the north-east of the country, accounts for about one-half of total Dutch natural gas production, with remaining production spread across small fields both onshore and in the North Sea. The largest offshore field is K15. Nederlandse Aardolie Maatschappij (NAM), a consortium of ExxonMobil and Royal Dutch Shell, operates both K15 and the Groningen field.



Chapter 8

Oil and Gas Production in Denmark

8-1 Licenses and Exploration

8-1-1 History

The first exploration licence was granted in 1935. Ever since then Denmark has had oil and gas exploration activities. In 1966 A.P. Moeller discovered hydrocarbons with the first well in the Danish part of the North Sea. The discovery was also the first find in the entire North Sea. The exploration continued, and a series of oil and gas fields were found. In 1972 the first oil was produced from the Dan field.

Since 1983 areas in the North Sea have been offered to interested oil companies in a system of rounds. In total 6 licencing rounds so far have been held, and with the latest one in 2005/2006.

Furthermore, in 1996 an Open Door procedure for areas west of 6°15' eastern longitudes was introduced.

8-1-2 Licensing

Companies are required to have a licence to explore for hydrocarbons. At the granting of a licence one or more companies are given the right to explore and produce within a defined area.

Licences are granted through licencing rounds and via the Open Door procedure. In Denmark so far 6 licencing rounds have been held, and with the latest one in 2005/2006. The latest licencing rounds comprised all non-licenced areas west of 6°15' eastern longitude.

In 1996 an Open Door procedure was introduced, with an annual open period from January 2 to September 30. The Open Door procedure covers all non-licenced areas east of 6°15' eastern longitude. Sustained interest in oil and gas exploration in the Danish subsoil in 2008 is reflected in the fact that 1 new licence was granted, 2 new applications for licences in the Open Door area were submitted and the number of appraisal wells increased compared to last year. In addition, experiments have been made with a new geophysical survey method in the North Sea.

Considerable oil and gas resources still exist in the Danish subsoil, and discoveries have been made at several locations – discoveries that may turn out to be substantial. However, further exploration that may contribute to a better understanding of the areas is, still vital. Continued research in new technology and the testing of new exploration methods also play a major role for Denmark's future oil and gas production.

8-1-3 Seismic Surveys, etc.

Seismic surveys and other preliminary investigations are carried out to gather information that can be used to map the oil and gas accumulations in the subsoil and to investigate the potential for making new discoveries.

Oil companies that have an exclusive right to an area in the form of a licence pursuant to the Danish Subsoil Act have an associated right to carry out such surveys and investigations.

Companies that do not have a licence can apply for permission to carry out preliminary investigations in accordance with section 3 of the Danish Subsoil Act. This option is used particularly by specialized geophysical companies that acquire seismic data for the purpose of resale to oil companies.

8-1-4 Open Door Procedure

In 1997 an Open Door procedure was introduced for all non-licenced areas east of 6° 15' eastern longitude, i.e. all onshore areas as well as the offshore area except the westernmost part of the North Sea. The oil companies can apply for licences at any time during the yearly opening period from the 2nd of January until the 30th of September (both included).

Changes in the Open Door area

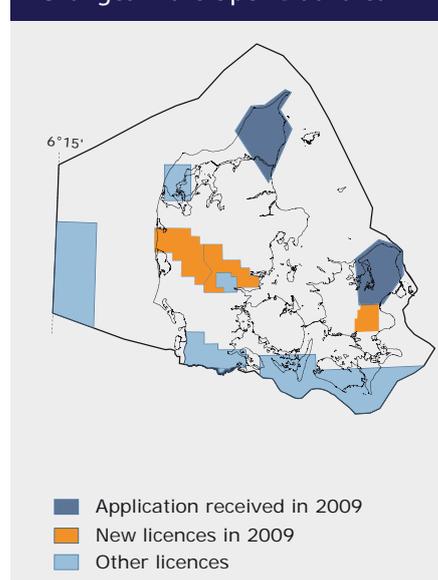


Figure 8.1

The procedure comprises an area with no previous oil or gas discoveries. The Open Door licences are consequently granted on easier terms compared to the 'Licencing Round Area' in the westernmost part of the North Sea. Thus the oil companies do not have to commit to exploratory drilling, when the licence is granted. The work programmes that determine the exploration work to be carried out by the oil companies during the 6 year exploration period are divided into phases, such that the companies must gradually commit to more exploratory work or relinquish the licence.

Oil and Gas Production in Denmark

The fact that 1 new licence was granted and 2 new applications for licences were received for the Open Door area in 2008 signals sustained interest from the oil companies in exploring the Danish subsoil, also outside the areas traditionally explored in the North Sea; see figure 8.1

On 31 March 2008, the Minister for Climate and Energy granted Danica Resources ApS (80%) and the Danish North Sea Fund (20%) a licence to explore for and produce oil and gas, licence 1/08, that covers an area in the western part of the Baltic Sea and onshore areas on the islands of Lolland-Falster and Langeland.

Danica Resources ApS, the operator of the licence, was incorporated as a Danish company in 2007.

On 18 September 2008, Danica Jutland ApS, a newly established Danish company, applied for a licence to explore for and produce oil and gas under the Open Door procedure in an area located in Mid-Jutland. The DEA is now considering the application and carrying on negotiations with the applicant on an ongoing basis.

On 30 September 2008, GMT Exploration Company LLC and Jordan Dansk Corporation submitted an application for a licence in an area that mostly overlaps the area that Danica Jutland ApS applied for on 18 September 2008. As the first-come, first-served policy applies in the Open Door area, the DEA is only considering the application submitted first.

On 9 April 2009, GMT Exploration Company LLC and Jordan Dansk Corporation withdrew their application.

Danish 6th Round Licence awards

First mentioned company in each licence is operator. Existing licences are shown in light grey

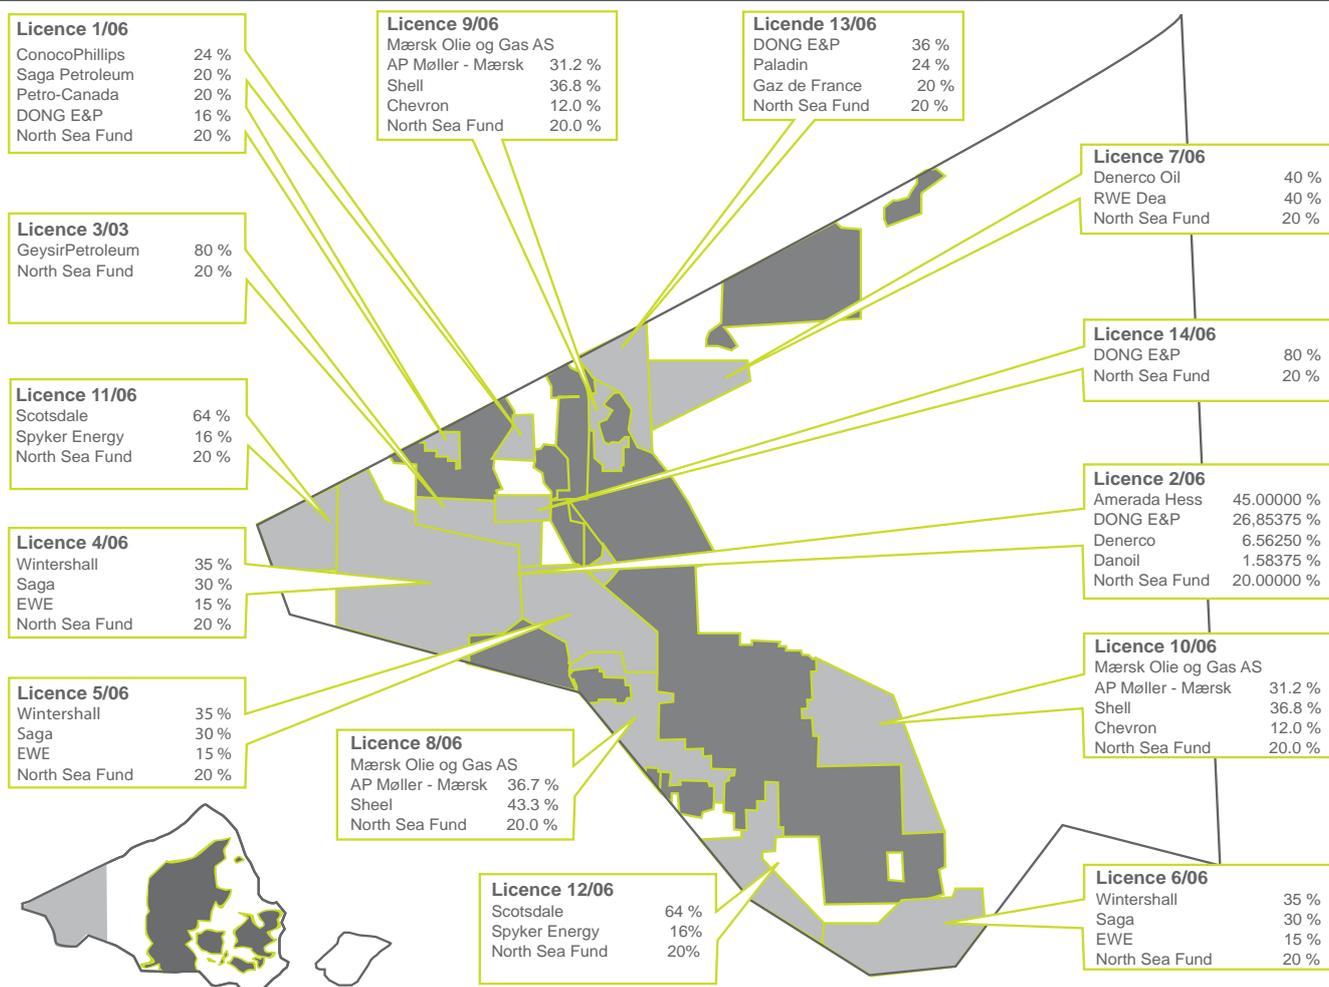


Figure 8.1 – Result of the 6th Licensing Round.

8-2 6th Licensing Round

The awarding of 14 new licences in the 6th Licensing Round in 2006 created the basis for extensive exploration in the years to come.

In 2005, 2 3D/4D and several 2D seismic surveys were carried out in the Danish territory, and the area surveyed seismically was thus the most extensive in 5 years.

The increased seismic surveying signals a continued interest in exploring the Danish sector, both with a view to discovering new hydrocarbon accumulations and to assessing the extension of hydrocarbon accumulations in areas surrounding existing fields.

Exploration activity is expected to intensify significantly in the next few years, as new licence holders from the 6th Licensing Round carry out their work programs in the licenced areas.

The last licensing round for areas in the Central Graben and adjoining areas was held in 1998, and the majority of the exploration commitments undertaken by the oil companies in 1998 had been fulfilled by 2005. Based on this, the 6th Licensing Round was opened for applications in May 2005. Oil companies were invited to apply for new licences before the closing date of 1 November 2005. By the end of the application period, the DEA (Danish Energy Authority) had received 17 applications from a total of 20 oil companies. By comparison, a total of 12 and 19 applications were submitted in the 4th and 5th Licensing Rounds, respectively.

Following assessment of the applications and discussions with the applicants, the DEA awarded 14 licences for oil and gas exploration and production.

In general, applications in the 6th Round reflected the fact that comprehensive preliminary studies had been carried out. Work programs offered were satisfactory, and the applications covered a number of different exploration prospects, fairly evenly distributed over the area offered for licencing. This made it possible to adjust the areas applied for, whereby most of the applications could be met, with minor or no adjustments of the area applied for.

The combined work programs under the licences granted in the 6th Round comprise seven firm wells and 12 contingent wells. The licensee is committed to drilling firm wells, while contingent wells are only to be drilled under specifically defined circumstances. In addition, the work programs include the obligation to perform seismic surveys and other investigations of varying scope and density over the area applied for. The investments required to meet the unconditional obligations of the 6th Round work programs are estimated to total €175 million.

In the 6th Licensing Round, licences were granted to oil companies not previously holding licences in Denmark. Another outcome of the 6th Licensing Round was that the companies Wintershall, Denerco (now Noreco), GeysirPetroleum and Scotsdale, none of which companies had not previously acted as operators in the Danish territory, were approved as operators for the new licences.

The Danish North Sea Fund was awarded the state's 20% share of the new licences. The expenditures of the Danish North Sea Fund for the unconditional work programs are estimated to total approx. €35 million.

8-2-1 Relinquishment in the Contiguous Area

The Sole Concession area includes the Contiguous Area (TCA) in the southern part of the Central Graben. The Sole Concession area was granted to A.P. Møller (Maersk Oil) in 1962. In 1981, the Danish state and A.P. Møller drew up an agreement according to which the Concessionaires were to relinquish 25% of each of 9 of the 16 blocks making up the Contiguous Area, some areas being relinquished as of 1 January 2000 and the rest as of 1 January 2005.

However, areas that comprise producing fields and areas for which development plans were submitted to the DEA's approval were exempt from relinquishment.

In 2000, A.P. Moeller relinquished 25% of 4 out of the 9 blocks. The remaining blocks were contained entirely within the field borders drawn up in connection with the relinquishment procedure. However, the borders around a number of fields were based on a maximum delineation, and the Concessionaires committed themselves to carrying out extensive surveys from 2000 to 2004, in order to make a final delineation in the first half of 2004 at the latest.

On 23 September 2005, following negotiations with the Concessionaires under the Sole Concession area agreement of 8 July 1962, the DEA approved the area relinquishment in the Contiguous Area as of 1 January 2005.

The area relinquishment as of 1 January 2005 comprised 25% of 2 blocks. In one individual area (area I), a final delineation could not be made with sufficient certainty.

The Concessionaires have committed themselves to carrying out surveys in this area that will allow them to make a final delineation by 1 July 2008.

The Concessionaires may retain the remaining area comprised by the Sole Concession area until its expiry in 2042. However, if production in a field is discontinued, the relevant field must be relinquished to the state.

Oil and Gas Production in Denmark

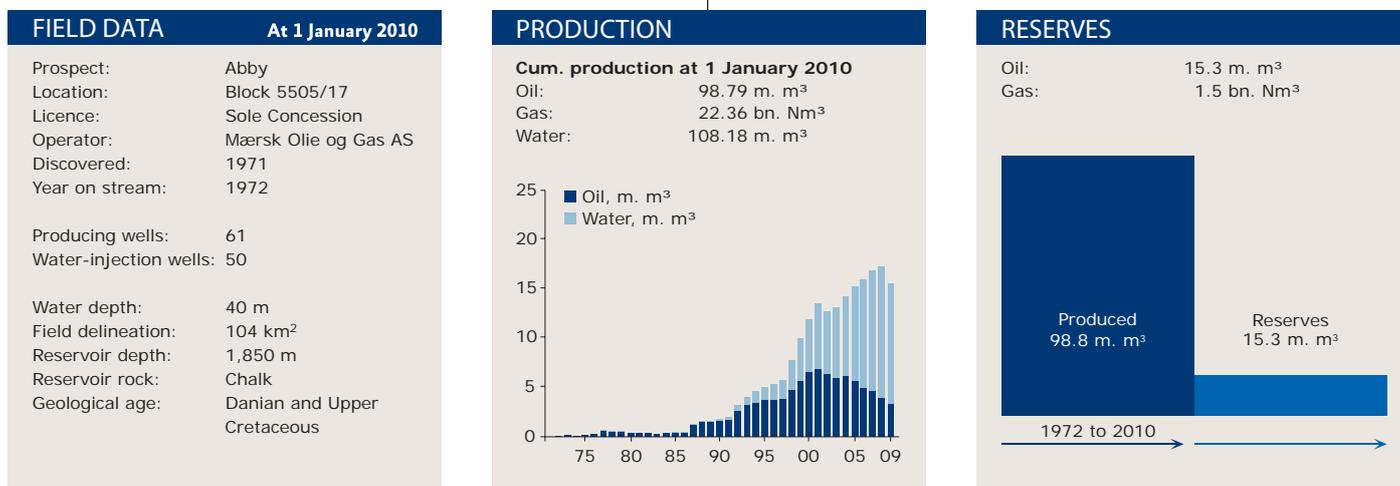


Figure 8-2 The Dan Field Data

8-3 Producing Fields

8-3-1 The Dan Field

The Dan Field has been in production and operated by Maersk Oil & Gas AS since 1972. A new platform, Dan FG, with facilities for separation, gas compression and water injection, was installed in 2005.

The Field is an anticlinal structure, induced through salt tectonics. A major fault divides the field into 2 reservoir blocks, which, in turn, are intersected by a number of minor faults. The chalk reservoir has high porosity, although low permeability. This oil field has a gas cap.

Recovery takes place from the central part of the Dan Field and from large sections of the flanks of the field. Particularly the western flank of the Dan Field, close to the Halfdan Field, has demonstrated good production properties. The presence of oil in the western flank of the Dan Field was not confirmed until 1998 with the drilling of the MFF-19C well, which also established the existence of the Halfdan Field.

Recovery from the field is based on the simultaneous production of oil and injection of water to maintain reservoir pressure. Water injection was initiated in 1989, and has gradually been extended to the whole field. The recovery of oil is optimized by flooding the reservoir with water to the extent possible.

The Dan Field comprises 6 wellhead platforms, a combined wellhead and processing platform, a processing platform with a flare tower, processing and accommodation platforms, and 2 gas flare stacks.

At the Dan Field facilities are available to receive production from the adjacent Kraka and Regnar satellite fields, as well as to receive

gas produced at the Halfdan Field. The Dan installations supply the Halfdan Field with injection water.

After final processing, oil is transported to shore via the Gorm E platform. The gas is pre-processed and transported to Tyra East for final processing. Treated production water from Dan and its satellite fields is discharged into the sea.

8-3-2 The Gorm Field

At the beginning of 2005, the DEA approved a plan for further development of the Gorm Field. The field has been in production since 1981, but the operator Maersk Olie og Gas AS used technical studies to identify areas in the field that were not drained optimally. The approved plan provides for the drilling of 4 new wells, and outlines the possibility of drilling up to 5 additional wells, depending on the results from the first wells. The plan also provides for an expansion of the produced water treatment plant.

In the course of 2005, the first well was drilled (N-58A), and the second spudded. 4 older wells that had not been in operation for a long period were suspended, and the well slots were reused in the new wells.

8-3-3 The Halfdan Field

The Halfdan Field comprises the Halfdan, Sif and Igor areas and contains a continuous hydrocarbon accumulation at different strata levels. The southwestern part of the field primarily contains oil in Maastrichtian layers, while the area towards the north and east primarily contains gas in Danian layers.

Oil and Gas Production in Denmark

FIELD DATA		At 1 January 2010
Prospect:	Vern	
Location:	Blocks 5504/15 and 16	
Licence:	Sole Concession	
Operator:	Mærsk Olie og Gas AS	
Discovered:	1971	
Year on stream:	1981	
Producing wells:	36	
Gas-injection wells:	2	
Water-injection wells:	14	
Water depth:	39 m	
Field delineation:	63 km ²	
Reservoir depth:	2,100 m	
Reservoir rock:	Chalk	
Geological age:	Danian and Upper Cretaceous	

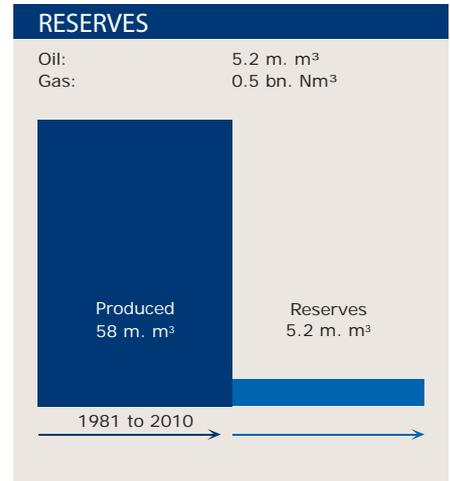
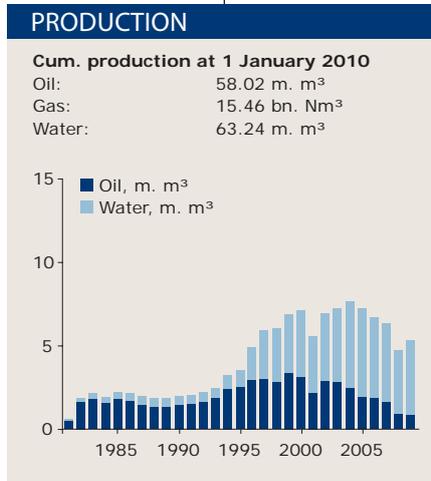


Figure 8-3 The Gorm Field Data

The accumulation is contained in a limited part of the chalk formation, which constituted a structural trap in earlier geological times. The structure gradually disintegrated, and the oil began migrating away from the area due to later movements in the reservoir layers.

However, the oil and gas deposits have migrated a short distance only due to the low permeability of the reservoir. This porous, unfractured chalk is similar to that found in the western flank of the Dan Field.

The development of the Halfdan Field has occurred in phases and is still ongoing. The Halfdan Field comprises the Halfdan, Sif and Igor areas and contains a large continuous hydrocarbon accumulation at different strata levels. The southwestern part of the field, Halfdan, primarily contains oil in Maastrichtian layers, while the areas towards the north and east, Sif and Igor, and primarily contain gas in Danian layers.

Recovery is based on the Fracture Aligned Sweep Technology (FAST), where long horizontal wells are arranged in a pattern of alternate production and water-injection wells with parallel well trajectories. Varying the injection pressure in the well causes the rock to fracture. This generates a continuous water front along the whole length of the well that drives the oil in the direction of the production wells.

The production of gas from Danian layers is based on primary recovery from multilateral horizontal wells, using the reservoir pressure. The Sif wells extend from the Halfdan BA platform in a fan-like pattern, while the Igor wells form a helical pattern from the Halfdan CA platform.

The Halfdan Field comprises 2 platform complexes, Halfdan D and

FIELD DATA		At 1 January 2010
Prospect:	Nana, Sif and Igor	
Location:	Blocks 5505/13 and 5504/16	
Licence:	Sole Concession	
Operator:	Mærsk Olie og Gas AS	
Discovered:	1968, 1999	
Year on stream:	1999, 2004 and 2007	
Oil-producing wells:	35 (Halfdan)	
Water-injection wells:	26 (Halfdan)	
Gas-producing wells:	16 (Sif and Igor)	
Reservoir depth:	2,030-2,100 m	
Reservoir rock:	Chalk	
Geological age:	Danian and Upper Cretaceous	

Further details appear from the boxes on pages 118 and 119.

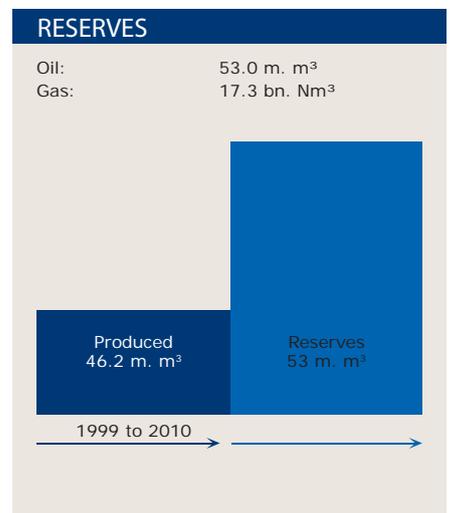
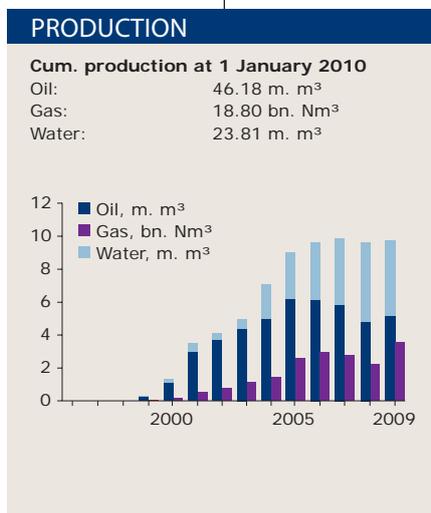


Figure 8-4 The Halfdan Field data

Oil and Gas Production in Denmark

FIELD DATA		At 1 January 2010
Prospect:	Lulu/West Lulu	
Location:	Blocks 5604/21 and 22	
Licence:	Sole Concession	
Operator:	Mærsk Olie og Gas AS	
Discovered:	1980 (Lulu)	
	1983 (West Lulu)	
Year on stream:	1997	
Gas-producing wells:	2 (Harald East)	
	2 (Harald West)	
Water depth:	64 m	
Field delineation:	56 km ²	
Reservoir depth:	2,700 m (Harald East)	
	3,650 m (Harald West)	
Reservoir rock:	Chalk (Harald East)	
	Sandstone (Harald West)	
Geological age:	Danian/Upper Cretaceous (Harald East) and Middle Jurassic (Harald West)	

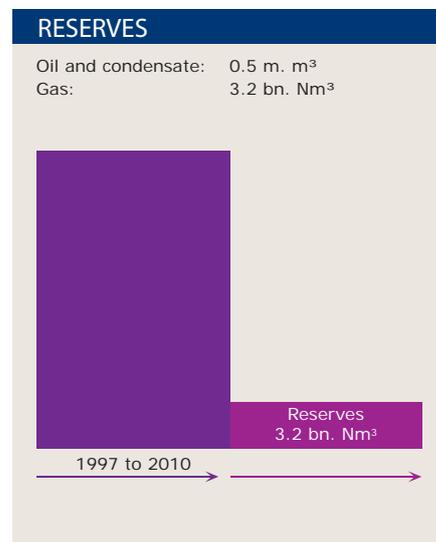
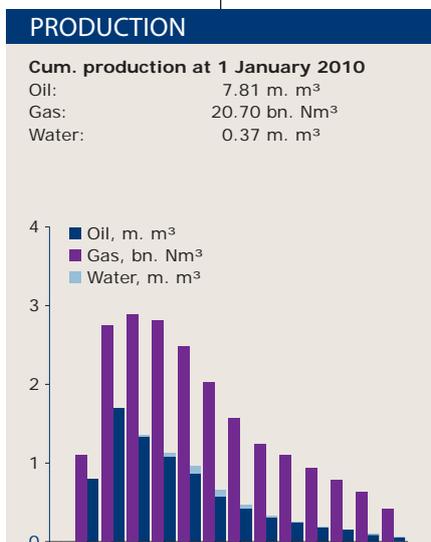


Figure 8-5 The Harald Field Data

Halfdan B, as well as an unmanned satellite platform, Halfdan CA. Halfdan B is located about 2 km from Halfdan D that provides it with power, injection water and lift gas. Halfdan CA, with capacity for 10 wells, is located about 7 km northeast of the Halfdan B complex.

The Dan installations supply Halfdan D and B with injection water. Treated production water from Halfdan and Sif/Igor is discharged into the sea.

To increase the processing and transportation capacity for production from the Halfdan Field, a new 20" pipeline has been established to transport oil and produced water from the Halfdan B complex to the Dan FG platform in the Dan Field.

Halfdan HDB has accommodation facilities for 32 persons, while there are accommodation facilities for 80 persons at Halfdan HBC.

8-3-4 The Harald Field

The Harald Field consists of 2 accumulations, Harald East (Lulu) and Harald West (West Lulu), that mainly contain gas.

The Harald East structure is an anticline induced through salt tectonics. The gas zone is up to 75 m thick.

The Harald West structure is a tilted Jurassic fault block. The sandstone reservoir is of Middle Jurassic age, and is 100 m thick.

FIELD DATA		At 1 January 2010
Location:	Blocks 5605/10 and 14	
Licence:	4/95	
Operator:	DONG E&P A/S	
Discovered:	2000	
Year on stream:	2003	
Producing wells:	8	
Water-injection wells:	5	
Water depth:	60 m	
Field delineation:	45 km ²	
Reservoir depth:	1,700 m	
Reservoir rock:	Sandstone	
Geological age:	Eocene/Palaeocene	

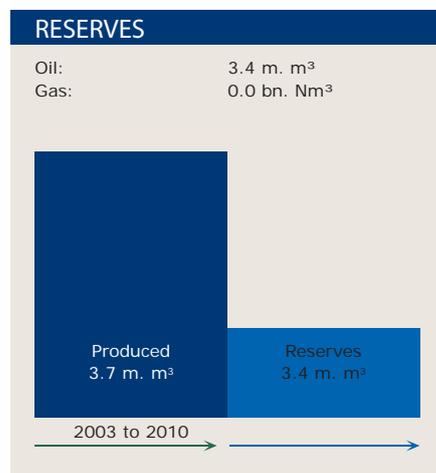
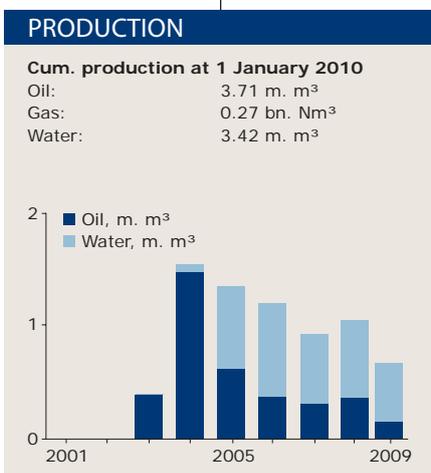


Figure 8-6 The Nini Field Data

FIELD DATA		At 1 January 2010
Prospect:	Cora	
Location:	Blocks 5504/11 and 12	
Licence:	Sole Concession	
Operator:	Mærsk Olie og Gas AS	
Discovered:	1968	
Year on stream:	1984	
Gas-producing wells:	22	
Oil-/Gas-prod. wells:	28	
Producing/Inj. wells:	18	
Water depth:	37-40 m	
Field delineation:	177 km ²	
Reservoir depth:	2,000 m	
Reservoir rock:	Chalk	
Geological age:	Danian and Upper Cretaceous	

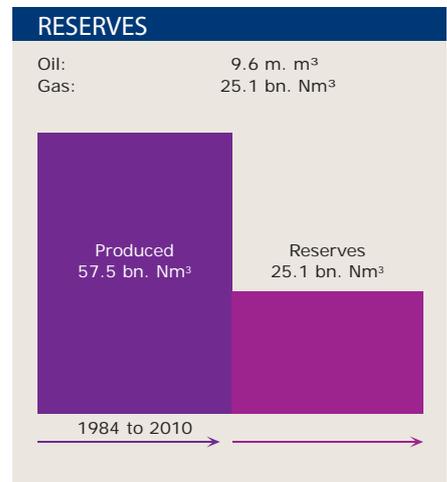
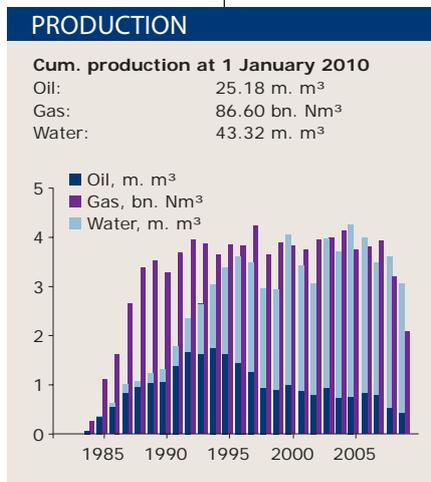


Figure 8-7 The Tyra Field Data

Recovery from both the Harald East and the Harald West reservoir takes place by gas expansion, with a moderate, natural influx of water into the reservoir.

Production from the Harald Field is based on the aim of optimizing the production of liquid hydrocarbons in the Tyra Field. By maximizing the drainage from the other gas fields, gas drainage from Tyra is minimized.

8-3-5 The Nini Field

The Nini Field was discovered in 2000, and production from the field started from an unmanned satellite platform to the Siri Field in 2003. DONG Energy is the operator.

The Nini accumulation is defined by a combined structural and stratigraphic trap, the anticlinal structure being induced through salt tectonics. The reservoir consists of sands deposited in the Siri Fairway. The field comprises more or less well-defined accumulations.

The production strategy is to maintain reservoir pressure by means of water injection. The gas produced is injected into the Siri Field.

The Nini Field is a satellite development to the Siri Field with one unmanned wellhead platform with a helideck. The unprocessed production is transported through a 14" multiphase pipeline to the Siri platform where it is processed and exported to shore via tanker. Injection water and lift gas are transported from the Siri platform to the Nini platform through a 10" pipeline and a 4" pipeline, respectively.

On 29 January 2008, the DEA approved the establishment of a new unmanned wellhead platform in the eastern part of the Nini Field.

This platform, currently under establishment, is called Nini East. The platform is similar to the Nini platform and will be provided with a helideck. The unprocessed production from Nini East will be sent to Siri via Nini. Siri will supply Nini East with injection water and lift gas via the Nini platform.

8-3-6 The Tyra Field

A development plan approved in 1999 provided for the drilling of a number of gas wells targeting the Danian reservoir. Operated by Maersk Oil & Gas AS, the wells were to be drilled successively, as and when required, the number and location to be currently optimized based on experience from the field.

The Tyra Field is an anticlinal structure created by tectonic uplift. The accumulation consists of free gas containing condensate, overlying a thin oil zone. The reservoir is only slightly fractured.

The Tyra Field acts as a gas production buffer so as not to deteriorate condensate and oil production conditions by reducing the reservoir pressure at too early a stage. Thus, increased gas production from DUC's other fields, in particular the Harald and Roar gas fields, optimizes the recovery of liquid hydrocarbons from the Tyra Field.

FIELD DATA		At 1 January 2010
Prospect:	Bo/North Jens	
Location:	Blocks 5504/7 and 11	
Licence:	Sole Concession	
Operator:	Mærsk Olie og Gas AS	
Discovered:	1977 (Bo)	
	1985 (North Jens)	
Year on stream:	1993 (North Jens)	
	2007 (Bo)	
Oil-producing wells:	17	
Gas-producing wells:	2	
Water depth:	38 m	
Field delineation:	110 km ²	
Reservoir depth:	2,000 m	
	(Upper Cretaceous)	
	2,600 m	
	(Lower Cretaceous)	
Reservoir rock:	Chalk	
Geological age:	Danian, Upper and Lower Cretaceous	

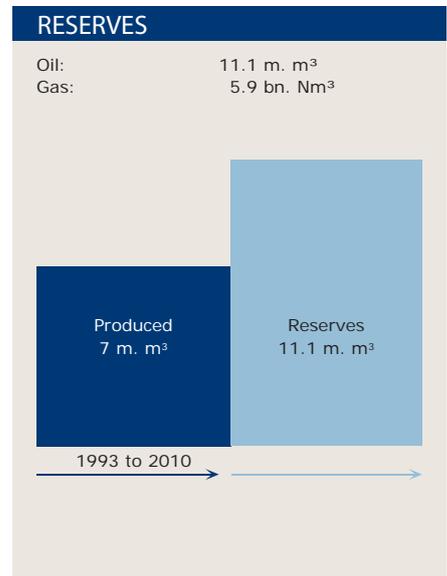
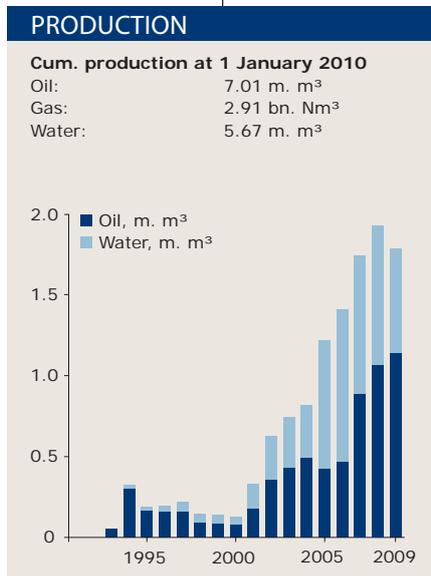


Figure 8-8 The Valdemar Field Data

8-3-7 The Valdemar Field

The Valdemar Field consists of a northern reservoir called North Jens and a southern reservoir called Bo, which are both anticlinal chalk structures associated with tectonic uplift.

The Valdemar Field comprises several separate accumulations. Oil and gas have been discovered in Danian/Upper Cretaceous chalk, and large volumes of oil have been identified in Lower Cretaceous chalk. The extremely low-permeable layers in the Lower Cretaceous chalk possess challenging production properties in some parts of the Valdemar Field, whereas the properties of the Upper Cretaceous reservoirs are comparable to other Danish fields like Gorm and Tyra.

In the Bo area, it has turned out that other parts of the Lower Cretaceous have better production properties. This has led to the development of the Bo reservoir.

The production of oil is based on natural depletion. The development of a production method based on long horizontal wells with numerous sand-filled, artificial fractures has made it possible to exploit the Lower Cretaceous reservoir commercially. In addition, recovery takes place from Danian/Upper Cretaceous layers.

8-3-8 The South Arne field

South Arne is an anticlinal structure, induced through tectonic uplift, causing fractures in the chalk. The structure contains oil with a relatively high content of gas.

The production of hydrocarbons is based on pressure support from water injection.

FIELD DATA		At 1 January 2009
Location:	Blocks 5604/29 and 30	
Licence:	7/89	
Operator:	Hess Denmark ApS	
Discovered:	1969	
Year on stream:	1999	
Producing wells:	12	
Water-injection wells:	7	
Water depth:	60 m	
Field delineation:	93 km ²	
Reservoir depth:	2,800 m	
Reservoir rock:	Chalk	
Geological age:	Danian Cretaceous	

FIELD DATA		At 1 January 2010
Location:	Blocks 5604/29 and 30	
Licence:	7/89	
Operator:	Hess Denmark ApS	
Discovered:	1969	
Year on stream:	1999	
Producing wells:	12	
Water-injection wells:	7	
Water depth:	60 m	
Field delineation:	93 km ²	
Reservoir depth:	2,800 m	
Reservoir rock:	Chalk	
Geological age:	Danian and Upper Cretaceous	


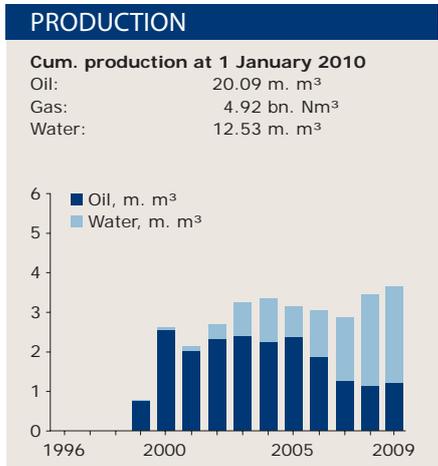


Figure 8-9 The South Arne Field Data

Figure 8-10 A map over the Danish oil and gas fields in the north sea



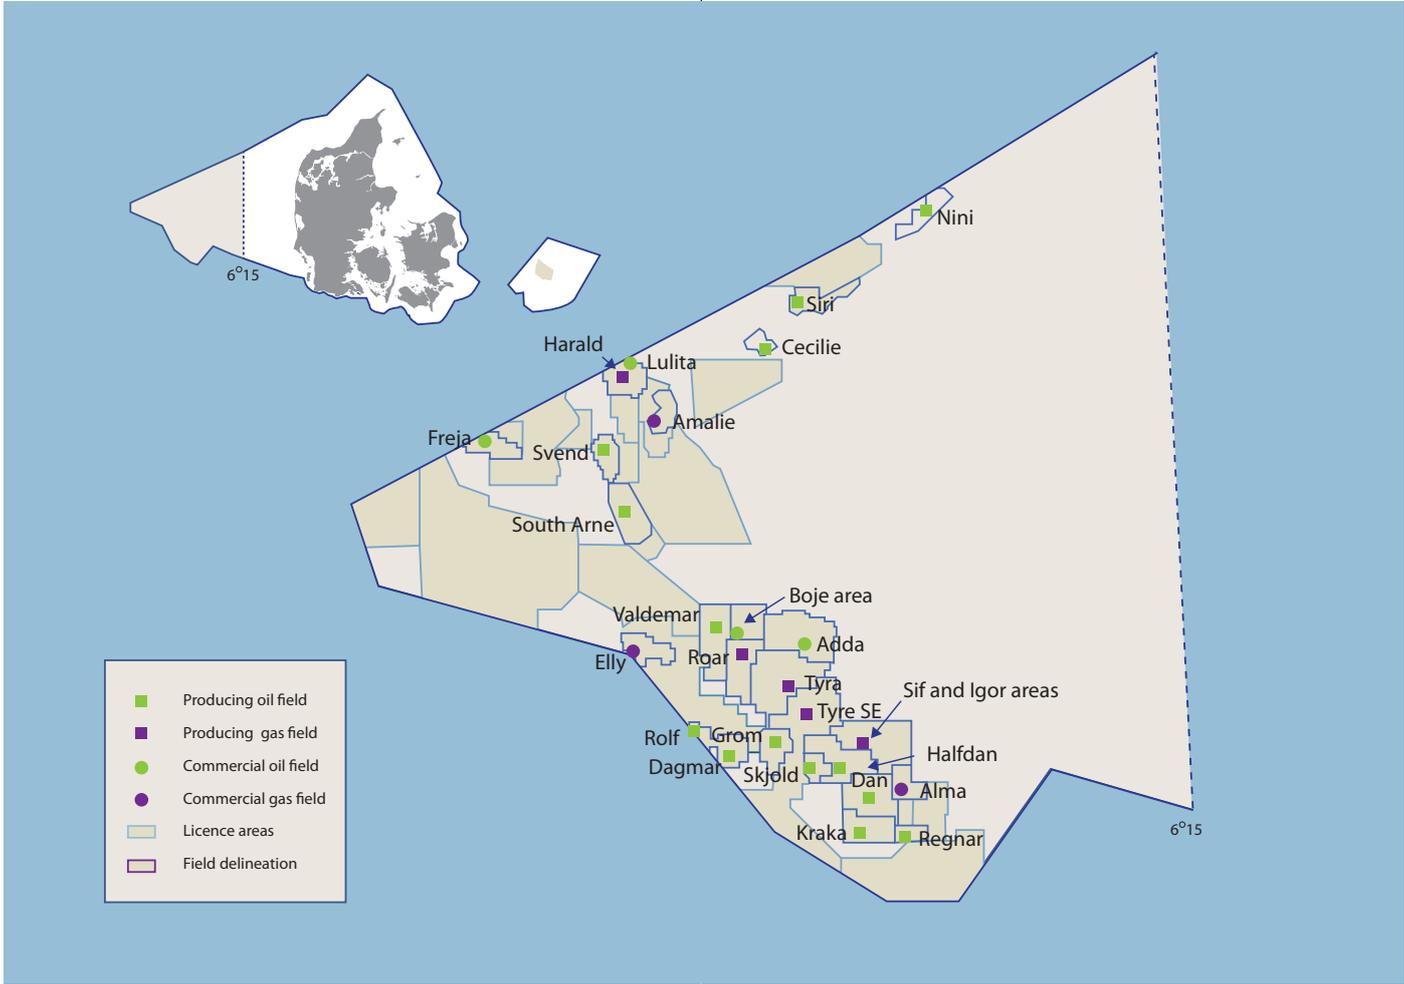

Chapter 9

Upstream and Downstream Logistics

9-1 Why Logistics matter

The incorporation of logistics management is hugely beneficial to any company. Smoother flow of operations can be achieved through this incorporation.

To maximize profit in any company, it becomes a must to know and understand all the processes that it is involved in from the very start of the supply chain right down to its end. This is precisely why there is a need to implement effective logistics management in the company. This actually pertains to the organized movement of resources, materials, and people in the enterprise so that a coherent and smooth flow may be implemented from start to finish.

Logistics was once associated with military operations; however, it eventually evolved in terms of etymology and is now used in the business world, covering activities and procedures that involve any enterprise.

Figure 9.1 – Upstream and downstream logistics.


9-2 Upstream and Downstream Logistics

The offshore industry distinguishes between upstream and downstream logistics. The offshore industry is mainly concerned with the upstream side of operations, but considerations must often be taken to the downstream side, hence both sides are treated in this chapter.

Cf. figure 9.1, upstream operations consist of exploration, geological evaluation, and the testing and drilling of potential oilfield sites; that is, all of the procedures necessary to get oil out of the ground and also the subsequent installation, operation and maintenance of the oil producing platform.

Downstream operations include pipelining crude oil to refining sites, refining crude into various products, and pipelining or otherwise transporting products to wholesalers, distributors, or retailers.

Both upstream and downstream operations provide large logistical challenges that will be described in details in this chapter.

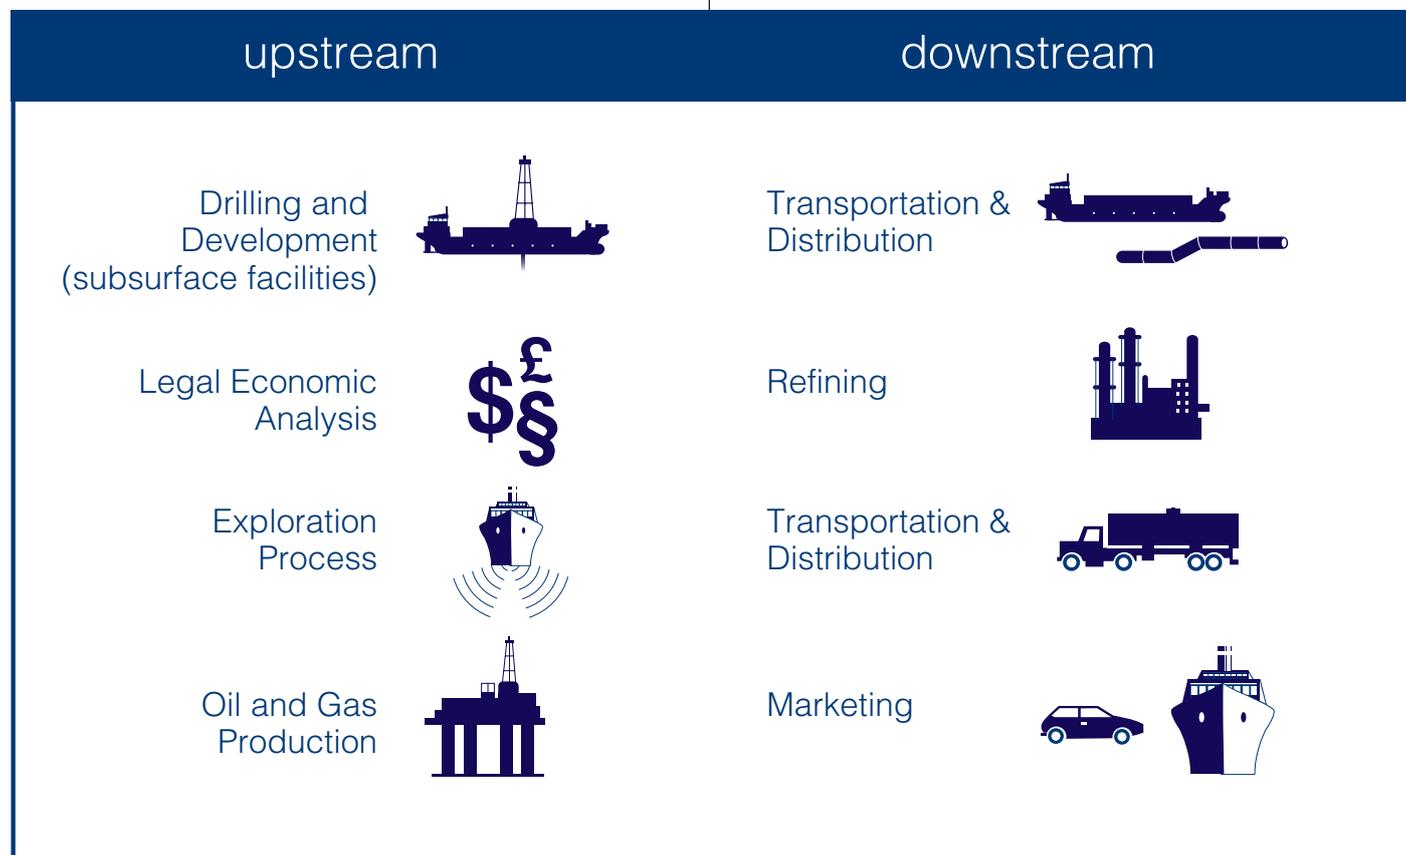

Upstream and Downstream Logistics

9-2-1 Logistics upstream

Upstream offshore installations, whether they be oil and gas installations or offshore wind farms, provide a complex environment for logistics. Providing resources to offshore personnel, such as water flooding additives, food and drinking water, spare parts, new offshore installations, the list is endless of the various material, equipment and personnel, being transported daily to and from the Danish economic zone.

Esbjerg Harbour in Denmark is the 3rd largest offshore harbour in Europe after Aberdeen and Stavanger. A host of subcontractors, service companies and sub-suppliers are based at the harbour. Drilling rigs and production platforms are in constant need of supply. There are also facilities for transport of wind turbines which require broad quay areas and specialized ships. Specialized ships are in service for transporting equipment and supplies to the offshore installations.

At the airport, helicopters transport personnel and supplies, while airplanes connect Aberdeen and other destinations to the offshore supply chain.

The complexity of offshore logistics can be seen in the figure below where the supply chain is dependent on all agents working together:

A break in the chain can lead to a complete halt in the supply system.

Figure – 9.3 Port of Esbjerg - Denmark

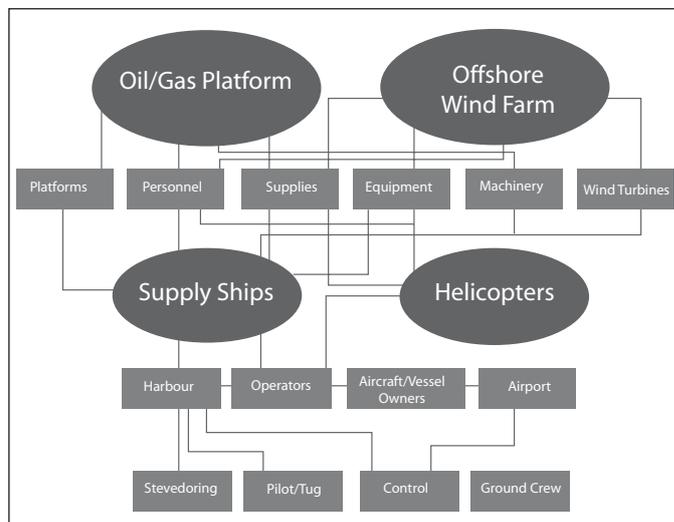


Figure – 9.2 Offshore logistics.

9-2-2 Logistics downstream

In a variety of ways everybody are users of petroleum products. Between the refinery or the petrochemical plant, where heating oil, diesel, petrol, gas and later petrochemical products are produced, and the end user, there is a distribution network responsible for getting these products to their final destination. The objective of petroleum logistics is to make the right product available, at the right time, in the right place, at the lowest cost and in optimum conditions of safety and security and with respect for the environment.

In all countries, the logistics operation comprises the same stages: supply, storage, transport and delivery of products. This ensures that all products are constantly available to meet the needs of all users, be they private, public or industrial.

9-3 Global Patterns of Oil Trade

9-3-1 Oil Trade: Highest Volume, Highest Value

On a worldwide basis there is more trade in oil than in anything else. This is true whether trade is measured by the volume of the product moved, by its value, or by the carrying capacity required to move it.

Each parameter is important for different reasons. Volume provides insights about whether markets are over or under supplied, and whether the infrastructure is adequate to accommodate the required flow. Value allows governments and economists to assess patterns of international trade, balance of trade and balance of payments. Carrying capacity allows the shipping industry to assess how many tankers are required and on which routes. Transportation and storage play a crucial role here. They are not just the physical link between importers and exporters and, therefore, between producers and refiners, refiners and marketers, and marketers and consumers; their associated costs are a primary factor in determining the pattern of world trade.

9-3-2 Distance: The Nearest Market first

Generally, crude oil and petroleum products are sold to markets that provide the highest profit to the supplier. All things being equal, oil is moved to the nearest market in the first instance. In this situation transportation costs are lowest and, therefore, provide the supplier with the greatest net revenue, or in oil market terminology, the highest netback. If all the oil is not sold here, the remainder is moved on to the next closest market. This process is repeated, transportation costs increasing progressively with each new market, until all the oil has been placed.

9-3-3 Quality, Industry Structure, and Governments

In practice however, trade flows do not always follow the simple “nearest first” pattern. Refinery configurations, variations in the product demand of the different refined products, and product quality specifications and politics can alter the rankings of markets. Specific grades of oil are valued differently in different markets.

Thus, a low sulphur diesel is worth more in the United States, where the maximum allowable sulphur is 500 ppm, than in Africa, where the maximum can be 10-20 times higher. Similarly, African crudes, low in sulphur, are worth relatively more in Asia, where they may allow a refiner to meet tighter sulphur limits in the region without having

to invest in expensive upgrading of the refinery. Such differences in valuing quality can be more than sufficient to overcome the disadvantage of increased transportation costs, as the relatively recent establishment of a significant trade in African crudes with Asia shows.

Government policies such as tariffs can also be responsible for oil being moved to markets that are not governed by the proximity principle.

9-3-4 Crude versus Products

Crude oil dominates the world oil trade. Risk related economics clearly favour establishing refineries close to consumers rather than near the wellhead. This policy takes maximum advantage of the optimum economy provided by large ships, especially as local quality specifications increasingly fragment the product market. It maximizes the refiner’s ability to tailor the product output to the short-term surges of the market, such as those caused by weather, equipment failure, etc. In addition, this policy also guards against the very real risk of governments imposing selective import restrictions to protect their domestic refining sector.

Upstream and Downstream Logistics

9-4 Transportation of Oil and Gas

The largest quantities of oil and gas discovered are to be found in developing countries, far from the major consumers. These producer countries easily meet their own needs and export the greater part of their production.

On the other hand, developed countries are major energy consumers, and far from being self-sufficient in oil and gas are actually hydrocarbon importers. Even in major developed hydrocarbon producing countries, production zones are often remotely situated in relation to the centers where crude oil and gas are processed.

As a result of this enormous quantities of oil and gas have been transported all over the world by sea and on land for several decades now.

9-4-1 Oil Transportation and Environment

Whether oil is transported from production sites to refineries by land or by sea, the main issues are those of safety, security and respect for the environment. At sea, everything must be done to avoid pollution, not only accidental oil spills but also the deliberate discharging of polluting products such as residue from tank and bilge cleaning. On land the state of oil pipelines must be kept under constant surveillance and damaged equipment replaced. Enormous quantities of transported oil are not used immediately. The same is true for some of the refinery end products. Storage facilities ensuring total safety and security must therefore be available to accommodate both these situations.

9-4-1-1 Maritime Transport

The quantity of oil transported by petrol tankers is enormous: 1.5 to 1.9 billion t annually over the last 20 years, figure 9.5 illustrate the oil tanker. Comparable figures were 500 million t in 1960, 100 million t in 1935. Depending on the year and expressed in tons, oil represents between 33-50% of the total maritime commerce worldwide. Tankers have a wide range of capacities and measured in tons of crude are classified according to this. The capacity of the total petroleum fleet is around 280 million t.

The main transport routes of crude oil leave the Middle East for Europe and the United States via the Cape of Good Hope in South Africa, or alternatively via the Suez canal, if the ship is not too large. Other routes to the Far East (Japan, China, and South Korea) exist via the Strait of Malacca (between Sumatra and Malaysia). In a not so distant future a route via the Arctic will perhaps be possible due to melting of the ice

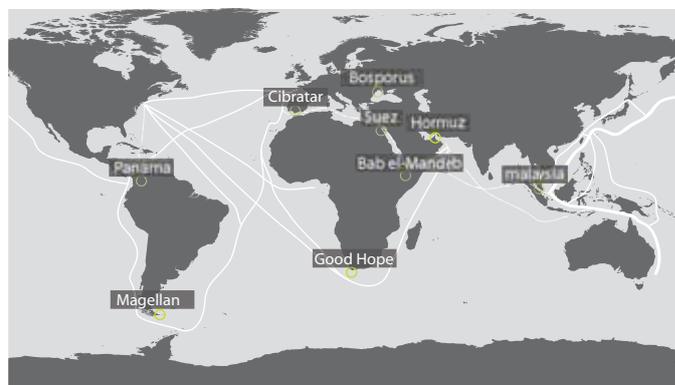


Figure 9.4 – Main Routes for Transport of Crude Oil.

caps. The journey from the Middle East to Europe (i.e. from loading of crude oil to delivery) takes a tanker 15-30 days.

Other routes exist for the transport of refined products, generally shorter, within European waters or longer for trade between Europe and the United States or Europe and Asia. Transport costs fluctuate considerably according to supply and demand and the time of the year.

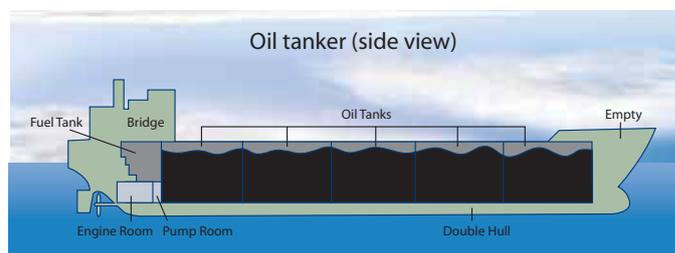


Figure 9.5 Oil tanker

9-4-1-2 Oil Transportation by Land

In the North Sea a large network of subsea pipelines transport the crude directly to onshore tank farms in United Kingdom, Norway and Denmark respectively, from where other pipelines transport the crude to refineries situated inland and handle finished products coming out of refineries and destined for major centers of consumption. The oil pipelines are large diameter tubes that can transport large quantities of oil.

9-5 Oil Storage in Tank Farms

The crude oil is stocked in tanks of varying size, with safety and security being the main concerns of those managing these centers.

While fire safety is high on their priority list, the prevention of pollution to land areas and water tables through leakages is also very important. To fulfill these requirements there are regular inspections of the condition of the tanks and control of their resistance to corrosion.

9-6 Gas Transport and Supply

By and large, the problems of transport and storage of gas are the same as for oil. Producer and consumer countries are far apart, and gas has to be transferred from one to the other. In detail however, things are quite different. Pipelines are preferred whether over land or under water.

Unlike oil, gas is in a gaseous state at normal pressures and temperatures. This means that, for the same quantity of energy, it occupies a volume 600 times greater than that of oil. Therefore, there is no question of chartering vessels to transport it in the gaseous state.

The most usual method of transport is therefore by pipelines through which gas is conveyed under high pressure. There are underwater gas pipelines, such as those that link the Danish gas fields to European terminals and of course, overland gas pipelines like those that bring Russian gas to the European Union. These pipelines are not visible: for reasons of safety and security they are buried underground. Compression plants, positioned at regular intervals along the network, convey the compressed gas along the pipelines.

But in certain cases the construction of gas pipelines is technically impossible or too expensive, for example in transferring Nigerian gas to Europe or gas from Qatar to Japan. To resolve this problem, a method of maritime transport based on the liquefaction of the gas (LNG, liquefied natural gas) has been introduced.

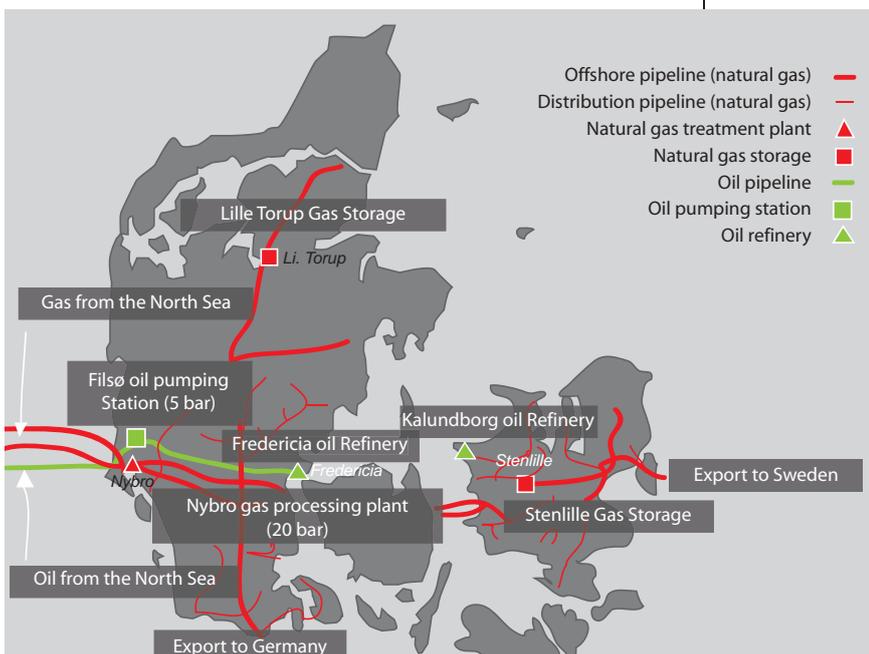


Figure 9.6 – Onshore oil and gas transmission system in Denmark.

Upstream and Downstream Logistics

9-7 Gas Storage Facilities

Gas consumption fluctuates over the year with the largest consumption during the winter. The maximum supply of natural gas from the North Sea fields is limited to approximately 22 to 24 million Nm³/day. The gas consumption on a cold winter day may amount to approximately 30 to 33 million Nm³/day. In order to handle the difference between production and consumption, it is necessary to be able to store the surplus gas from the summer production to the larger winter consumption. Therefore, in connection with establishing the Danish natural gas grid, 2 gas storage facilities were established to manage this load equalisation.

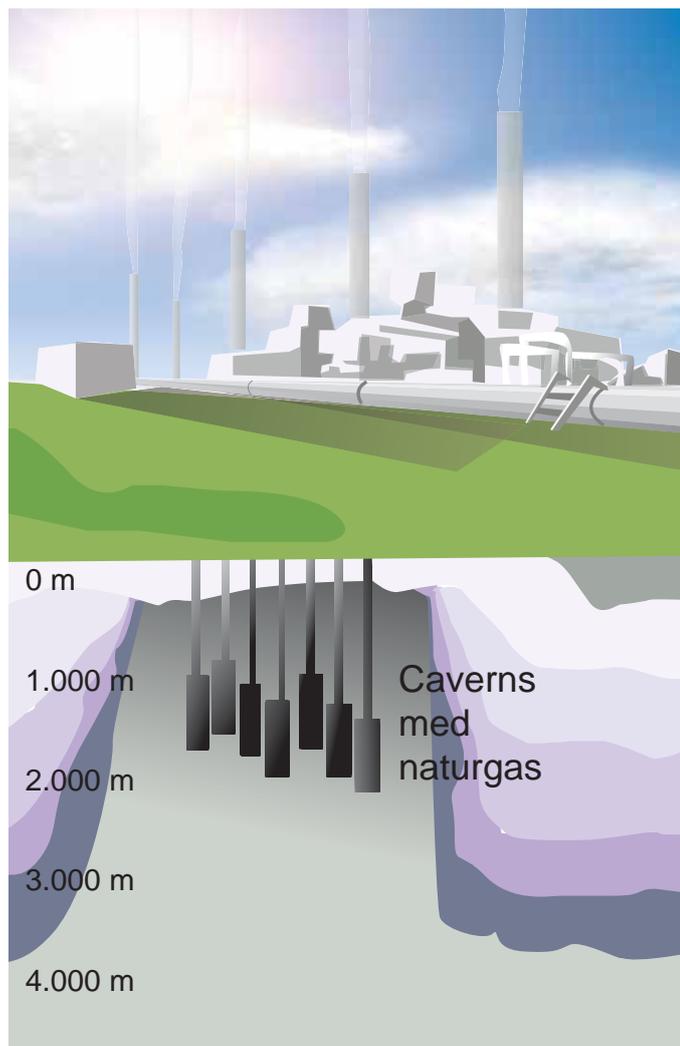


Figure 9.7 – Storage in Gas Cavities.

Lille Torup gas storage (Jutland):

- A total volume of 710 million Nm³ natural gas distributed on 7 natural salt caverns
- Working gas at 441 million Nm³
- Hydraulic trains with a total capacity of 10.8 million Nm³/24 hrs
- Injection trains with a total capacity of 3.6 million Nm³/24 hrs

Stenlille gas storage (Zealand):

- A total volume of 1,160 million Nm³ natural gas
- Working gas at 440 million Nm³
- Hydraulic trains with a total capacity of 10.8 million Nm³/24 hrs
- Injection trains with a total capacity of 2.9 million Nm³/24 hrs

Chapter 10

Downstream

10-1 Downstream

The downstream oil sector is a term normally used to refer to the refining of crude oil and the selling and distribution of products resulting from crude.

The petroleum industry is often divided into 3 major sections: upstream, midstream and downstream. However, midstream operations are usually simply included in the downstream category.

The upstream industry finds and produces crude oil and natural gas and is sometimes known as the Exploration and Production (E&P) sector.

The midstream industry processes, stores, markets and transports commodities such as crude oil, natural gas, Natural Gas Liquids and sulphur.

The downstream industry includes oil refineries, petrochemical plants, petroleum product distributors, retail outlets and natural gas distribution companies. The downstream industry has an important influence on consumers through thousands of products such as petrol, diesel, jet fuel, heating oil, asphalt, lubricants, synthetic rubber, plastics, fertilizers, antifreeze, pesticides, pharmaceuticals, natural gas and propane.

10-2 Oil Refinery operation

Because crude oil is made up of a mixture of hydrocarbons, the first and basic refining process is aimed at separating crude oil into its “fractions”, broad categories of its component hydrocarbons. Crude oil is heated and passed through a distillation column where different products boil off and are recovered at different temperatures.

The lighter products such as liquid petroleum gases (LPG), naphtha, and so-called “straight run” petrol are recovered at the lowest temperatures. Medium weight distillates like jet fuel, kerosene and distillates such as home heating oil and diesel fuel are recovered at higher temperatures. Finally, the heaviest products (residuum or residual fuel oil) are recovered, sometimes at temperatures of over 538°C.

Raw or unprocessed crude oil is not very useful in its natural state. Although “light, sweet” oil has been used directly as burner fuel for steam vessel propulsion, the lighter elements form explosive vapors in the fuel tanks. Therefore, the oil needs to be separated into its components and refined before being used as fuel and lubricants and before some of the by-products can be used in petrochemical processes to form materials such as plastics and foams. Petroleum fossil fuels are used in ship, motor vehicle and aircraft engines. Different types of hydrocarbons have different boiling points which mean they can be separated by distillation. Since the lighter liquid elements are in great demand for use in internal combustion engines, a modern refinery will convert heavy hydrocarbons and lighter gaseous elements into these products of higher value using complex and energy intensive processes. Oil can be used in many different ways because it contains hydrocarbons of varying molecular masses, structures and lengths such as paraffins, aromatics, naphthenes, alkenes, dienes, and alkynes. Hydrocarbons are molecules of varying length and complexity composed of only hydrogen and carbon atoms. The variety in structure is associated with different properties and thereby different uses. The aim of the oil refinement process is to separate and purify these. Once separated and purified of all contaminants and impurities, the fuel or lubricant can be sold without further processing.

Smaller molecules such as isobutane and propylene or butylenes can be recombined to meet specific octane requirements of fuels by processes such as alkylation or less commonly, dimerization. The octane grade of petrol can also be improved by catalytic reforming, a process which removes hydrogen from the hydrocarbons to produce aromatics, which have much higher octane ratings. Intermediate products such as gasoils can even be reprocessed so that heavy, long-chained oils can be broken into lighter short-chained ones, by various forms of cracking such as Fluid Catalytic Cracking, Thermal Cracking, and Hydro Cracking. The final step in petrol production is the blending of fuels with different octane ratings, vapor pressures, and other properties to meet product specifications.

Downstream

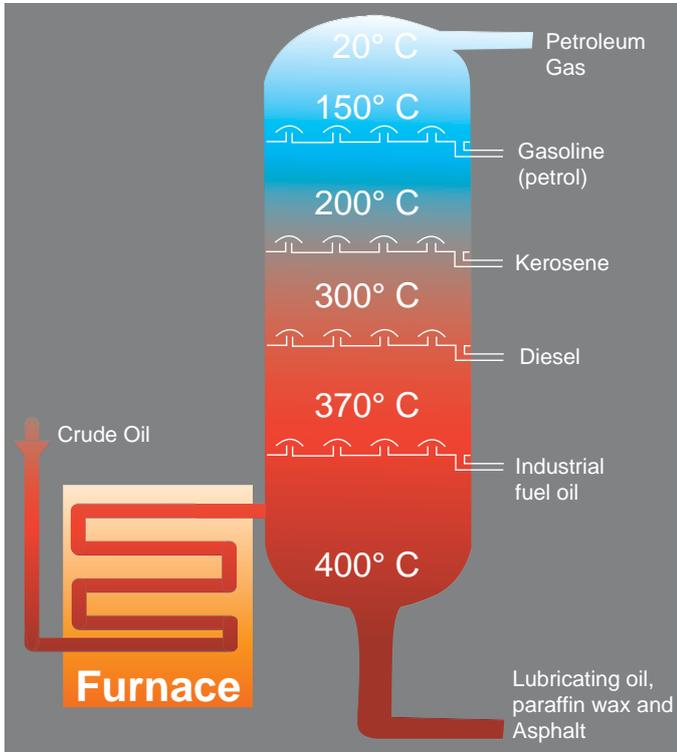


Figure 10.1 - Fractional distillation of crude oil.

Crude oil is separated into fractions by fractional distillation. The fractionating column is cooler at the top than at the bottom, because the fractions at the top have lower boiling points than the fractions at the bottom. The heavier fractions that emerge from the bottom of the fractionating column are often broken up (cracked) to make more useful products. All of the fractions are subsequently routed to other refining units for further processing.

10-2-1 Products of Oil Refineries

Most products of oil processing are usually grouped into 3 categories: light distillates (LPG, gasoline, naphtha), middle distillates (kerosene, diesel), heavy distillates and residuum (fuel oil, lubricating oils, wax, tar). This classification is based on the way crude oil is distilled and separated into fractions (called distillates and residuum) as can be seen in the above drawing:

10-2-1-1 Light distillates

LPG

Liquified petroleum gas (also called liquified petroleum gas, Liquid Petroleum Gas, LPG, LP Gas, or autogas) is a mixture of hydrocarbon gases used as a fuel in heating appliances and in vehicles. It is re-

placing chlorofluorocarbons as an aerosol propellant and a refrigerant making these more environment friendly and thus reducing damage to the ozone layer. Varieties of LPG bought and sold include mixes that are primarily propane, mixes that are primarily butane, and mixes including both propane and butane, depending on the season, in winter more propane, in summer more butane. Propylene and butylenes are usually also present in small concentrations. A powerful odorant, ethanethiol, is added so that leaks can be easily detected. LPG is manufactured during the refining of crude oil, or extracted from oil or gas streams as they emerge from the ground. At normal temperatures and pressures, LPG evaporates. Because of this, LPG is supplied in pressurized steel bottles. In order to allow for thermal expansion of the contained liquid, these bottles are not filled completely, usually between 80% and 85% of their total capacity. The ratio between the volumes of the vaporized gas and the liquefied gas varies depending on composition, pressure and temperature, but is typically around 250:1. The pressure, at which LPG becomes liquid, called its vapor pressure, varies likewise depending on composition and temperature. Thus it is approximately 2.2 bars for pure butane at 20°C, and approximately 22 bars for pure propane at 55°C. LPG is heavier than air, and therefore flows along floors and tends to settle in low-lying areas, such as basements. This can cause ignition or suffocation hazards if not dealt with.

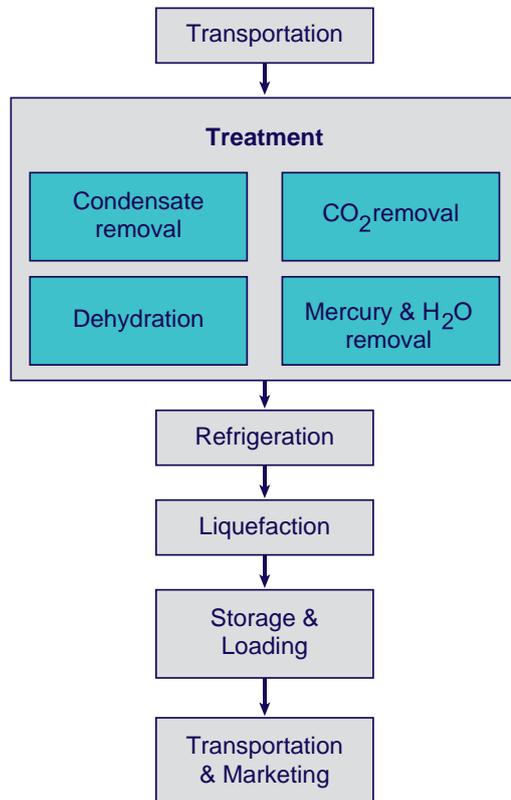


Figure 10.2 - A typical LNG process

Gasoline

Gasoline, also called petrol, is a petroleum-derived liquid mixture consisting primarily of hydrocarbons and enhanced with benzene or iso-octane to increase octane ratings. It is used as fuel in internal combustion engines. In Denmark the term “benzin” is used. Most Commonwealth countries, with the exception of Canada, use the word “petrol” (abbreviated from petroleum spirit). The term “gasoline” is commonly used in North America where it is usually shortened in colloquial usage to “gas.” This should be distinguished from genuinely gaseous fuels used in internal combustion engines such as liquified petroleum gas. The term mogas, short for motor gasoline distinguishes automobile fuel from aviation gasoline, or avgas.

Naphtha

Naphtha (aka petroleum ether) is a group of various liquid hydrocarbon intermediate refined products of varying boiling point ranges from 20 to 75°C, which may be derived from oil or from coal tar, and perhaps other primary sources. Naphtha is used primarily as feedstock for producing a high octane gasoline component via the catalytic reforming process. Naphtha is also used in the petrochemical industry for producing olefins in steam crackers and in the chemical industry for solvent (cleaning) applications. Naphthas are volatile, flammable and have a specific gravity of about 0.7. The generic name naphtha describes a range of different refinery intermediate products used in different applications. To further complicate the matter, similar naphtha types are often referred to by different names.

The different naphthas are distinguished by:

- Density (g/ml or specific gravity)
- PONA, PIONA or PIANO analysis, which measures (usually in volume % but can also be in weight %)
- Paraffin content (volume %)
- Isoparaffin content (only in a PIONA analysis)
- Olefins content (volume %)
- Naphthenes content (volume %)
- Aromatics content (volume %)

Generally speaking, less dense (“lighter”) naphthas will have higher paraffin content. These are therefore also referred to as paraffinic naphtha. The main application for these naphthas is as a feedstock in the petrochemical production of olefins. This is also the reason they are sometimes referred to as “light distillate feedstock” or LDF (these naphtha types can also be called “straight run gasoline”/ SRG or “light virgin naphtha”/LVN).

When used as feedstock in petrochemical steam crackers, the naphtha is heated in the presence of water vapour and the absence of oxygen or air, until the hydrocarbon molecules fall apart. The primary products of the cracking process are olefins (ethylene ethene, propylene/

propene and butadiene) and aromatics (benzene and toluene). These are used as feedstocks for derivative units that produce plastics (polyethylene and polypropylene for example), synthetic fiber precursors (acrylonitrile), industrial chemicals (glycols for instance).

The “heavier” or rather denser types are usually richer in naphthenes and aromatics and therefore also referred to as N&A’s. These can also be used in the petrochemical industry but more often are used as a feedstock for refinery catalytic reformers where they convert the lower octane naphtha to a higher octane product called reformat. Alternative names for these types are Straight Run Benzene (SRB) or Heavy Virgin Naphtha (HVN). Naphthas is also used in other applications such as:

- The production of petrol/motor gasoline (as an unprocessed component)
- Industrial solvents and cleaning fluids
- An oil painting medium
- An ingredient in shoe polish

10-2-2-2 Middle distillates

The middle distillates consist of kerosene and diesel.

Kerosene

Kerosene is obtained from the fractional distillation of petroleum at 150°C and 275°C (carbon chains in the C12 to C15 range). Typically, kerosene directly distilled from crude oil requires treatment, either in a Merox unit or a hydrotreater, to reduce its sulphur content and its corrosiveness. Kerosene can also be produced by a hydrocracker being used to upgrade the parts of crude oil that would otherwise be good only for fuel oil. Kerosene was first refined in 1846 from a naturally-occurring asphaltum by Abraham Gesner, who thereby founded the modern petroleum industry. At one time the fuel was widely used in kerosene lamps and lanterns. These were superseded by the electric light bulb and flashlights powered by dry cell batteries. The use of kerosene as a cooking fuel is mostly restricted to some portable stoves for backpackers and to less developed countries, where it is usually less refined and contains impurities and even debris. The widespread availability of cheaper kerosene was the principal factor in the rapid decline of the whaling industry in the mid to late 19th century, as its main product was oil for lamps.

Diesel

Diesel or diesel fuel is a specific fractional distillate of fuel oil that is used as in the diesel engine invented by German engineer Rudolf Diesel. The term typically refers to fuel that has been processed from petroleum. However there is an increasing tendency to develop and adapt alternatives such as biodiesel or Biomass To Liquid (BTL) or Gas To Liquid (GTL) diesel that are not derived from petroleum.

Downstream

Diesel is a hydrocarbon mixture, obtained in the fractional distillation of crude oil between 200°C and 350°C at atmospheric pressure. The density of diesel is about 850 grams per liter whereas gasoline (British English: petrol) has a density of about 720 g/L, about 15% less.

When burnt, diesel typically releases about 40.9 megajoules (MJ) per liter, whereas gasoline releases 34.8 MJ/L, about 15% less. Diesel is generally simpler to refine than gasoline and often costs less. Also, due to its high level of pollutants, diesel fuel must undergo additional filtration. Diesel-powered cars generally have a better fuel economy than equivalent gasoline engines and produce less green-house gas pollution. Diesel fuel often contains higher quantities of sulfur which must be removed as a separate process at the refinery.

Diesel is immiscible with water. Petroleum-derived diesel is composed of about 75% saturated hydrocarbons (primarily paraffins including n, iso, and cycloparaffins), and 25% aromatic hydrocarbons (including naphthalenes and alkylbenzenes).

10-2-2-3 Heavy distillates and residuum

The heavy distillates consist of fuel oil, lubricating oils, wax, tar, asphalt, and petroleum coke.

Fuel oil

Fuel oil is a fraction obtained from petroleum distillation, either as a distillate or a residue. Broadly speaking, fuel oil is any liquid petroleum product that is burned in a furnace or boiler to generate heat or used in an engine to generate power, with the exception of oils having a flash point of approximately 40°C and oils burned in cotton or wool-wick burners. In this sense, diesel is a type of fuel oil.

Fuel oil is made of long hydrocarbon chains, particularly alkanes, cycloalkanes and aromatics. Factually and in a stricter sense, the term fuel oil is used to indicate the heaviest commercial fuel (heavier than petrol or naphtha) that can be obtained from crude oil.

Lubricating oils

Lubricants are an essential part of modern machinery. Everything from computer hard disk drives to the Airbus A380 requires lubrication of its moving parts.

A lubricant (colloquially, lube, although this may also refer to personal lubricants) is a substance (usually a liquid) introduced between 2 moving surfaces to reduce the friction and wear between them by providing a protective film.

Typically lubricants contain 90% base oil (most often petroleum fractions, called mineral oils) and less than 10% additives. Additives deliver reduced friction and wear, increased viscosity, improved vis-

cosity index, resistance to corrosion and oxidation, aging or contamination, etc.

Lubricants perform the following key functions:

- Keep moving parts apart
- Reduce friction
- Transfer heat
- Carry away contaminants and debris
- Transmit power
- Protect against wear
- Prevent corrosion

GROUP	SATURATES (WT %)	SULPHUR (WT %)	VISCOSITY INDEX (VI)
I	<90	>0.03	80 ≤ VI ≤ 120
I+	<90	>0.03	103 ≤ VI ≤ 108
II	≤90	≤0.03	80 ≤ VI < 120
II+	≤90	≤0.03	113 ≤ VI ≤ 119
III	≤90	≤0.03	VI > 120
III+	≤90	≤0.03	VI > 140
IV - Poly alpha olefins			
V - Naphthenics, polyalkylene glycols, esters			

Table 10.1 – Groups of Mineral Oil

Industry operates with the following groups of mineral oil as base oil

Wax

Waxes include paraffin, which is a common name for a group of alkane hydrocarbons with the general formula C_nH_{2n+2} , where n is greater than 20. It is distinct from the fuel known in Britain as paraffin oil or just paraffin, which is called kerosene in American English. The solid forms of paraffin are called paraffin wax. Paraffin is also a technical name for an alkane in general, but in most cases it refers specifically to a linear or normal alkane, while branched or isoalkanes are also called isoparaffins. It mostly presents as a white, odorless, tasteless, waxy solid, with a typical melting point between 47°C and 65°C. It is insoluble in water, but soluble in ether, benzene, and certain esters. Paraffin is unaffected by most common chemical reagents, but burns readily.

Pure paraffin is an extremely good electrical insulator, with an electrical resistivity of 1017 ohm-meter. This is better than almost all other materials except some plastics (notably teflon).

Asphalt

Asphalt is also a heavy distillates, and is a sticky, black and highly viscous liquid or semi-solid that is present in most crude petroleum and in some natural deposits. Asphalt is composed almost entirely of

bitumen. There is some disagreement amongst chemists regarding the structure of asphalt, but it is most commonly modeled as a colloid, with asphaltenes as the dispersed phase and maltenes as the continuous phase.

There are 2 forms commonly used in construction: rolled asphalt and mastic asphalt. Rolled asphalt is one of the forms of road surfacing material known collectively as blacktop; another form is the (distinct) macadam, including both tar and bituminous macadam. The terms asphalt and tarmac tend to be interchanged by many, although they are distinct products.

Tar

Tar is a viscous black liquid derived from the destructive distillation of organic matter. The vast majority of tar is produced from coal as a byproduct of coke production, but it can also be produced from petroleum, peat or wood. The use of the word “tar” is frequently a misnomer. In English and French, “tar” means primarily the coal derivative, but in northern Europe, it refers primarily to the wood distillate, which is used in the flavouring of confectionary.

Tar, of which petroleum tar is the most effective, is used in treatment of psoriasis. Tar is also a disinfectant substance, and used as such. Tar was a vital component of the first sealed, or “tarmac”, roads. It was also used as a seal for roofing shingles and to seal the hulls of ships and boats. For millennia wood tar was used to waterproof sails and boats, but today sails made from waterproof synthetic textiles have eliminated the need for sail sealing.

Petroleum coke

Petroleum coke is a carbonaceous solid derived from oil refinery coker units or other cracking processes. It is a solid meaning that it has a high carbon content, and that all the volatiles have been distilled off in the refining process.

10-2-3 Safety and Environmental Concerns

Oil refineries are typically large sprawling industrial complexes with extensive piping running throughout. The refining process releases a large variety of chemicals into the atmosphere with subsequent air pollution and is accompanied by a characteristic odour. In addition to air pollution there are also wastewater concerns, definite risks of fire and explosion, and both occupational and environmental noise health hazards. The sulphur content in crude oil is removed as a separate process as the sulphur otherwise is forming sulphurous acid in the atmosphere.

In many countries the public has demanded that the government place restrictions on contaminants that refineries release. Therefore most

refineries have installed the equipment necessary to comply with the requirements of the pertinent environmental protection regulatory agencies. Environmental and safety concerns mean that oil refineries are sometimes located at some distance from major urban areas.

10-2-4 Common Process Units found in a Refinery

- Desalter Unit - washes out salt from the crude oil before it goes into the atmospheric distillation unit
- Atmospheric Distillation Unit - distills crude oil into fractions
- Vacuum Distillation Unit - further distills residual bottoms after atmospheric distillation
- Naphtha Hydrotreater Unit - desulphurizes naphtha from atmospheric distillation. Naphtha must be hydrotreated before being sent to a Catalytic Reformer Unit
- Catalytic Reformer Unit - contains a catalyst to convert the naphtha-boiling range molecules into higher octane reformat. The reformat has a higher content of aromatics, olefins, and cyclic hydrocarbons. An important byproduct of a reformer is hydrogen released during the catalyst reaction. This hydrogen is then used either in hydrotreaters and hydrocracker
- Distillate Hydrotreater Unit - desulphurizes distillate (e.g. diesel) after atmospheric distillation
- Fluid Catalytic Cracking (FCC) Unit - upgrades heavier fractions into lighter, more valuable products
- Hydrocracker Unit - upgrades heavier fractions into lighter, more valuable products.
- Coking unit - processes asphalt into petrol and diesel fuel, leaving coke as a residual product
- Alkylation unit - produces high octane component for petrol blending
- Dimerization unit - converts olefins into higher-octane gasoline blending components. For example, butenes can be dimerized into isooctane which may subsequently be hydrogenated to form isooctane
- Isomerization Unit - converts linear molecules into higher octane branched molecules for blending into petrol or feeding into alkylation units
- Steam reforming Unit - produces hydrogen for the hydrotreaters or hydrocracker.
- Liquefied gas storage units for propane and similar gaseous fuels at pressures sufficient to maintain them in the liquid form; these are usually spherical or bullet-shaped
- Storage tanks for crude oil and finished products, usually cylindrical, with some sort of vapor enclosure and surrounded by an earth berm to contain spills
- Utility units such as cooling towers for circulating cooling water, boiler plants for steam generation, and wastewater collection and treating systems to make such water suitable for reuse or for disposal.


Downstream

10-3 Petrochemicals

Petrochemicals are chemical products made from raw materials of petroleum (hydrocarbon) origin.

10.3 - Schematic flow diagram of a typical oil refinery.

The 2 main classes of raw materials are olefins (including ethylene and propylene) and aromatics (including benzene and xylene isomers), both of which are produced in very large quantities, mainly by steam cracking and catalytic reforming of refinery hydrocarbons. A very wide range of raw materials used in industry (plastics, resins,

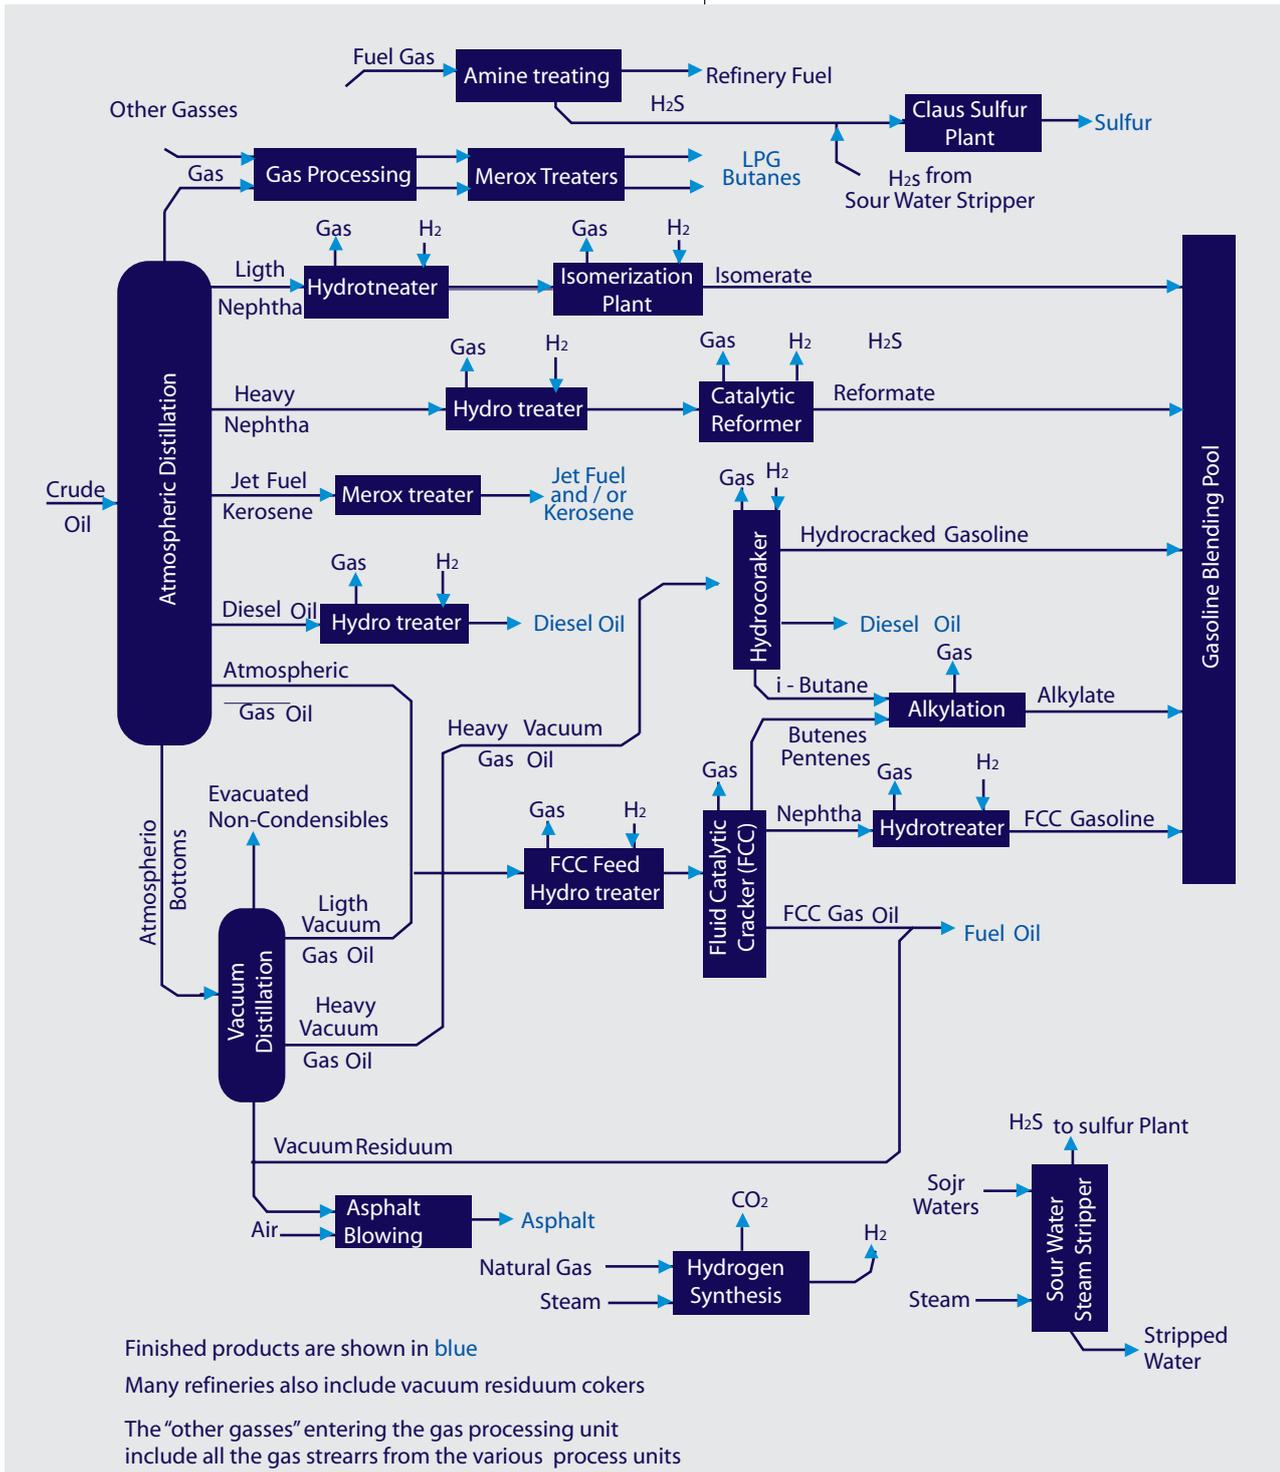

fibre, solvents, detergents, etc.) is made from these basic building blocks.

The annual world production of ethylene is 110 million t, of propylene 65 million t and of aromatic raw materials 70 million t. The largest petrochemical industries are found in Western Europe and the USA, though major growth in new production capacity is to be found in the Middle East and Asia. There is a substantial inter-regional trade in petrochemicals of all kinds.

From chewing gum to training shoes, from lipstick to throw-away bags, oil is everywhere in our daily life and results from the transformation achieved by the alchemists of modern times, the petroleum chemists.

The Petrochemical Industry and plastic products in particular are sometimes criticized, but without their colours, which liven up our favourite objects like our CDs and DVDs, our snowboarding anorak, we would live almost in black and white! Indeed, the products derived from oil produced by the petroleum chemistry are numerous and varied. They contribute to our comfort, our pleasure and our safety.

For people born after 1960, these products represent so much in our everyday lives that we cannot imagine living without them. Nevertheless, their appearance in our daily life is really very recent. Old people will be able to tell you that as young children and

adolescents they grew up without knowing polyester sportswear, Nike, Adidas and Reebok training shoes, plastic bags which are so practical, and even the outer casings of mobile phones, scooters, televisions and computers. Hard to believe? However, facts speak for themselves. In 1950, consumer products resulting from the petroleum industry reached only 3 million t worldwide, half of which were plastic products. In 2000, 192 million t were produced of which 140 million t were plastics.

One could ask why these products arrived so late in the market, when the era of massive use of oil started at the beginning of the 20th century. In the 1930's, the petrol, diesel and kerosene produced in enormous quantities by refineries had guaranteed outlets: all types of vehicles. But the refiners found themselves with unimaginable quantities of a by-product, naphtha, which was unsellable and unstockable because it was inflammable and polluting. Research led to the discovery of the versatile polymerisation reaction, which has placed naphtha at the origin of the majority of products derived from oil.

Petrochemical Plants

In a petrochemical Plant the feedstock (generally natural gas or petroleum liquids) is converted into fertilizers, and/or other intermediate and final products such as olefins, adhesives, detergents, solvents, rubber and elastomers, films and fibre, polymers and resins, etc. Petrochemical plants show an infinite variety of configurations depending on the products being produced. The main categories are:



Figure 10.4 - Petrochemical plant.

Downstream

- Ethylene Plants: Ethylene is produced via steam cracking of natural gas or light liquid hydrocarbons. It is one of the main components of the resulting cracked gas mixture and is separated by repeated compression and distillation
- Fertilizer Plants: A reforming process converts the feedstock into a raw syngas which is then purified, compressed, and fed to high pressure reactors where ammonia is formed. In most cases, the ammonia synthesis plant is combined with a urea synthesis plant where the ammonia reacts at high pressure with CO_2 to form urea
- Methanol Plants and other Alcohols: High temperature steam-methane reforming produces a syngas, which then reacts at medium pressure with a suitable catalyst to produce methanol
- Plastic Production Plants: several grades of plastic materials are produced from ethylene, propylene and other monomers by means of a great variety of proprietary processes that cause polymerization to occur in the presence of suitable catalysts
- Other Petrochemical Plants: include Acetylene, Butadiene, Sulphuric Acid, Nitric Acid, Pure Terephthalic acid, Chlorine, and Ethylene Oxide/Ethylene Glycol

10-4 Transportation

Oil and Gas Pipelines

Pipeline transport is the most economical way to transport large quantities of oil or natural gas over land or under the sea.

Oil pipelines are made from steel or plastic tubes. Multi-product pipelines are used to transport 2 or more different products in sequence in the same pipeline. Usually in multi-product pipelines there is no physical separation between the different products. Some mixing of adjacent products occurs, producing interface. This interface is removed from the pipeline at receiving facilities and segregated to prevent contamination.

Crude oil contains varying amounts of wax, or paraffin, and in colder climates wax buildup may occur within a pipeline. To clear wax deposition, mechanical pigs may be sent along the line periodically. For natural gas, smaller feeder lines are used to distribute the fuel to homes and businesses.

Buried fuel pipelines must be protected from corrosion. The most economical method of corrosion control is often pipeline coating in conjunction with cathodic protection.

Oil and gas is also transported via ships. This is described in chapter 9.



Chapter 11

Decommissioning



11-1 Overview

There are many different types of offshore installations, from fixed steel platforms and large concrete gravity structures, to a variety of floating production systems and subsea completions. This infrastructure is supported by many thousands of km of pipelines at the seabed that form a complex transmission network, transferring products between offshore facilities and shore-based reception facilities. The offshore production of oil and gas deals with inherently hazardous conditions resulting in potential risks to the safety of personnel working offshore and to the environment.

Many of the offshore oil and gas facilities are now reaching the end of their productive phase, and the questions relating to shutting down production, decommissioning the production facilities and removing the redundant structures are becoming an important issues for consideration. There are number of inter-related factors that need to be addressed in developing a strategy for shutting down any specific offshore facility.

Installations include subsea equipment fixed to the marine floor and various installation rigs. There is a very strict legal framework that governs decommissioning.

Public concern is evident, and in some cases has become a significant factor in the search for the most appropriate decommissioning solutions.

One of the main difficulties with decommissioning is finding the right balance between:

- Technical Feasibility
- Environmental Protection
- Health and Safety
- Cost
- Public Opinion

The process of decommissioning is very strictly regulated by international, regional and national legislation.

The options available for decommissioning will depend on the location of the offshore facility and subsequent legislations. One of the most important steps in the decommissioning process is planning ahead.

11-2 Regulatory Framework

The distinction between the removal and disposal of disused offshore oil and gas installations is important as they come under very different types of legislative frameworks. Whilst interlinked, the legal requirements for removal are primarily concerned with safety of navigation and other users of the sea. The disposal of structures comes under the pollution prevention regulatory framework.

11-3 International Frameworks and Conventions

11-3-1 Geneva Convention

The current regulations have evolved from earlier conventions such as the 1958 Geneva Convention on the Continental Shelf that called for the total removal of all marine based structures. This international convention came into force long before deep-sea structures were ever emplaced.

11-3-2 UNCLOS

The Geneva Convention was superseded by the UN Convention on the Law of the Seas 1982 (UNCLOS), of which permits partial removal of offshore structures provided IMO criteria are met. The Convention entered into force in 1994.

11-3-3 IMO

Headquartered in London, the International Maritime Organization (IMO) sets the standards and guidelines for the removal of offshore installations worldwide. The 1989 IMO Guidelines require the complete removal of all structures in waters less 100 m (since January 1998 - previously it was 75 m) and substructures weighing less than 4,000 t. Those in deeper waters can be partially removed leaving 55 m of clear water column for safety of navigation. All new structures installed after 1 January 1998 must be designed so as to be feasible for complete removal.

11-3-4 The London (Dumping) Convention

The London Convention (LC) is based at IMO headquarters in London. The 1972 London Convention and the subsequent 1996 Protocol made provision for generic guidance for any wastes that can be dumped at sea. New guidelines - "Guidelines for the assessment of waste and other matters that may be considered for dumping" - to provide specific guidance for different classes of waste, including platforms and other man-made waste, were adopted in 2000.

11-3-5 Regional Conventions

In addition to the international legislative framework, there are a number of regional conventions which govern marine disposal in specific areas. The area that reaches from the east coast of Greenland

to the west coast of continental Europe and stretches from the Arctic down to the southern most tip of Europe at Gibraltar is governed by the Oslo and Paris (OSPAR) Convention for the Protection of the Marine Environment of the North East Atlantic. Similar conventions govern other seas such as BARCOM for the Mediterranean and HELCOM for the Baltic Sea.

11-3-6 OSPAR

OSPAR is an international convention drawn up in 1992 and which came into force in March 1998. It replaced the 1972 Oslo Convention (on dumping from ships) and the 1974 Paris Convention (on discharges from land) to protect the marine environment of the Northeast Atlantic from pollution.



Figure 11.1 - The OSPAR area

The OSPAR Convention framework works hand in glove with international legislation governing the removal of structures. Therefore, prior to February 1999, the OSPAR guidelines were only called upon for structures over the required size for total removal (ie IMO Guidelines which require all structures in waters deeper than 100 m and weighing more than 4,000 t). This accounted for most of the structures in the North Sea - some 80%.

The Torrey Canyon was the first of the big supertankers, capable of carrying a cargo of 120,000 t of crude oil, and was wrecked off the western coast of Cornwall in 1967 causing an environmental disaster. This grounding of the Torrey Canyon in 1967, and subsequent release of 117,000 t of oil with disastrous consequences for the environment,

proved to be a pivotal point for international cooperation to combat marine pollution in the North-East Atlantic. It ultimately stimulated the signature, in 1969, of the Agreement for Cooperation in Dealing with Pollution of the North Sea by Oil (the “Bonn Agreement”). The next important development in the growing general awareness of the dangers of pollution of the seas and oceans came with the “Oslo Convention”. A concrete example to remind the countries concerned that the unlimited deliberate dumping of (industrial) waste into the sea could lead to an unacceptable situation made it necessary to draw up a similar document, not dealing with the prevention of marine pollution by dumping, but instead with the prevention of marine pollution by discharges of dangerous substances from land-based sources, watercourses or pipelines. Negotiations on this topic resulted in the “Paris Convention”.

In 1992 a new Convention for the Protection of the Marine Environment of the North-East Atlantic (the “OSPAR Convention”) was founded, together with a Final Declaration and an Action Plan to guide the future work of the Commissions.

The new Convention consists of a series of provisions and, among other issues:

- 1) requires the application of:
 - a) the precautionary principle
 - b) the polluter pays principle
 - c) best available techniques (BAT) and best environmental practice (BEP), including clean technology
- 2) provides for the Commission established by the OSPAR Convention to adopt binding decisions
- 3) provides for the participation of observers, including non-governmental organizations, in the work of the Commission
- 4) establishes rights of access to information about the maritime area of the Convention

OSPAR requires the following:

- The topsides of all installations must be removed to shore
- All sub-structures or jackets weighing less than 10,000 t must be completely removed and brought to shore for reuse, recycling or disposal on land
- However, it is recognized that there may be difficulty in removing footings of large steel sub-structures weighing over 10,000 t and in removing concrete gravity based installations. An assessment will be made on a case by case basis as to whether exceptions from the general rule can be made for such installation.
- Exceptions can be considered for other structures when exceptional and unforeseen circumstances resulting from structural damage or deterioration or other reasons which would prevent the removal of a structure

11-4 Decommissioning Options

The most important steps in the decommissioning process are the planning ahead and the selection of the best decommissioning option. The decommissioning process can take several years from initial planning to removal and disposal onshore.

When faced with the prospect of a platform nearing the end of its useful life, all operating companies begin to think about all the possible options for decommissioning the facilities. Scientific studies are then carried out to assess each possible option using the following criteria:

- Environment (land, sea and air)
- Technical feasibility
- Cost
- Health and Safety
- Public opinion

The best decommissioning option is usually a balance of all 3 factors.

11-4-1 Possible Decommissioning Options

The topsides of all installations must be removed to shore, without exception.

For structures considered 'small' (i.e. those with substructures weighing less than 10,000 t) complete removal is the only permitted option. The best option is then down to evaluating the various methods for carrying out the removal, balancing the same set of criteria.

For structures that are brought back to shore (either as a whole or in pieces), different disposal options must then be evaluated. The waste hierarchy dictates that there is a preference for reuse (either within or outside the oil and gas industry), followed by recycling and finally disposal, if neither of the other two options are possible. For the large structures (i.e. all steel or concrete installations with substructures weighing more than 10,000 t) a number of options are possible and must be evaluated balancing all the above listed criteria:

- Complete removal
- Partial removal leaving 55 m clear water column for navigational safety
- For steel structures the cutoff point would be at the top of the 'footings'
- For concrete gravity structures the cutoff point is usually determined by the construction of the installation
- Leave in place (for concrete gravity based installations only).
- Disposal at deep sea site following removal from original site (for concrete gravity based installations only).

11-4-2 Criteria for Decommissioning Solution

When considering the environmental impacts of a given option, it is necessary to assess the wider effects on the land, sea and air of bringing all or parts of the structure to shore. A number of factors may be evaluated:

- The amount of energy used to remove a structure and take it back to shore
- The emissions to the atmosphere during all the phases of the decommissioning
- Waste streams from all phases of the decommissioning of a structure, which must be traced and accounted for
- The environmental effects on other users of the sea and the local populations onshore
- The environmental effects on the marine fauna and flora

All the different available technologies are researched for each phase of the decommissioning operation and the best technology used to ensure efficient and safe procedures. New offshore technologies are continually being evaluated, tested and developed.

To date most decommissioning has relied on heavy lift vessels which take the structure apart offshore piece by piece. However, new technologies, which could lift whole topsides off in one go and possibly the whole of the substructures, are being jointly developed by marine contractors and the oil and gas industry.

As with all businesses, the onus is on the operator to find the most cost-effective option which does not compromise the safety of workers or the environment. At present the costs for decommissioning structures are relatively high since experience is still limited to a small number of shallow water structures.

The health and safety of the workers is of paramount importance, and every effort is made to ensure that all phases are carried out to the highest industry safety standards. The work offshore is inherently more dangerous as it is the least predictable due to the weather, the sea movement and the equipment being used.

11-5 Reuse

Although newer techniques have furnished alternative ways to reduce decommissioning expenditures, the costs for decommissioning services and equipment are currently increasing. In addition, the cost for fabricating new structures is also increasing, one current trend for offsetting costs is to reuse a portion or all of the offshore facility, many operators are considering this option in other locations, such as West Africa and Southeast Asia.

11-6 Explosive Activities

Complete or partial removal of steel or concrete fixed platforms that weigh thousands of tons is practically impossible without using explosive materials. Bulk explosive charges have been used in 90% of the cases. This causes very powerful, although short-term, impact on the marine environment and biota, which should not be neglected.

It is extremely difficult to get any reliable estimates of possible mortality of marine organisms, especially fish, during an explosive activity even if the initial data, such as the type of explosive, depth of the water, bottom relief, and others, are known. This large uncertainty is connected, in particular, with the high heterogeneity of fish distribution that strongly depends on specific features of fish schooling behavior.

Calculations show that with a 2.5 t (TNT equivalent) charge, the mass of killed fish will be about 20 t during each explosion.



11-7 Decommissioning of Offshore Installations in Europe

More than 7,000 offshore oil and gas installations are in place worldwide, many of which will be decommissioned in the coming years and decades. Furthermore, several thousand kilometers of pipelines will probably need to be removed, trenched or covered.

This will present Europe with both a major challenge from an environmental and technological perspective and a potential opportunity from an industrial and economical perspective. Over the next 10-20 years in European seas, averages of 15-25 installations are expected to be abandoned annually. This represents among other materials 150,000-200,000 t of steel per year. The continental shelf bordering the states of the European Community and Norway has more than 600 offshore oil and gas platforms, more than 430 subsea structures and more than 600 subsea wellheads.

In 1998 in Sintra, Portugal, the members of the OSPAR Commission for the Protection of the Marine Environment of the North East Atlantic and the European Commission agreed on OSPAR decision 98/3 on the Disposal of Disused Offshore Installations, which went into force on 9 February 1999.

Reuse, recycling or final disposal on land is the preferred option for the decommissioning of offshore installations in the maritime area. Therefore the ministers agreed that dumping and abandonment of disused offshore installations within the maritime area is prohibited. However, alternative disposal, involving leaving all or part of the installation in place, may be acceptable and the competent authority of the relevant OSPAR member country may issue a permit for alternative disposal under certain conditions.

To obtain a permit for alternative disposal, an Environmental Impact Assessment must be performed that satisfies the competent authority of the relevant OSPAR member country and that shows that there are significant reasons why an alternative disposal is preferable to reuse, recycling, or final disposal on land. Consultation with other OSPAR members is also a requirement.

The information collated in the assessment must be sufficiently comprehensive to enable a reasoned judgment on the practicability of each of the disposal options, and to allow for an authoritative comparative evaluation. The assessment of the disposal options shall take into account:

- Technical and engineering aspects of the option, including reuse and recycling and the impacts associated with cleaning, or removing chemicals from the installation while it is offshore.

- Safety considerations associated with removal and disposal, taking into account methods for assessing health and safety at work.
- Impacts on the marine environment, including exposure of biota to contaminants associated with the installation, other biological impacts arising from physical effects, conflicts with the conservation of species, protection of their habitats, mariculture, and interference with other legitimate uses of the sea.
- Impacts on other environmental compartments, including emissions to the atmosphere, leaching to groundwater, discharges to surface fresh water and effects on the soil.
- Impacts on amenities, the activities of communities and on future uses of the environment.
- Economic aspects.

11-7-1 Information Exchange

Decommissioning of offshore installations will provide a major challenge for public authorities and oil and gas operators from an environmental and technological perspective. In the case of alternative disposal being an option it will be a major challenge for authorities and oil and gas operators to defend their decision to the general public and environmental protections. At the same time it also provides a challenging opportunity for industries such as engineers, contractors, recycling companies, oil and gas companies, and environmental managers, to seek sustainable and economically feasible solutions and to apply new technologies for safeguarding the vulnerable marine environment. Decommissioning therefore provides new business opportunities for suppliers to the oil and gas industry.

To support these challenges from all perspectives and for all interested parties from the oil and gas industry, public authorities, regulatory bodies, contractors, and the general public, there is a great need for exchange of data and information covering the full matrix of relevant subjects. These include:

- Details of offshore installations
- Suppliers of specialist services and products
- Marine environmental measurements and analyses
- Technologies for decommissioning
- Environmental regulations and regulatory frameworks
- Planned and executed decommissioning projects

11-7-2 Challenges of Offshore Installations in Europe

11-7-2-1 Technical Challenges

The technical challenges faced in decommissioning an offshore oil

and gas facility are equal to, and in some respects, more complex than those overcome in the initial construction and installation phase. Whereas the industry has considerable worldwide experience in removing steel structures, particular challenges are presented by some of the larger deep water structures of the North Sea.

11-7-2-2 Health and Safety Challenges

Decommissioning and removal of a complex offshore oil and gas facility is a complex and potentially risky operation. Any proposed decommissioning operation must seek to minimize the associated hazards and risks to personnel to a level that is as low as reasonably practicable. Such operations will be subject to detailed safety analysis and summarized in the abandonment safety case approved by the appropriate regulatory authorities.

11-7-2-3 Environmental Challenges

When undertaking and planning decommissioning, account has to be taken of the environmental impact of each phase of the operation.

Results of the various options available will be compared to identify the option of least detriment to the environment.

11-7-2-4 Economic Challenges

There are many economic decisions involved in planning a decommissioning operation. From defining the optimum time to shut down a producing facility and ensuring adequate financial security is in place to meet decommissioning liabilities, through to selecting the decommissioning option of least cost, which is compatible with technical feasibility, least risk to personnel and least impact on the environment.

11-7-2-5 Construction Challenges

The process of decommissioning offshore oil and gas facilities raises many complex issues and choices. Because of these complexities and their inter-relation, it is essential that there is fully transparent and well informed debate between owners, government and all interested parties in society to define consensus solutions. Decommissioning strategies are not developed in an ad hoc fashion. The oil and gas industry is highly regulated through each phase of its development from exploration, building and installing processing facilities, operations and decommissioning. The freedom of National States to define their own abandonment regulatory regimes is constrained by a global framework of conventions, guidelines, and regional protocols, which together define international law.

National governments will have specific laws governing decommissioning operations which undoubtedly will seek protection from litigation by enforcing consistency between national and international laws.

11-8 Decommissioning of Offshore Installations in the North Sea

Many of the oil and gas installations in the northern North Sea are reaching the end of their economic production life, and proposals for decommissioning are being prepared by the operators. In 1995, proposals by Shell to dispose of the Brent Spar oil storage facility provoked an extensive campaign of protest. The result was a change of plan, with the facility being towed inshore to be dismantled. The material has been recycled for harbor construction at Mekjarvik, near Stavanger, Norway.

On 22 October 1999, Phillips Petroleum Norway announced their plans to decommission 15 installations in the Ekofisk field, an operation on a much bigger scale than the Brent Spar. If these proposals are accepted by the Norwegian government (full parliamentary approval was given October 2002), and The Oslo and Paris Commissions (OSPAR), 14 steel structures will be returned onshore for recycling and a large concrete storage tank will be left in situ. Perhaps most controversially, Phillips plan to leave the drill cuttings piles in situ. Drill cuttings consist of the fragments of rock that are removed as each oil or gas well is drilled, mixed with so called "drilling muds", which are used to lubricate the drill bit, carry rock fragments back to the surface and maintain pressure in the well as it is drilled. The drill cuttings are usually discharged into the sea adjacent to the platforms and although some of the drilling muds are recovered and reused, some adhere to the cuttings and are also discharged.

11-9 Decommissioning of Offshore Installations in Denmark goes commercial in the Harbor of Esbjerg - over time

The Danish offshore industry aims to be a market leader within environmentally sustainable decommissioning and recycling of obsolete offshore platforms from the North Sea.

For over 10 years a group of companies, consultants, educational institutions and politicians in Denmark has made sincere efforts to enable Port of Esbjerg to take part in the interesting decommissioning market.

Focus areas in the decommissioning consortium project has been:

- Economy – cheapest and the best technical solution
- Health
- Safety
- Environment
- Quality

Interesting lessons have been learned through the decommissioning consortium project:

- Inverse installation techniques using crane and barge is best removal technique
- Decommissioning of offshore constructions are high-technology projects and includes an large amount engineering hours on:
 - Planning and designing on the technique
 - Planning and designing on the environmental and health matters
 - Control and inspection on technique and environmental and health matters

- The now finished work on Environmental Impact Assessment (EIA/in Danish VVM) are an important and invaluable step on decommissioning in Port of Esbjerg
- Man hours on manual work in decommissioning are less than expected
- Abandoning an offshore construction is a costly as when it was established. The costs in abandoning offshore constructions can be split in the following phases:
 - Engineering, planning, control are estimated to 30% of expenses
 - Cleaning, release, crane lift and transport are estimated to 60% of expenses
 - Shredding and cuttings are estimated to 10% of expenses
 - Reuse of high quality steel and large components generates income
 - BEOND this comes a very costly sealing of the wells
- There are about 5 to 10 m³ of oil and chemicals on the scraps brought in land, because most of this is recaptured during the work offshore. It is mainly diesel, lubricates and hydraulic oils together with different chemicals used in the processing of oil and gas
- The weight of a typical jacket is between 1.000 and 5.000 tons and topsides weight is typically up to 15.000 tons divided in modules of 500 to 1000 tons for transporting
- Subcontracting on large foreign decommissioning project is an interesting option
- Removal of steel and large constructions in the operation phase of offshore production is an interesting option

Esbjerg advantages

- Suitable locations and infrastructure
- Capable and skilled companies and people
- Knowledge and experience

Chapter 12

Health, Safety, Environment, and Quality (HSEQ)

12-1 Overview

HSEQ (Health, Safety, Environment and Quality) is an important concept within the offshore industry. Virtually all companies involved in the offshore business have an HSEQ policy. There are several reasons for the big focus on HSEQ:

The main aims are to protect the health, safety and welfare of people at work, and to safeguard others, e.g. surroundings and supply, who may be exposed to risks from the way work is carried out.

Focus on HSEQ is to decide what is reasonably practicable within safety and environment. Management must take account of the degree of risk on the one hand, and on the other the sacrifice, whether in money, time or trouble, involved in the measures necessary to avert the risk. Unless it can be shown that there is gross disproportion between these factors and that the risk is insignificant in relation to the cost, the Management must take measures and incur costs to reduce the risk.

The economy in the overall picture will be reduced.
Less accidents = less expenditure.

Some companies refer to the concept by other names such as QHSE, Due Care or Safety Awareness. Sometimes HSEQ is treated as 2 main areas and some companies thus operate with HSE as one concept and Quality as another.

The attention to HSEQ can be attributed to some tragic accidents in the offshore industry such as the 1988 Piper Alpha disaster in the Scottish part of the North Sea where a gas explosion resulted in the death of 167 people as well as the total destruction of the platform.

An inquiry later revealed that the accident was caused by a series of human errors due to lack of safety procedures. Today, HSEQ procedures ensure that a similar event will not take place.



Figure 12.1 – The Piper Alpha Platform.

12-2 Hazards and Goals

In Denmark, there are nearly 50 offshore installations, all placed offshore in the North Sea. The Danish offshore industry employs approximately 10,000 people in a range of activities, of which 5,600 are employed at Esbjerg. The oil platforms employ 2,500 people.

Although there have been improvements in health and safety offshore since the Piper Alpha disaster in 1988 the risks are ever present:

- Fire
- Explosion
- Release of gas
- Structural failure
- Environment disasters

All have the potential to cause major loss of life. Specific legislation exists to deal with the hazards arising from the operation of fixed/mobile installations, wells and pipelines. This is supported by relevant legislation linked to generic industrial hazards.

This is a dynamic rapidly changing industry but with an ageing infrastructure and increasing cost pressures as the available oil and gas declines. These issues, together with the geographically isolated workforce, and the inherent hazards in working offshore require high standards of management of health and safety.

Within HSEQ the goals for the upstream oil and gas industry are:

- To prevent major accidents with catastrophic consequences
- To prevent fatalities and accidents
- To secure a step change improvement in injury rates and work related health and consequent days lost from work
- To support industry's goal to be the world's safest offshore sector by 2010
- To secure more effective workplace involvement
- To maintain an effective regulatory framework

Health, Safety, Environment, and Quality (HSEQ)

12-3 Procedures

The backbone of HSEQ procedures are standards (also referred to as norms). The main standardisation organisations within the offshore industry are:

- ISO - International Standardization Organization
- CEN – Comité Européen de Normalisation
- API - American Petroleum Institute

For the North Sea it is also worth to mention Dansk Standard (Danish Standard) and NORSOK Petroleum.

These organisations all develop and adopt standards that are used throughout the offshore industry.

Important standards within HSEQ include:

- DS/OHSAS 18000 series (Health & Safety)
- DS/EN ISO 14000 series (Environment)
- DS/EN ISO 9000 series (Quality)

For the 9000 series a special version for the oil and gas industry has been developed – ISO 29001.

Besides from using international standards, companies often develop their own standards. For example, operators often have standards that their contractors must obey to when working for the contractor.

In addition, HSEQ procedures are often supplemented by a management system. This can be illustrated as shown below:

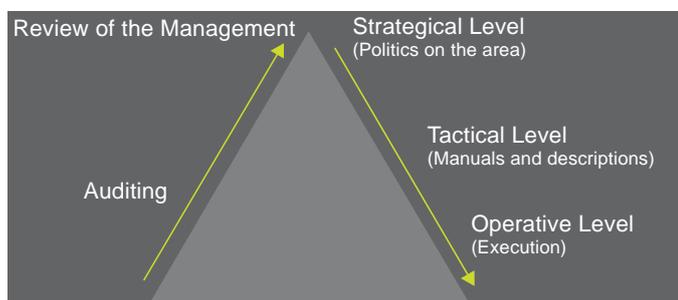


Figure 12.2 – HSEQ management system.

Following a management system allows for a dynamic system that is adaptable to actual conditions.

Another way of illustrating the process, by which HSEQ is handled, is by the so-called Demming Wheel:

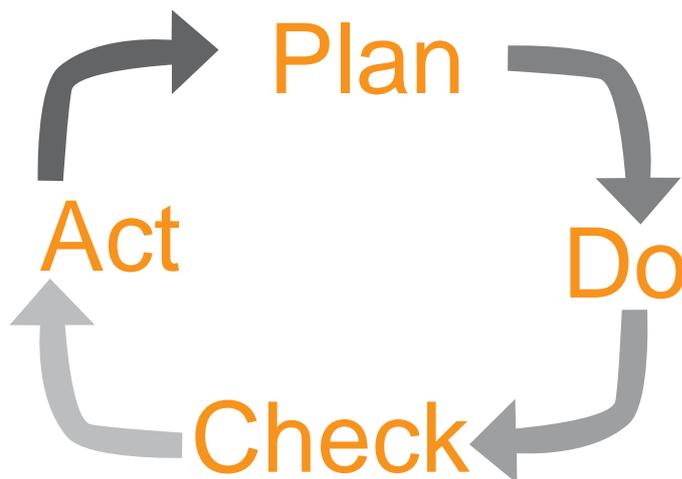


Figure 12.3 – Demming Wheel.

12-4 Mindsets

Having standards and procedures is not enough to ensure a safe work environment. Another important part of HSEQ is the mindset of the people involved in the daily work. To benefit from the procedures it is essential that employees display safe behavior. Offshore oil and gas companies therefore put a lot of effort into changing the attitude of their employees towards HSEQ so that their employees not only know what is prescribed in the procedures but also act on it. The effort is done in different ways. Some companies use specialists within coaching and teaching in safety and awareness, other companies use web based courses.

Common for both ways of teaching is that the courses try to improve/alter the mindset of the workers regarding safe behavior.

Another way of changing the mindset of workers is by using posters, stop cards, safe job analyses and toolbox talks etc.

All in all - in other words - if the mindset, in the whole organization, regarding safety is changed, money and lives can be saved.

12-5 Risk analysis

The operators are responsible for continuously improving the health and safety of their personnel as well as the safety of installations and the environment. For this purpose, the operators carry out risk analyses in observance of the ALARP principle; see figure 12-4.

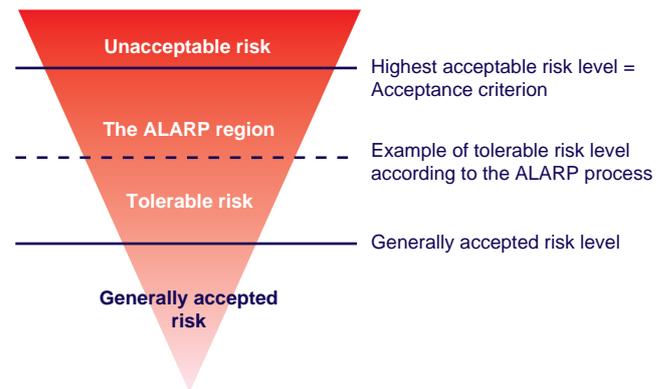


Figure 12-4 Risk levels of the ALARP principle (Energistyrelsen)

Previously, risk analysis was a tool used to establish that statutory requirements and limit values were observed. Now the operating company must continuously perform risk assessments and attempt to reduce risks whenever reasonably practicable. The aim is to ensure the implementation of improvements on a more contemporary basis.

Health, Safety, Environment, and Quality (HSEQ)

12.4 Danish Maritime authority (DEA)

The Danish Maritime authority registers and processes all reported work-related accidents on Danish offshore installations and evaluates the follow-up procedures taken by the companies.

At the DEA's first inspection after an accident, the work-related accident is addressed at a meeting with the safety organization on the installation. In case of serious accidents, the DEA carries out immediate inspections in cooperation with the police.

The aim of the DEA's follow-up on work-related accidents is to ensure that the companies and their safety organizations take concerted action to reinforce preventive measures on offshore installations.

In 2008, the DEA registered a total of 20 reports concerning work-related accidents, 18 on fixed offshore installations, including mobile accommodation units, and 2 on other mobile offshore units. The accidents are broken down by category in table 12.1 and figure 12.5. In 2009, the DEA registered a total of 24 reports concerning work-related accidents, 20 on fixed offshore installations, including mobile accommodation units, and 4 on other mobile offshore units. The accidents are broken down by category in table 12.1 and figure 12.5.

Cause of accident	Fixed	Mobile
Falling/tripping	6	1
Use of work equipment	5	2
Handling goods	6	1
Other	3	0
Total	20	4

Table 12.1 Reported accidents broken down by cause of accident for 2009

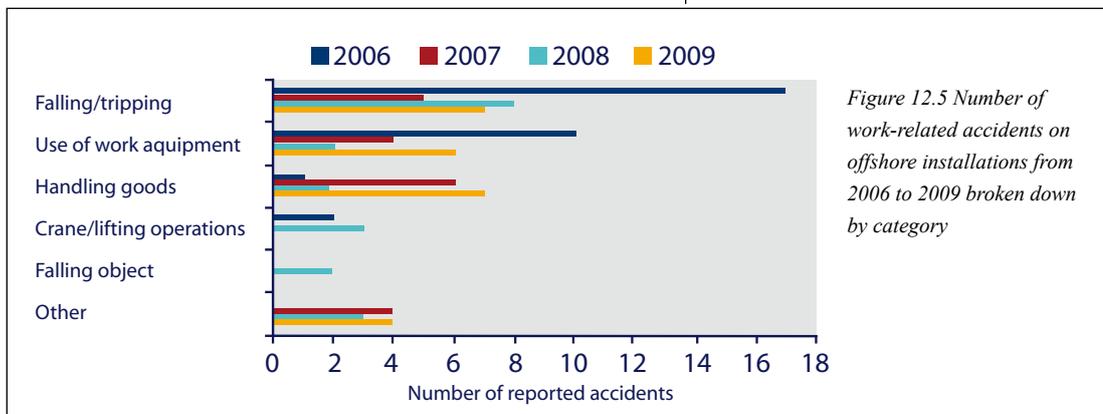


Figure 12.5 Number of work-related accidents on offshore installations from 2006 to 2009 broken down by category

Chapter 13

Offshore Wind Energy

13-1 Background

For thousands of years humans have exploited the energy of the wind. First as a mean of power for sailing ships, later for pumping water and grinding grain and more recently for the generation of electricity. But it was not until the oil crisis in the 1970's that wind technology gained a real foothold. The recent years' focus on peaking oil reserves has fuelled the desire of countries in the Western World to become more independent of oil-based electricity, and sparked a great interest in wind energy. Today wind power is the fastest growing energy source in the world. Originally, wind turbines were placed all over the countryside in windy locations such as hilltops and near the coast, but in the early 1990's a new type of location was taken into use - the ocean.



13-2 What is Wind Energy?

Due to the curvature of the earth, solar radiation entering the earth's atmosphere warms certain areas of the globe more so than others, most at the equator, least at the poles. Wind is created by air flowing from warmer to cooler regions, and it is these air flows that are harnessed by windmills and wind turbines to produce power. An estimated 1% -3% of the sun's energy that reaches the earth is converted into wind energy. This is about 50 to 100 times more energy than is converted into biomass through photosynthesis by all the plants of the earth. Most of this wind energy is generated at high altitudes, where continuous wind speeds of over 160 km/h occur.

Eventually, wind energy is converted through friction into diffuse heat throughout the earth's surface and atmosphere.

Today, wind power largely generates electricity by converting the rotation of turbine blades into electrical current by means of an electrical generator. In windmills (a much older technology) wind energy is used to power mechanical machinery to do physical work, like crushing grain or pumping water.

Wind power is used in large-scale wind farms to supply national electrical grids as well as in small individual turbines for providing electricity to rural residences or grid-isolated locations.

Wind energy is ample, renewable, widely distributed and clean, and mitigates the greenhouse effect if used to replace fossil-fuel-derived electricity.

13-3 The Wind Turbine

A modern wind turbine is a complex construction consisting of more than 10,000 different parts. The main part is the nacelle, where all the electronic and mechanical equipment is situated.

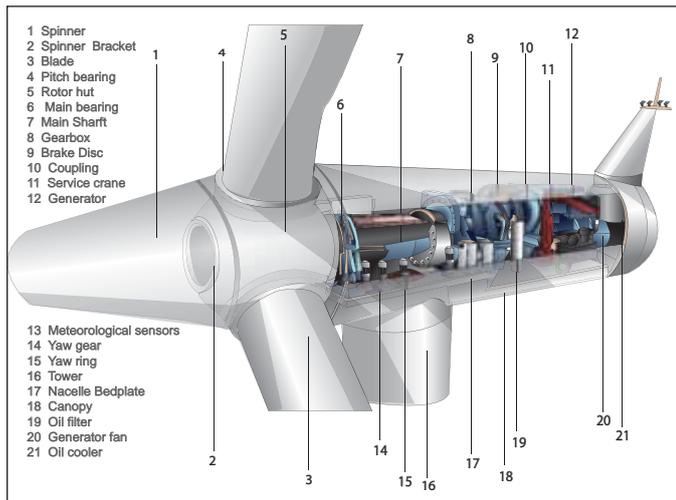


Figure 13.1 – The Nacelle.

The blades are located at the front of the nacelle. Most modern wind turbines have 3 blades. The nacelle and blades are located at the top of the tower that is supported by a foundation.

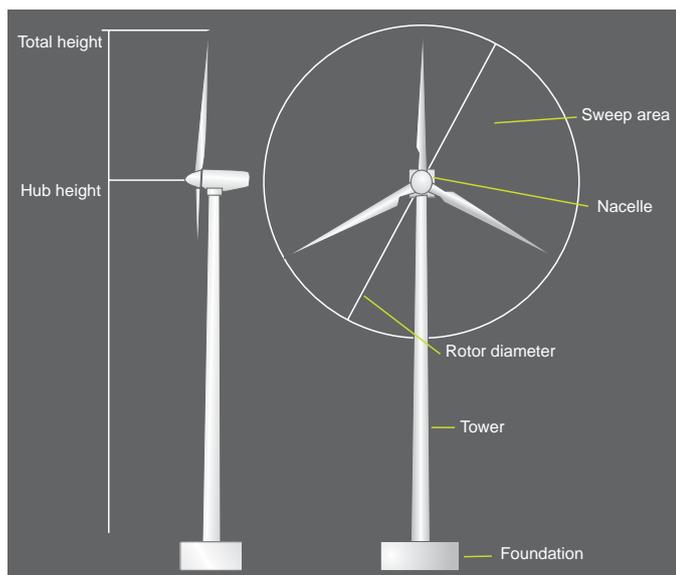


Figure 13.2 – The Wind Turbine.

Each turbine model has a specific power curve. The power curve is a graph, which reveals key data about the power and wind speed for the given turbine. See example in the following figure:

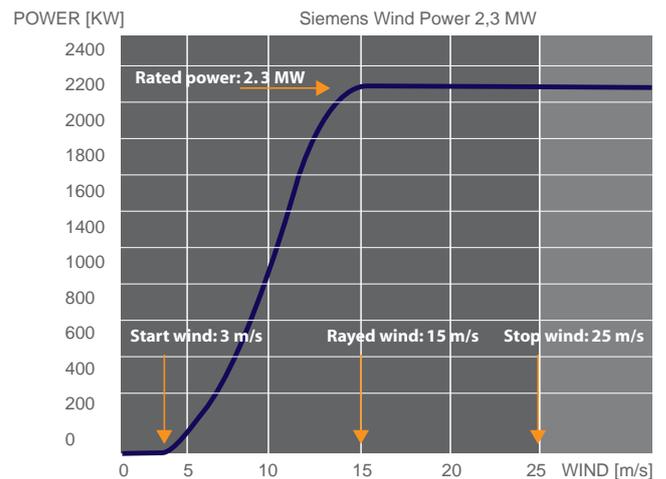


Figure 13.3 – Power curve for 2.3 MW turbine from Siemens Wind Power.

From the power curve above the following conclusions can be drawn:

- The wind turbine starts producing electricity when wind speed reaches 3 m/s
- Production increases as wind speed increases
- The maximum power produced is 2.3 MW – this occurs when wind speed reaches 15 m/s
- When wind speed exceeds 25 m/s, production stops. As a security measure the turbine shuts down at this speed.

13-3-1 Offshore Foundations

When building wind turbines on land, the tower is usually grouted in place. This is a fairly straight-forward and cheap process. Offshore, however, the story is very different. Here the foundation normally accounts for around 25% of the total cost of the wind farm. Special vessels and equipment are also needed for installation, which calls for very different requirements when compared to onshore wind farms.

Until present (1991-2010) almost all offshore wind turbines have been located in shallow water (max. 25 m). 2 types of foundations are suitable at these depths – the monopole and the gravity foundation:

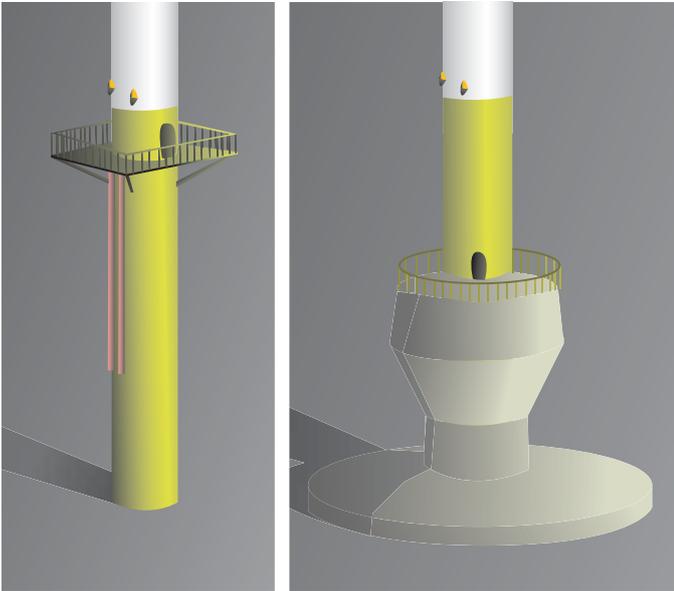


Figure 13.4 – Monopile foundation.

Figure 13.5 – Gravity foundation.

A monopile is in essence a long steel rod that is hammered into the seabed. Offshore wind farms such as Horns Rev and Samsø have monopile foundations.

A gravity foundation can be made of either concrete or steel, concrete being the most common. The idea is to have a base structure heavy enough to support the tower and nacelle solely by its own weight. The technique is similar to that used in bridge construction and is therefore very well known. Gravity foundations are transported to the site on barges and lowered onto the seabed. The foundation often contains compartments, filled with ballast rocks to increase the total

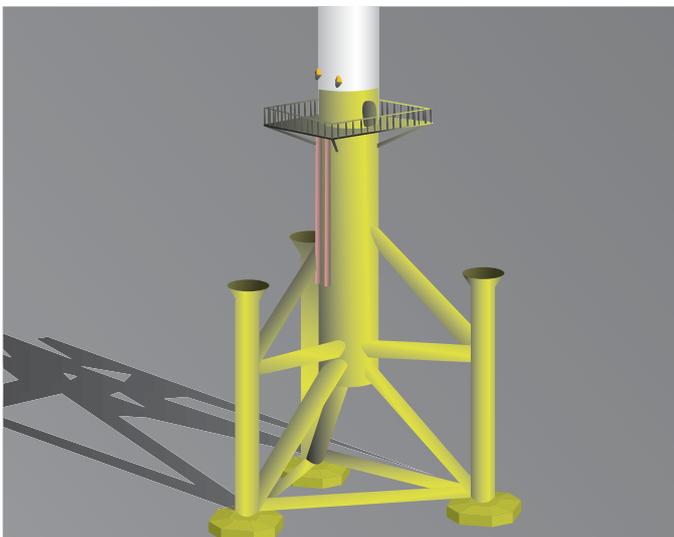


Figure 13.6 – Tripod foundation.

weight, which is typically a couple of thousand tons. Nysted (aka Rødsand) and Middelgrunden are examples of wind farms that have gravity foundations. In future many offshore wind farms will be located in deeper water. Alternative foundations will therefore have to be developed for this situation. One example of foundation could be the tripod structure. This is already used in oil and gas installations, so the technique has already proven itself.

Another option could be floating foundations – a technology currently being developed by Danish and Norwegian companies. This would be suitable for very deep water (over 100 m).



Figure 13.7 – Floating foundation.

13-4 The Offshore Wind Market

Advantages in placing wind turbines offshore as opposed to onshore are several. These include more wind, more space and fewer concerned parties (e.g. no neighbours). Advantages such as these inspired the Danes to establish the first offshore wind farm of the world at Vindeby (11 turbines, 5 MW). It was built in 1991 in southern Denmark (off the coast of Lolland). Vindeby proved to be a success - analysis showing that production of electricity was 20% higher than it would have been for a similar wind farm at a typical onshore location (Vindeby produces on average 11.2 GWh/year).

Furthermore environmental analyses have shown that the wind farm have had no considerable negative impact on marine life. Since the construction of Vindeby other offshore wind farms have been established in Denmark as well as abroad. So far 2 GW has been installed offshore.

Currently (2010) offshore wind farms are concentrated in North Western Europe, primarily Denmark, the United Kingdom, the Netherlands, Sweden and Germany

Danish energy policy is planning a major expansion of offshore wind farms. The aim is that by 2030, 75% of the Danish wind energy (a ratio equivalent to 4000 MW) will be delivered from offshore wind farms. If this goal is met, it will result in wind energy being able to cover half of Denmark's total energy requirements.



Future prospects within offshore wind farms are extensive. Installations with a capacity of several thousands of MW have been planned – most of them located in North Western Europe. Some of the largest expansions planned are located in the United Kingdom and in Germany. Prospects for the near future seem to indicate that the market is picking up pace in North Western Europe.

Besides the offshore wind farms scheduled in North Western Europe, a number of other countries are planning to include offshore wind energy in their grids. These include USA, Canada, China, India, Korea and Japan.

All in all, offshore wind energy is a market with a great potential, with much of the technology concentrated around Northern Europe and around Denmark in particular. Until now, 90% of all installed offshore capacity in the world has been delivered from the Danish wind power industry.

To keep track of future development, Offshore Center Danmark has created a website providing information on all existing and planned offshore wind farms. The website can be found at <http://www.offshorecenter.dk/offshorewindfarms>.

In addition to basic sites, the location of the wind farms has been plotted into Google Earth. By downloading the OWF place mark collection (also found at <http://www.offshorecenter.dk/offshorewindfarms>), the location of all existing and planned offshore wind farms can be viewed using the Google Earth application.

Name	Status	Capacity (MW)	Completion Year/Website
Belgium			
Bank, wind, 1000	Completed	100	2017
Bank, 1000	Completed	100	2017
Thames, Bank, 1	In Operation	10	2008, www
Thames, Bank, 2	Completed	10	2010
Canada			
10, 100	Feasibility study, Planning and engineering work	100	2010

Chapter 14

Wave and Tidal Energy

14-1 Overview

Many studies suggest that the marine environment stores enough energy in the form of heat, currents, waves and tides to meet the total worldwide demand for power many times.

Potential energy is energy waiting to be used. The gravitational forces of the sun, earth and moon together create a tremendous store of this energy in the waters of the ocean. Tides moving backwards and forwards along our coastlines and the constant movement of waves could provide enormous amounts of electrical power, and the construction of stations with turbine generators could transform much of this potential energy into electricity. There is plenty of energy in ocean waves, but of rather low quality.

Therefore it is a challenge to find ways to concentrate and convert the potential energy into more useful forms of energy, such as electricity. One of the challenges in producing electricity from waves is that - in spite of strong forces in action where waves are hitting - the movements in the wave crests are rather slow. Bigger wave heights also give longer wavelengths and periods of time between the energy bursts. Approximately with a factor of 20, but it is not quite linear. It means that the power in watt is rather low and not much to go for, unless you build a plant covering a big area and try to accelerate the movements by some sort of gearing or temporary storing. Also, it is necessary to find ways to smoothen out the irregularity of natural waves, and collect as much as possible to run a turbine and a generator.

14-2 Wave Energy

Wave energy conversion takes advantage of the ocean waves, which are caused primarily by the interaction of the wind with the surface of the sea. Wave energy is an irregular, oscillating low-frequency energy source that must be converted to a 60-Hertz frequency before it can be added to the electric utility grid. It must be noted that the magnitude of wave power at deep ocean sites is 3 to 8 times the wave power experienced adjacent to coastal sites. However, the cost of electricity transmission from deep ocean sites is prohibitively high. Although many devices have been invented to exploit this energy, only a small number has been tested and evaluated, and of these only a few have been tested at sea rather than in artificial wave tanks. Some systems extract energy from surface waves, others from pressure fluctuations below the surface or from the full wave. Some systems are fixed in position and let waves pass through them, while some follow the waves and move with them, and yet other systems concentrate and focus waves, which increases their height and their potential for conversion into electricity.

Wave energy converters can be placed in the sea at various locations. Some are floating structures while others are placed on the seabed in relatively shallow water. Those situated on the bottom of the sea can be completely submerged or project above the surface. Finally a converter system can also be placed on an offshore platform. Apart from wave-powered navigation buoys, however, most of the prototypes have been placed on or near the shore. The visual impact of a wave energy conversion facility depends on the type of device as well as its distance from the shore. In general floating buoy systems or offshore platforms placed many kilometers from land are not likely to have much visual impact (nor will a submerged system). On the other hand onshore facilities and offshore platforms in shallow waters can give an industrial look to a site of natural recreation area or beauty.



Wave and Tidal Energy

14-3 Wave Power

Waves are generated by wind passing over the sea: organized waves form from disorganized turbulence because wind pressure pushes down wave troughs and lifts up wave crests. In general, large waves are more powerful. Specifically, wave power is determined by wave height, wave speed, wavelength, and water density.

Wave size is determined by wind speed and fetch (the distance over which the wind excites the waves) and by the depth and topography of the seafloor (which can focus or disperse the energy of the waves). Wave motion is highest at the surface and diminishes exponentially with depth; however, wave energy is also present as pressure waves in deeper water.

The potential energy of a set of waves is proportional to wave height squared times wave period (the time between wave crests). Longer period waves have relatively longer wavelengths and move faster. The potential energy is equal to the kinetic energy (that can be expended). Wave power is expressed in kilowatts per m (at a location such as a shoreline).

The formula below shows, how wave power can be calculated. Excluding waves created by major storms, the largest waves are about 15 m high and have a period of about 15 s. According to the formula, such waves carry about 1700 kW of potential power across each meter of wavefront. A good wave power location will have an average flux much less than this: perhaps about 50 kW/m.

Formula: Power (in kW/m) = $k H^2 T \sim 0.5 H^2 T$,

where k = constant, H = wave height (crest to trough) in meters, and T = wave period (crest to crest) in seconds.

14-4 Tidal Energy

Tidal energy is used to produce electricity by harnessing the energy contained in the mass of moving water associated with tides. There are 2 types of energy associated with this: kinetic energy from currents created by the ebb and flow of tides and potential energy from the difference in height (or head) between high and low tides. Generating energy from tidal currents is considered much more feasible today than building ocean-based dams or barrages, and many coastal sites worldwide are being examined for their suitability to produce tidal (current) energy.

One method of exploiting tidal energy involves building a dam and creating a tidal lagoon. The barrage traps water inside a basin. Heat is created when the water level outside of the basin or lagoon changes relative to the water level inside and this is used to drive the turbines. In any design this leads to a decrease in tidal range inside the basin or lagoon, implying a reduced transfer of water between the basin and the sea. This reduced transfer of water accounts for the energy produced by the scheme.

Tidal power is classified as a renewable energy source, because it is caused by the orbital forces of the solar system and is considered inexhaustible within a human timeframe. The root source of the energy comes from the slow deceleration of the earth's rotation. The moon gains energy from this interaction and slowly recedes from the earth. Tidal power has great potential for the generation of electricity in the future because of the total amount of energy contained in this rotation. Tidal power is reliable and predictable (unlike wind energy and solar power).

14-5 Implications

Though intermittent, electrical output from wave energy is more reliable than from wind energy, as sea states (waves) are inherently more predictable than wind. This is because, once created, they continue to transmit energy for a foreseeable period. Typically waves can be accurately predicted over a period of approximately 8 hours.

Because of limited experience with renewable ocean energy, it is difficult to be certain how effective and economic it would be if fully developed. Tidal barrages have been tested (albeit limited), but their failure to take off speaks for itself. A rough indication of the relative capacities is the load factor, which is defined as the number of hours a year during which the facility operates at nominal capacity divided by the total operating hours in a year – 8760 hr/yr.

Figure 14.1 - World map showing the energy content at different locations. Numbers indicate kW / m of crest length.



14-6 Danish Position in Wave Energy

Harvesting energy from offshore is a Danish speciality. Since the first Danish production of oil, and also the first Northern Sea, was initiated in 1971 (the Dan field), and the first offshore wind farm in the world was constructed (Vindeby) in 1991, Denmark has proved itself a key player in the global offshore market. Currently, a new segment to the offshore energy sector is on the rise with Denmark taking the lead – wave energy.

The potential for wave energy is vast. Studies have shown that the global energy demand can be covered from extraction of 0.1% of the total energy available in the Earth's oceans. As seen, North Western Europe has quite a high energy content.

Over the years several ideas for devices to extraction of wave energy have been designed. Countries like Japan, the United Kingdom and Norway have been conducting research in wave energy since the 70's. In Denmark a state supported research programme was carried out from 1997-2002. This spawned about 50 ideas for new devices, making Denmark the most active region within development of wave energy.

Wave and Tidal Energy

14-7 Pilot Plants in Europe

So far only a few instances of commercial devices have been installed around the world. These include the Pelamis device off the coast of Portugal and Oscillating Water Column devices in Scotland, India and at the Azores. However, several promising new devices are aiming for commercialisation within near future. These include Danish devices Wave Star, Poseidons Organ and Wave Dragon.

Method	Pilot plant	Country
Pneumatic wave energy conversion systems	Limpet	Scotland
	Azores	Portugal
	Oe Buoy	Ireland
Mechanical wave energy conversion systems	AWS	Portugal
	Pelamis	Scotland
	Lab-Buoy	Greece
Overtopping/surging wave energy conversion systems	Wave Dragon	Denmark
	Wave Plane	Denmark
	Seapowerkraft	Sweden/UK
	Wave Star	Denmark
Tidal current devices	Seaflow	Sweden
	Messina	Italy
	Stingray	UK

Table 14.1 - Pilot plants in Europe and their corresponding methods.

Float based devices (pneumatic wave energy conversion systems and mechanical wave energy conversion systems) work by the absorber principle, where floats help extracting the energy. Overtopping devices work by the overtopping principle, where water is lead to a plateau above the natural sea level from where it will be lead through turbines. Oscillating water column devices contain a chamber where the water level changes goes in and out. When the water level changes so does the pressure. This causes air to flow through the turbine generating electricity.

14-8 Scope for Danish Wave Energy in the North Sea

The energy from waves passing the Danish sea territory is estimated at approximately 30 TWh per year. The calculation goes as follows:

If an area in the North Sea from the south sea border of the Danish territory close to the oil field Dan to the Norwegian border in the north (covering 150 km) is to be covered with wave energy devices all with an efficiency of 25%, then the yearly net energy production will amount to 5 TWh which is approximately 15% of the total electricity consumption in Denmark.

Research has shown that Danish waves on average have a wave period 4-5 sec. occurring 2668 hours per year (30%). Wave heights average between 0.5 and 1.5 m occurring 4105 hours per year (46%).

Thus, there are plenty of possibilities for utilisation of the power in waves off the Danish coast, specifically in the Danish North Sea sector.

14-9 Danish Concepts

A number of Danish inventors have created devices to convert the power in the waves to energy. 2 of them are mentioned below.

14-9-1 Wave Star

The device (converter) consists of 2 rows of each twenty floats. Forty floats in all. The floats are attached to a structure, which sits on piles. All moving parts are above water. The converter is normally installed so it is oriented towards the dominant wave direction. When the wave passes, the floats pump hydraulic energy into a common transmission system. Because the converter is oriented towards the dominant wave direction, the floats pump energy into the transmission system distributed over time, which produces an even output to a hydraulic motor which drives a generator direct. A frequency converter locks the generator onto the grid. Wave Star Energy in scale 1:10 has now been in operation and grid connected since April 2006 at Nissum Bredning in the North Western corner of Denmark. Since then the test machine has logged almost 4,000 operational hours in the first 6 months of daily operation, been through 7 significant storms and is a major step on the way towards commercial wave power.




14-9-2 Wave Dragon

This kind of wave energy device consists of a angled platform gathering the waves in a kind of reservoir. From this reservoir the water flows into hydro turbines running an electro generator. The Wave Dragon will be constructed in steel and concrete and have been tested as a pilot plant at Nissum Bredning.



Figure 14.3 - The Wave Dragon pilot plant at Nissum Bredning.

Figure 14.2 - The Wave Star pilot plant at Nissum Bredning.

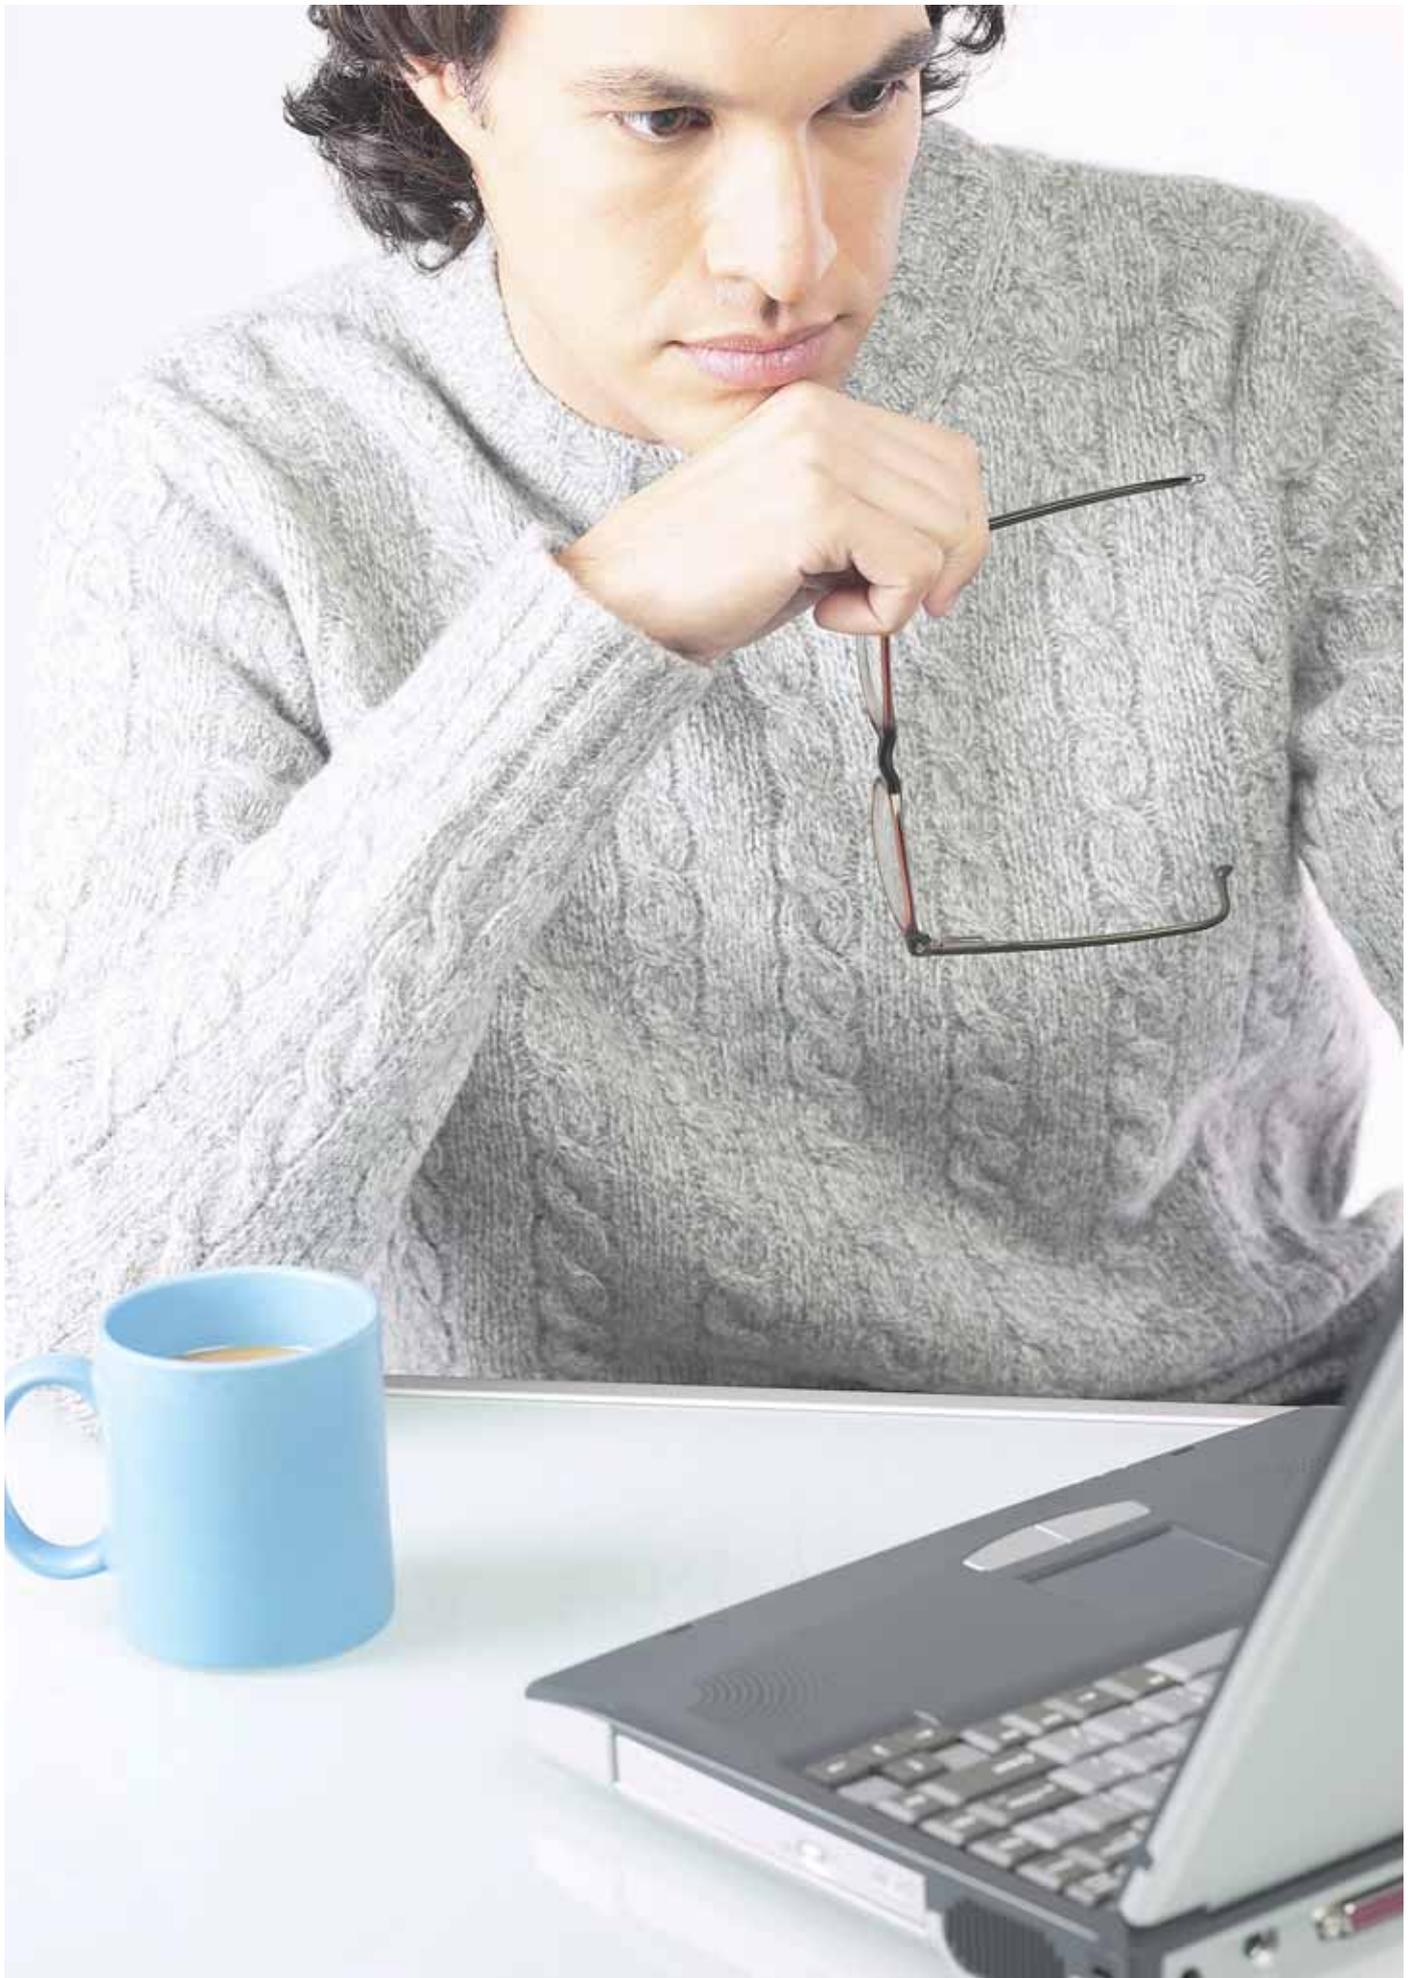

Chapter 15

Education and Training in Denmark

In order to ensure the industry's demands for quality and effectiveness, employees within the offshore sector need the proper form of education and training.

Offshore education is divided into 3 main areas:

- Safety training
- Vocational training for skilled workers
- Master and bachelor degrees for engineers etc.
- Basic courses for blue collar workers

With more than 40 years of experience from offshore projects, Danish educational institutions and offshore companies have a long tradition for educating people working on offshore projects. Educational institutions active in the field are found nationwide, the majority being based in Esbjerg. Representatives are:

- Several institutions offering safety training for offshore oil/gas workers, offshore wind workers as well as employees in other areas of the maritime sector
- 2 universities offering master and bachelor modules in a range of offshore relevant courses as well as carrying out research to ensure development of new knowledge
- 3 major schools offering vocational training for skilled workers in offshore relevant areas
- A wide range of private companies providing courses at many levels for their current and/or future employees
- Several private companies offering different offshore relevant education modules aimed primarily at personnel employed by other companies
- Several technical schools offering different offshore relevant courses for blue collar workers


The table below (figure 15.1) gives an overview of different levels of education and training.

NB: The table is not complete; it only gives a general overview. Several other education and training centers offer a wide range of degrees and courses.

Also explore www.offshoreuddannelse.dk

Esbjerg Institute of Technology	Masters and bachelors
Technical University of Denmark – DTU	Masters and bachelors
University of Southern Denmark	Masters and bachelors
Aarhus University	Masters and bachelors
Copenhagen University	Masters and bachelors
AMU -Vest	Vocational training
Business Academy Southwest – EASV	Vocational training
EUC Vest	Vocational training
FORCE Technology	Vocational training
Fredericia Maskinmesterskole	Vocational training
GEUS	Vocational training
ARBEJDSMILJØEksperten A/S	Safety training
Esbjerg Safety Consult A/S	Safety training
Falck Nutec Esbjerg A/S	Safety training
Maersk Training Esbjerg	Safety training
ResQ	Safety training
Offshore Center Danmark	Introduction courses

Table 15.1 – Offshore specific education and training in Denmark.

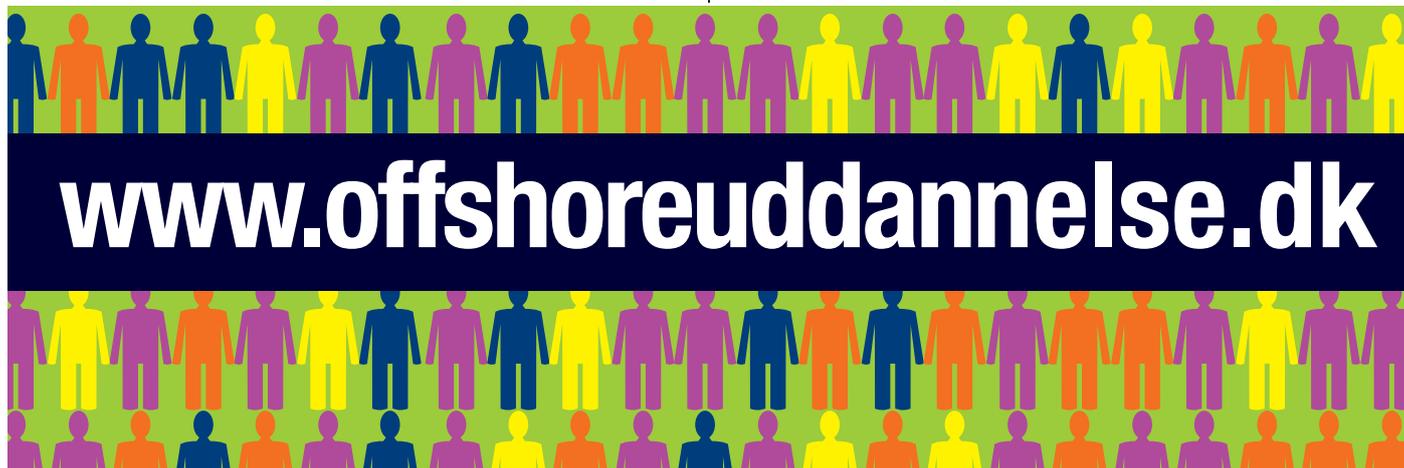



Offshore Center Danmark

Offshore Center Danmark is the official national competence and innovation center for the Danish offshore industry. On behalf of its +230 member companies and institutions Offshore Center Danmark push development with the aim of growth within the Danish offshore industry.

Focus areas are oil & gas, offshore wind, the offshore maritime area and wave energy.

Core activities include: Facilitation of networking activities in between businesses and between businesses and universities, Management of technical and industry-wide development projects, Knowledge sharing activities including conferences, B2B events and promotion of the Danish offshore sector in an international perspective.

The centre works through initiatives and activities which develop knowledge and promote the cooperation among all the players in the Danish offshore sector: Industries, consultants, educational institutions and the authorities.

Since initiation in 2003, more than 230 companies and knowledge institutions have joined the centre, more than 50 conferences and workshops within offshore related subjects have been hosted and more than 40 industry development projects have been coordinated.

Further information can be found at www.offshorecenter.dk